

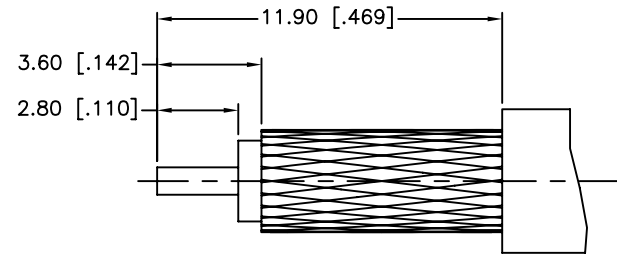



REV.	DATE	ECR NO.	DESCRIPTION
NC	08/22/12	XXXXXX	INITIAL RELEASE

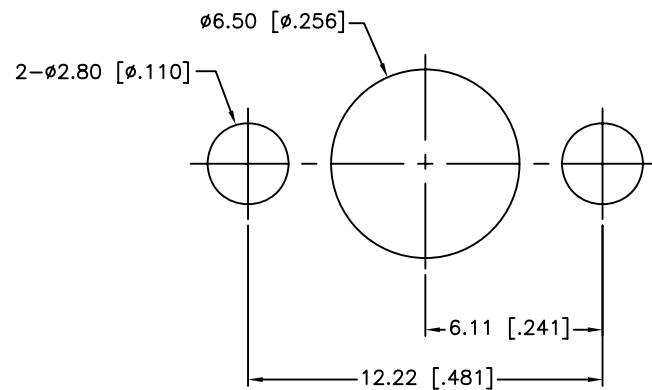



RECOMMENDED
CABLE STRIPPING DIM'S

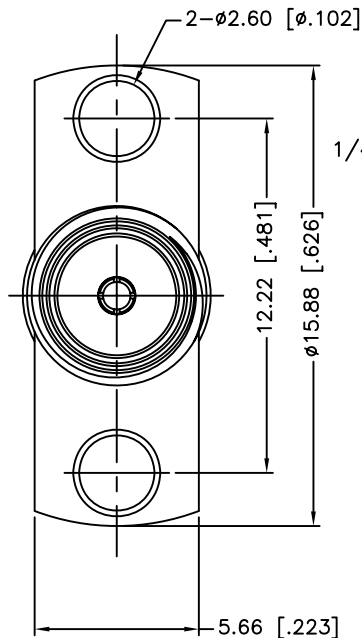

RECOMMENDED
MOUNTING HOLE

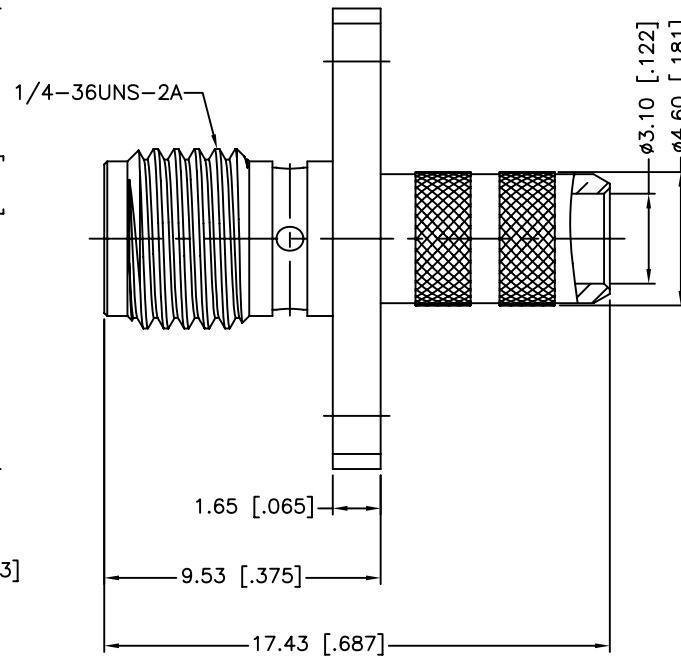

SPACER

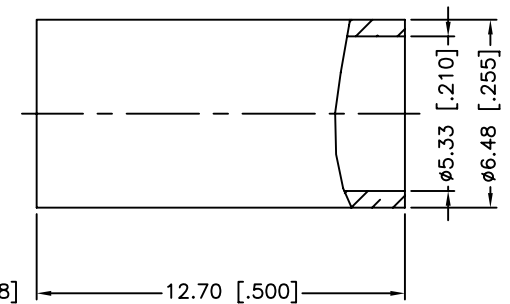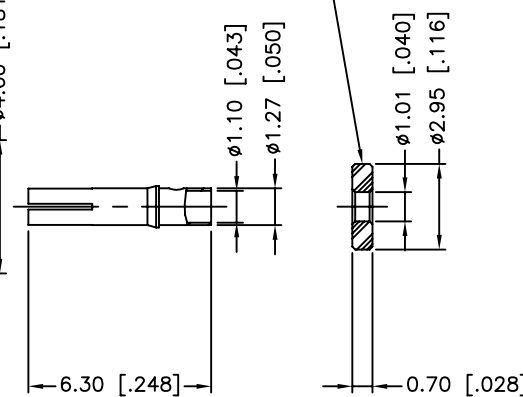

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-12.4 GHZ
3. ELECTRICAL PERFORMANCE MAY VARY DEPENDING ON THE TYPE OF CABLE BEING USED
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -65°C TO +165°C
7. CRIMPED FERRULE
HEX CRIMP SIZE .213"
8. CONTACT PIN TO SOLDER

5 FERRULE COPPER GOLD 1 4 SPACER PTFE NATURAL 1 3 CONTACT PIN BERYLLIUM COPPER GOLD 1 2 INSULATOR PTFE NATURAL 1 1 BODY BRASS GOLD 1				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"		APPROVALS DRAWN M.ZHANG CHECKED ISSUED SHEET 1 OF 1 CAD FILE C:/CONNEX/132436.DWG		DATE 08/22/12		Amphenol Connex		
DO NOT SCALE DRAWING				PART DESCRIPTION SMA 2-HOLE FLANGE CRIMP JACK (FOR RG-58C/U, 58/U, LMR-195 CABLE)		PART NO. 132436		DWG. NO. 132436.DWG		REV. NC	SIZE A	SCALE NA