

NOTES:

1. ELECTRICAL:


- A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC TO 18 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE:500 VRMS. MIN.

2. MECHANICAL:

- A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C

3. MAX. PANEL THICKNESS=2.4 MM

REV.	DATE	ECR NO.	DESCRIPTION
NC	03/28/06	XXXXXX	INITIAL RELEASE
A	07/31/07	XXXXXX	REVISE PART ORIENTATION
B	02/22/13	2449	CORRECT DESCRIPTION, UPDATE DRAWING FORMAT

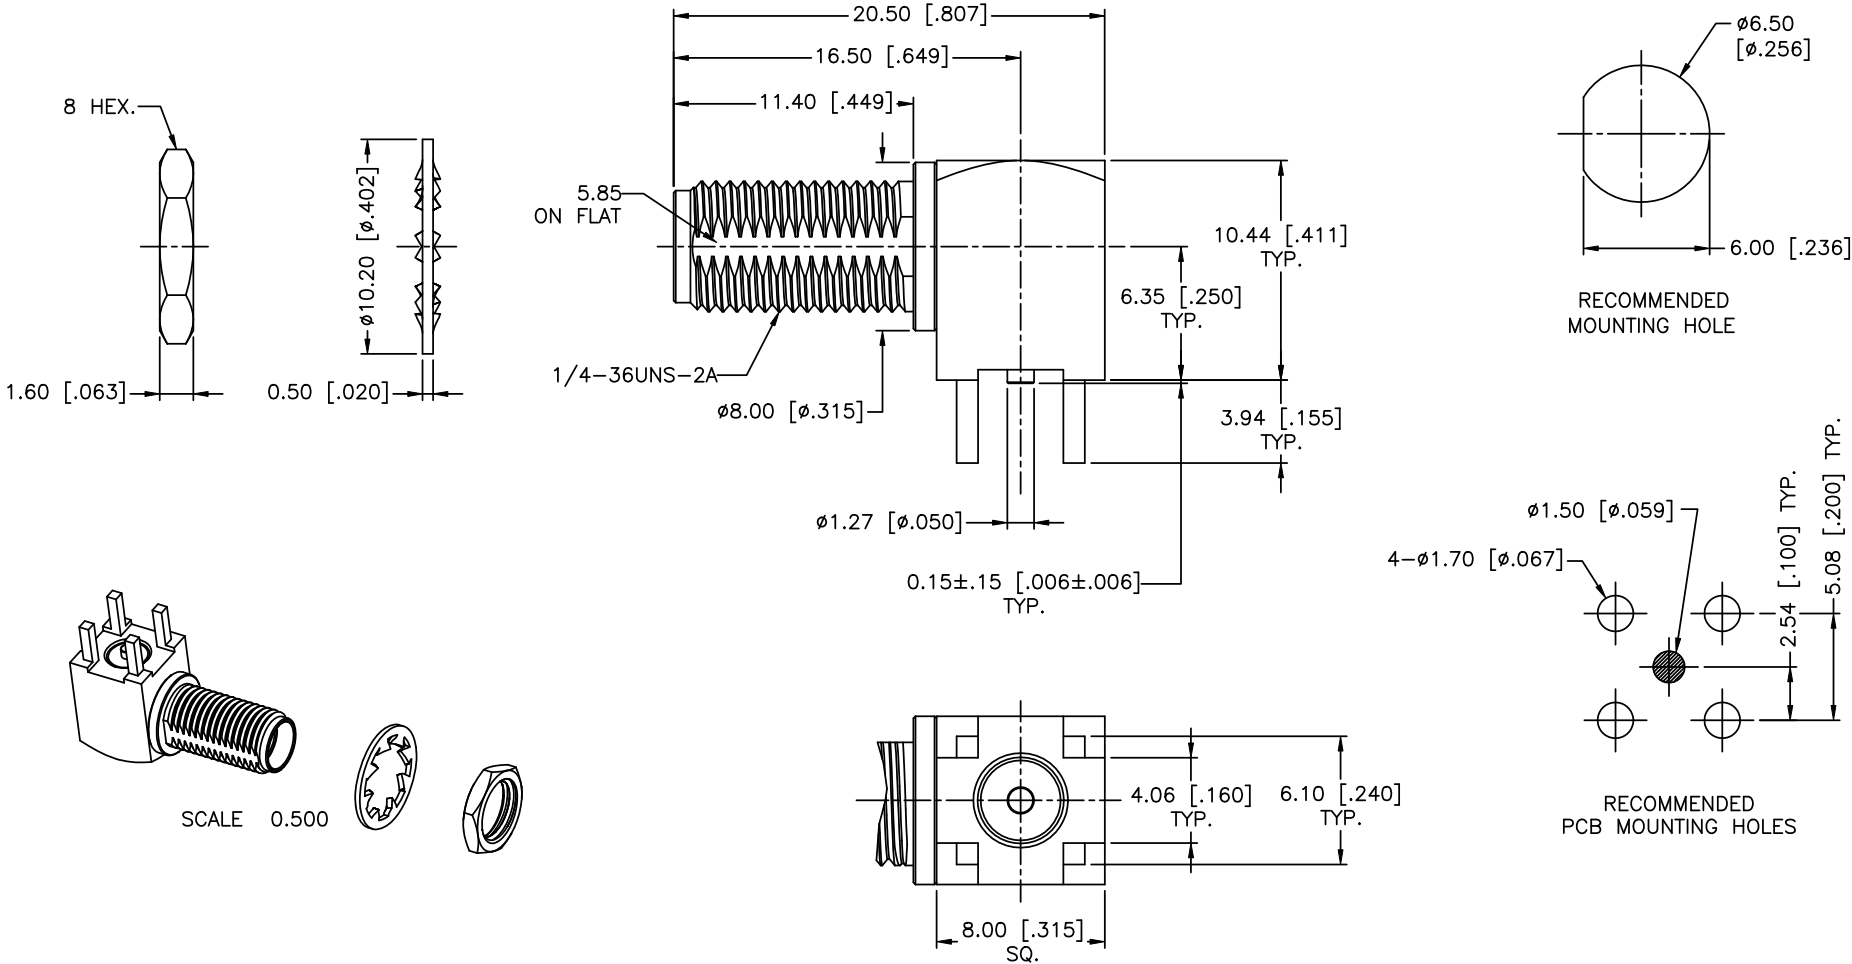

7	HEX NUT	BRASS	GOLD	1
6	LOCK WASHER	BRASS	GOLD	1
5	COVER	BRASS	GOLD	1
4	CONTACT PIN	BRASS	GOLD	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	2
1	HOUSING WITH BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"

APPROVALS	DATE
DRAWN T.DENG	02/22/13
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/132203-13.DWG	

Amphenol Connex			
PART DESCRIPTION			
SMA R/A BULKHEAD P.C. MOUNT JACK, SURFACE MOUNT CENTER CONTACT			
PART NO. 132203-13			
DWG. NO. 132203-13.DWG	REV. B	SIZE A	SCALE NA

DO NOT SCALE DRAWING