

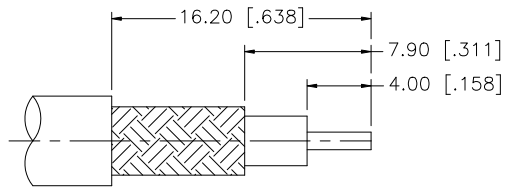
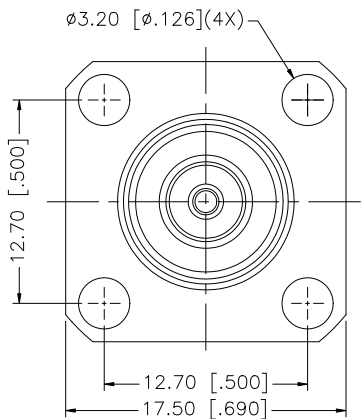
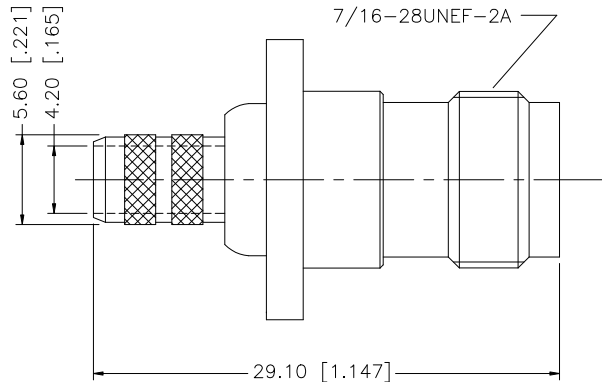


REV.	DATE	DESCRIPTION
A	07/13/05	UPDATE DRAWING FORMAT
B	08/19/07	REVISE BODY STYLE



RECOMMENDED
CABLE STRIPPING DIM'S



					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex			
8						DRAWN	G.R.S.	08/19/07	PART DESCRIPTION		
7						CHECKED					
6						ISSUED					
5						SHEET	1 OF 1				
4	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	PART NO.			TNC PANEL CRIMP JACK (FOR LMR 240/8X CABLE)		
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		DWG. NO.			112523		
2	INSULATOR	TEFLON	NATURAL	1		REV.			A		
1	BODY	BRASS	NICKEL	1		SIZE			A		
DESCRIPTION					DO NOT SCALE DRAWING	SCALE			NA		
						CAD FILE			C:/112/112523.DWG		