


NOTES:

1. MATERIALS AND FINISHES:
HEX NUT - BRASS, NICKEL PLATING
LOCK WASHER - BRASS, NICKEL PLATING
FERRULE - BRASS, NICKEL PLATING
GASKET - SILICONE RUBBER, RED
INSULATOR DISC - PTFE, NATURAL
BODY - BRASS, NICKEL PLATING
CONTACT - BRASS & PHOSPHOR BRONZE, GOLD PLATING
INSULATOR - PTFE, NATURAL
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: 0-4 GHz
C. D.W.V: 1500 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65°C TO +165°C
4. CRIMPED FERRULE HEX CRIMP SIZE .128"
5. CRIMPED CONTACT PIN HEX CRIMP SIZE .052"
6. PANEL THICKNESS=5.71~6.5mm

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	22-Jul-15	50559	MZ

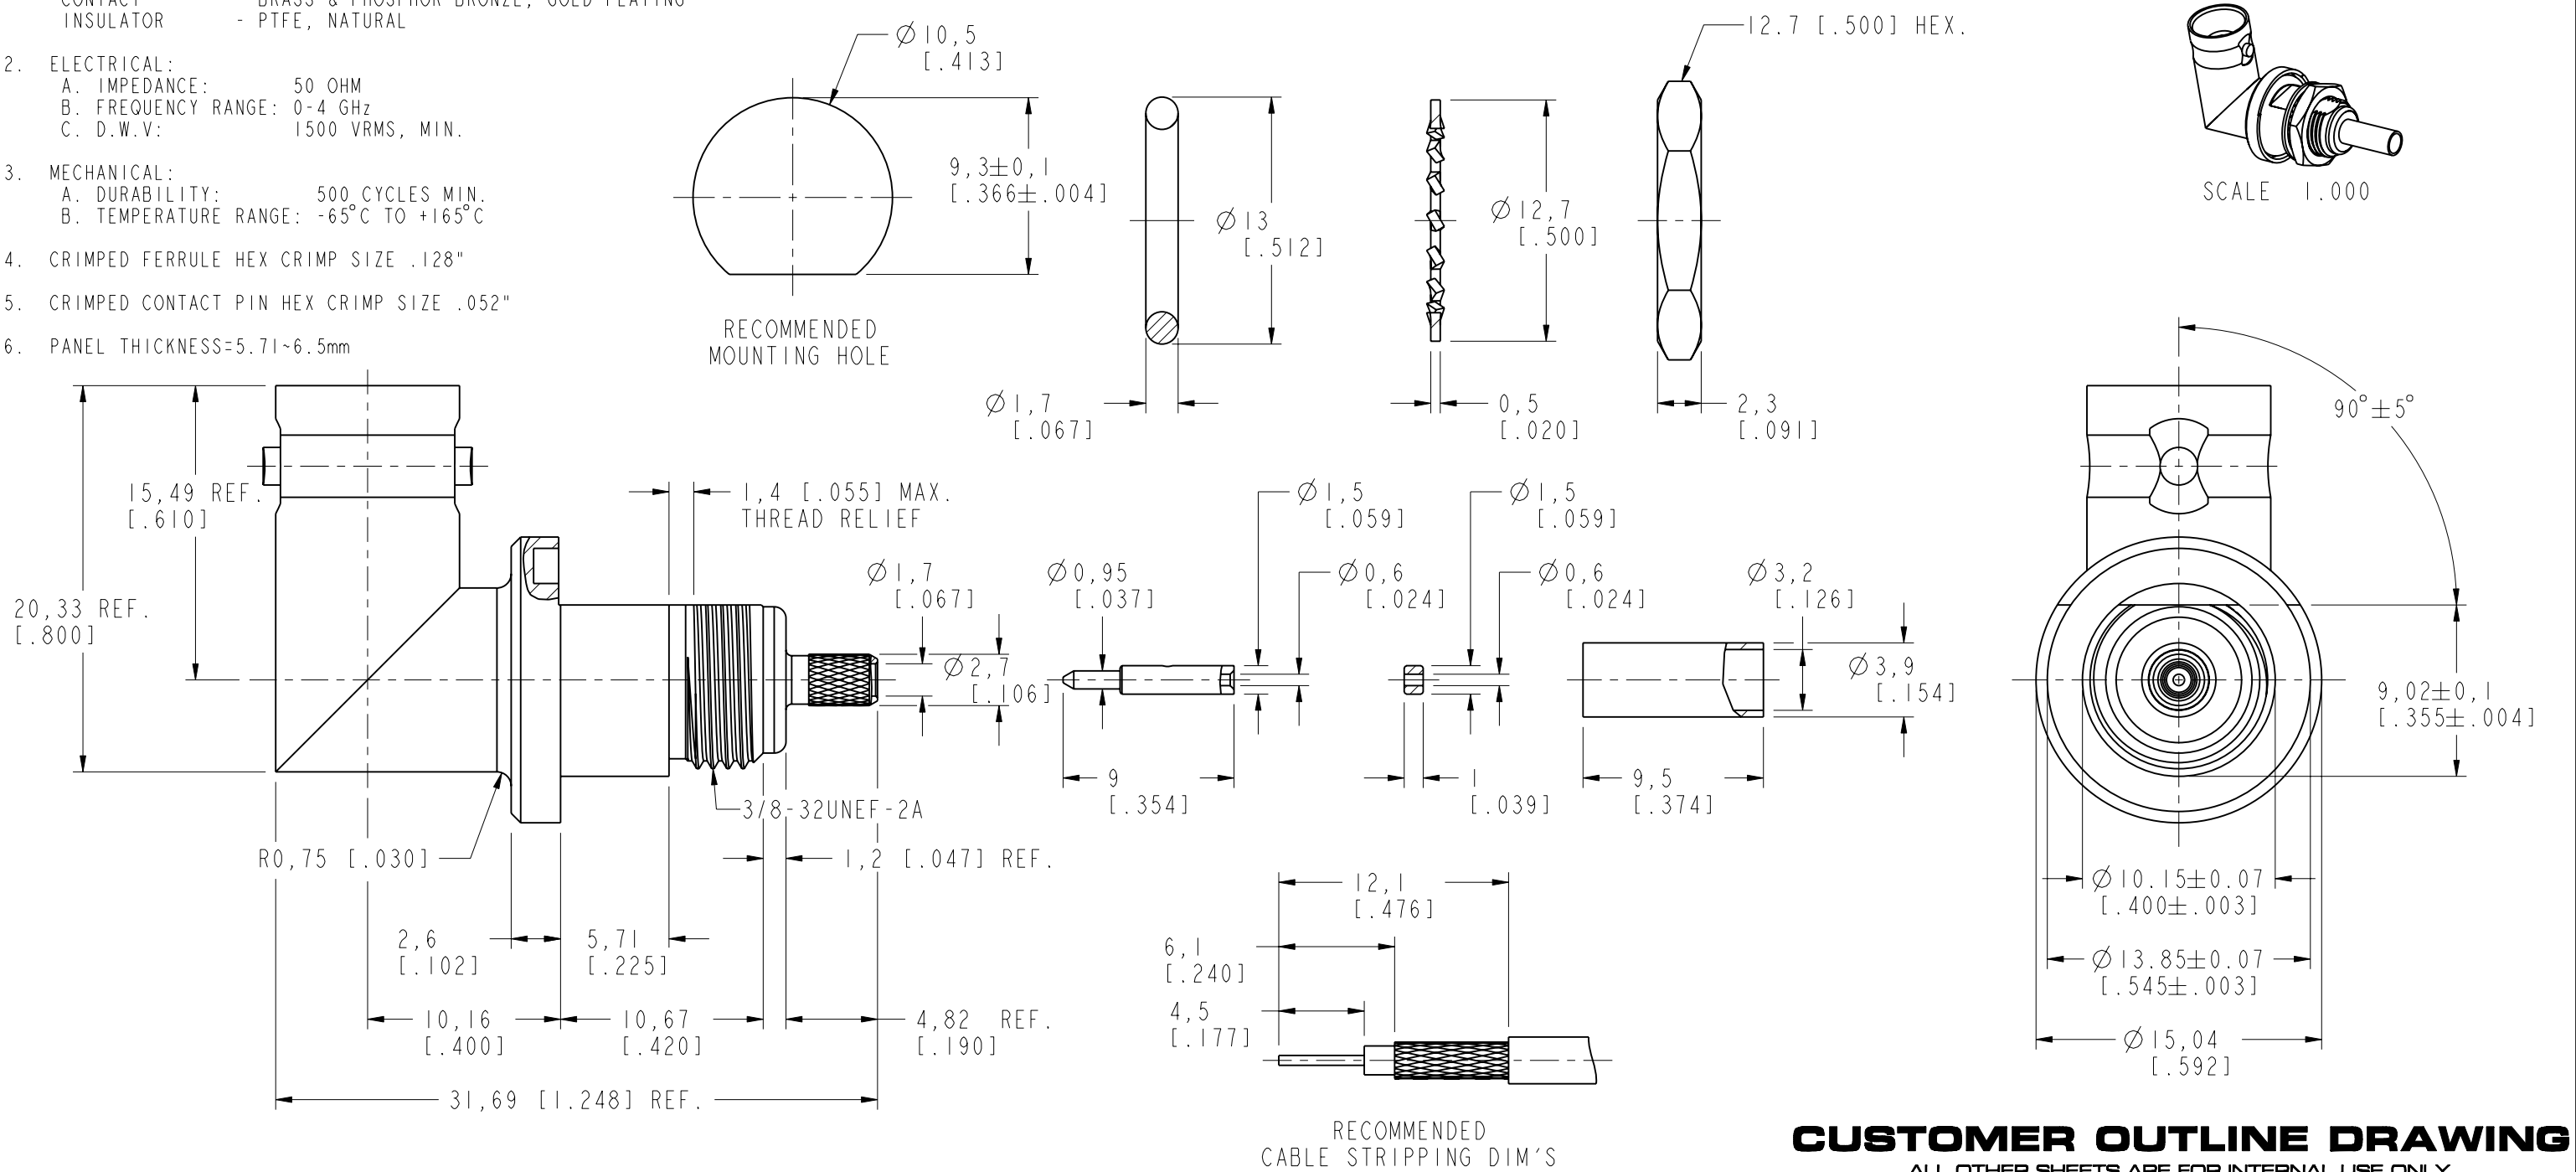

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp.. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp.. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

-

REFERENCE

EAR# 6763 AND

CONFIGURATION LEVEL: In Work

FINISH

DRAWN
M. ZHANG

DATE
22-Jul-15

ENGINEER
S. DUAN

DATE
22-Jul-15

APPROVED
S. HSIHE

DATE
23-Jul-15

CAD FILE

TITLE
BNC R/A BULKHEAD JACK,
WITH THE BRAZED-TYPE
BODY, (FOR RG-316/U)

SCALE: 3.0:1.0 SHEET 2 OF 2

DWG SIZE
B

REV
A

Amphenol RF

www.amphenolrf.com

DRAWING NO. B6322A1-NT3G-316U-50

ITEM NO. 016322AAA36NA5F

PART NO. 112768-10