

NOTES: I. MATERIALS AND FINISHES: BODY - BRASS, GOLD PLATING (.000010 THICK MIN) CONTACT - BeCu, GOLD PLATING (.000030 THICK MIN) INSULATOR - PTFE 2. ELECTRICAL: A. IMPEDANCE: 50 OHM B. FREQUENCY RANGE: DC - 6 GHz C. VSWR(RETURN LOSS): -32 dB TO 3 GHz, -25 dB TO 6 GHz D. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN. 3. MECHANICAL: A. DURABILITY: 500 CYCLES MIN. B. TEMPERATURE RANGE: -65° C TO 165° C

4. PACKAGING:

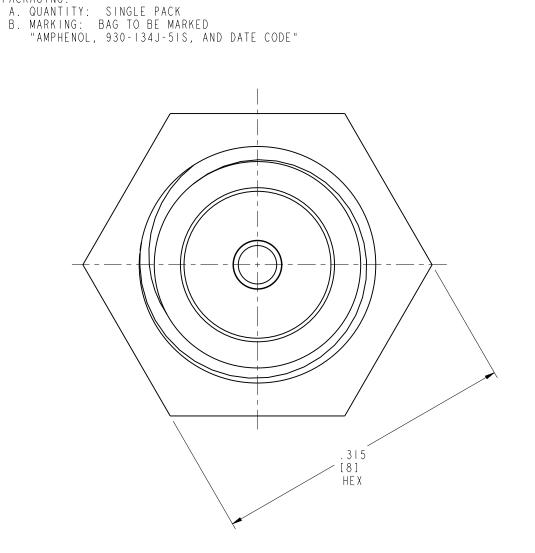

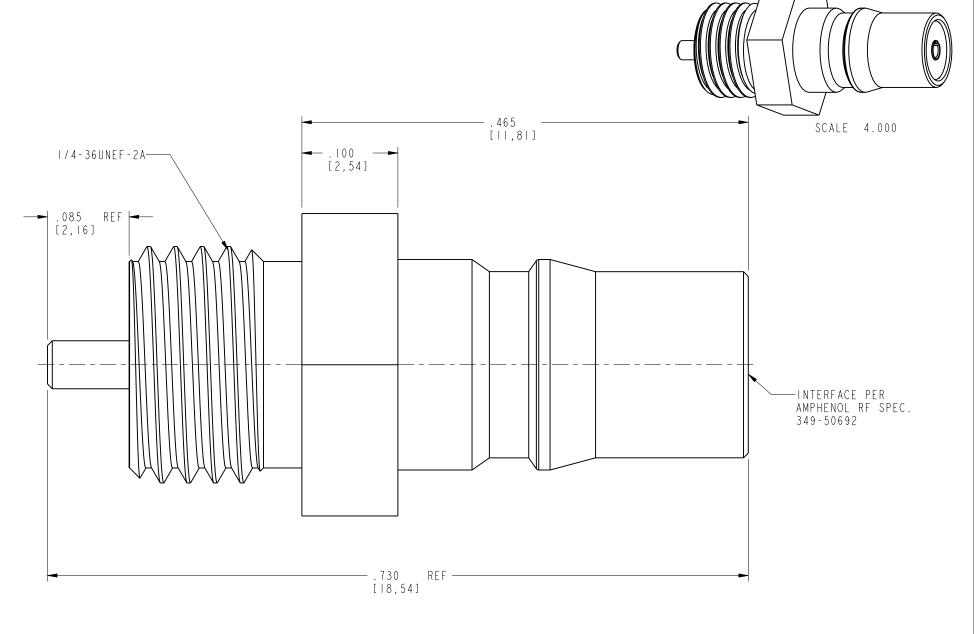

CUSTOMER OUTLINE DRAWING

REVISIONS

DATE

2/26/04

ECO

44818

APPR

KJC

DESCRIPTION

RELEASE TO MFG

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL	DRAWN K. CAPOZZI	DATE 01 - Aug - 03	QMA(F) STR	Amphenol RF Danbury, CT, USA
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting	REFERENCE EAR #1076 ASSYF6_OMA	K. CAPOZZI	ENGINEER K. CAPOZZI APPROVED O. BARTHELMES DATE 01-Aug-03 W/ SOLDER POST	Tainan, Taiwan Shenzhen, China	
				W/ SOLVER FOST	www.amphenolrf.com SCALE: 10.0:1 SHEET 2 OF 2
rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		CAD FILE 1:\QMA\930-134J-51S		CODE ID DWG SIZE DRAWING NO. 74868 B 930-134J-51S 03	

930-134J-51S

THIRD ANGLE PROJ.

DRAWING NO.

REV

⊕ 🖯 🛛