



NOTES:

1. MATERIALS AND FINISHES:
BODY - BRASS, GOLD PLATING
CONTACT - BeCu, GOLD PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC - 3 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
D. RETURN LOSS: 35 dB MIN. @ DC - 1.2 GHz,
3. MECHANICAL:
A. DURABILITY: 500CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO 165° C
4. PACKAGING:
A. COMPONENT LOADER PER 13" REEL: 1000 PCS

THIRD ANGLE PROJ.



REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG	03-Apr-12	48997	IX

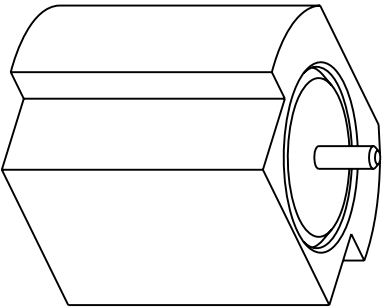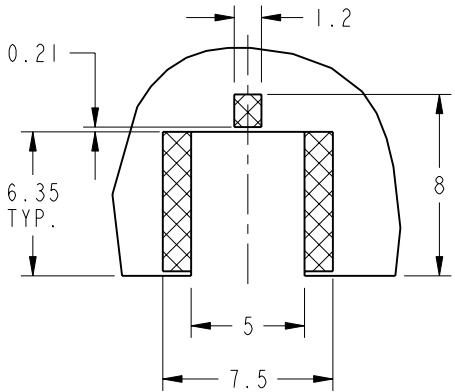

SCALE 6.000

RECOMMENDED PCB
CUT OUT AND TRACE

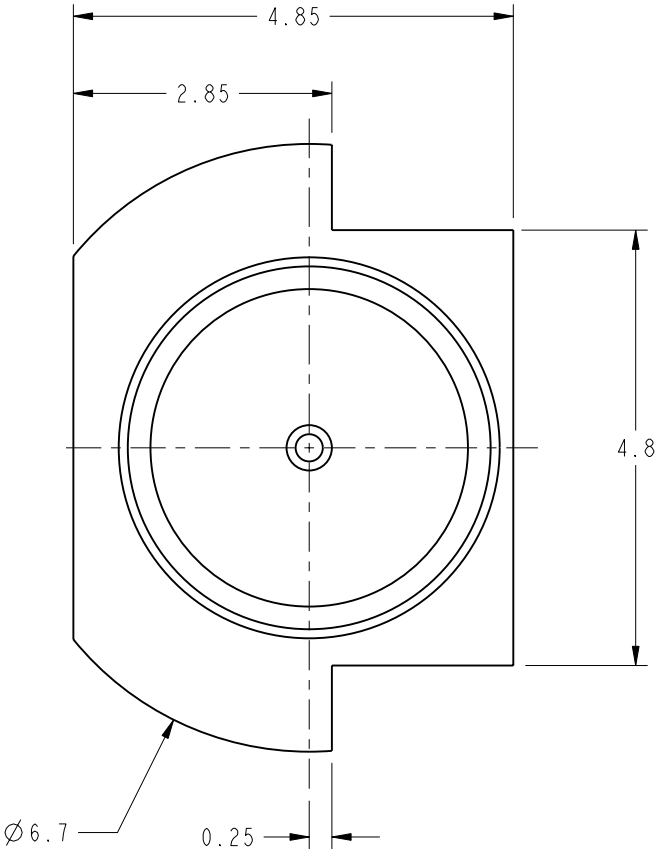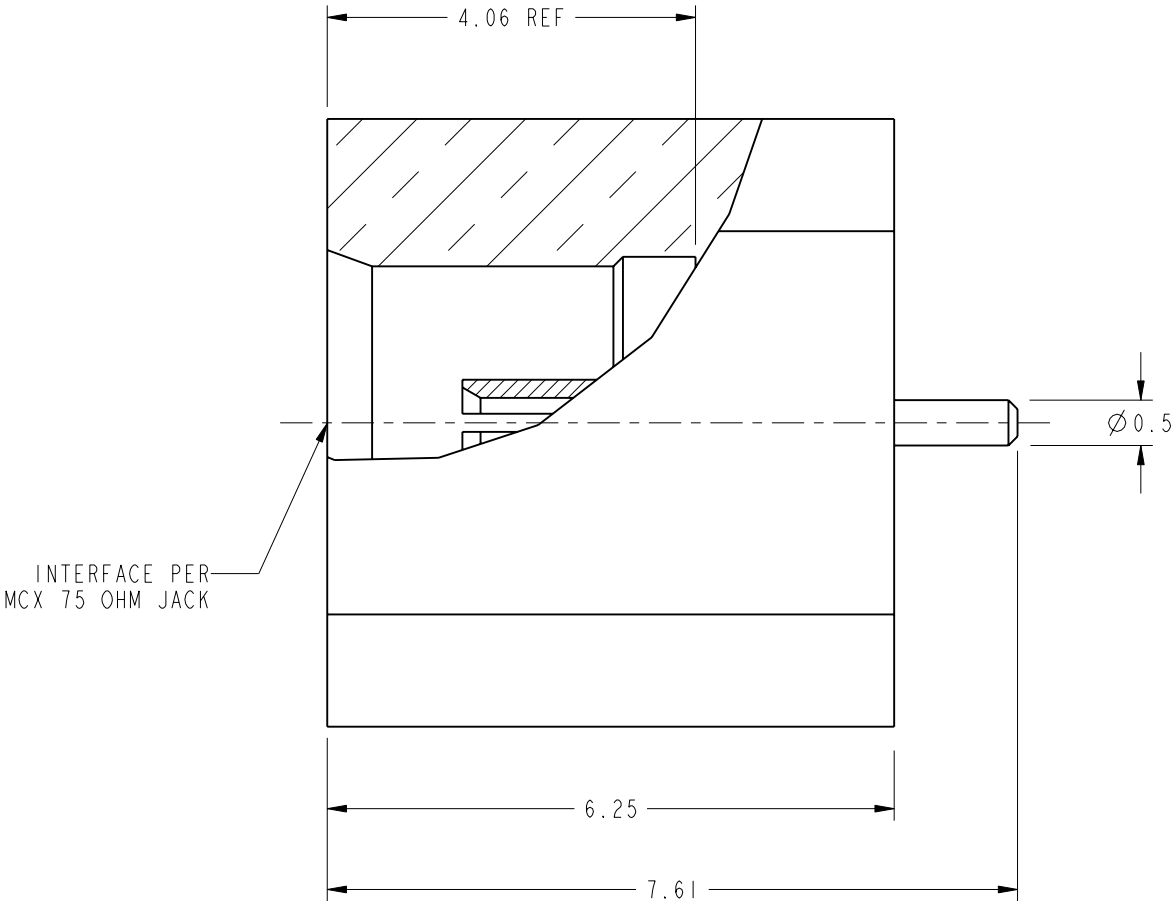

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES -	DRAWN I.XU	DATE 03-Apr-12	TITLE 6.25 MM PCB MOUNT MCX JACK		Amphenol RF www.amphenolrf.com	
		ENGINEER D.DAVE	DATE 3/12/12				
	REFERENCE EAR # 4470 AND	APPROVED S.HSIEH	DATE 05-Apr-12			SCALE: 12.0:1.0	SHEET 2 OF 3
	CONFIGURATION LEVEL: ☐☐☐	CAD FILE	DWG SIZE B	REV A	DRAWING NO. 919-301J-7IPT		
	FINISH				ITEM NO. 919-301J-7IPT		
				PART NO.919-301J-7IPT			


NOTES:

1. MATERIAL: CONDUCTIVE POLYSTYRENE, BLACK; THICKNESS: 0.40±0.05
2. PACKING LENGTH PER 13" REEL: 12.6 METERS
3. COMPONENT LOADER PER 13" REEL: 1000 PCS
4. ALL DIMENSIONS MEET EIA-481-2A REQUIREMENTS

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	03-Apr-12	48997	IX

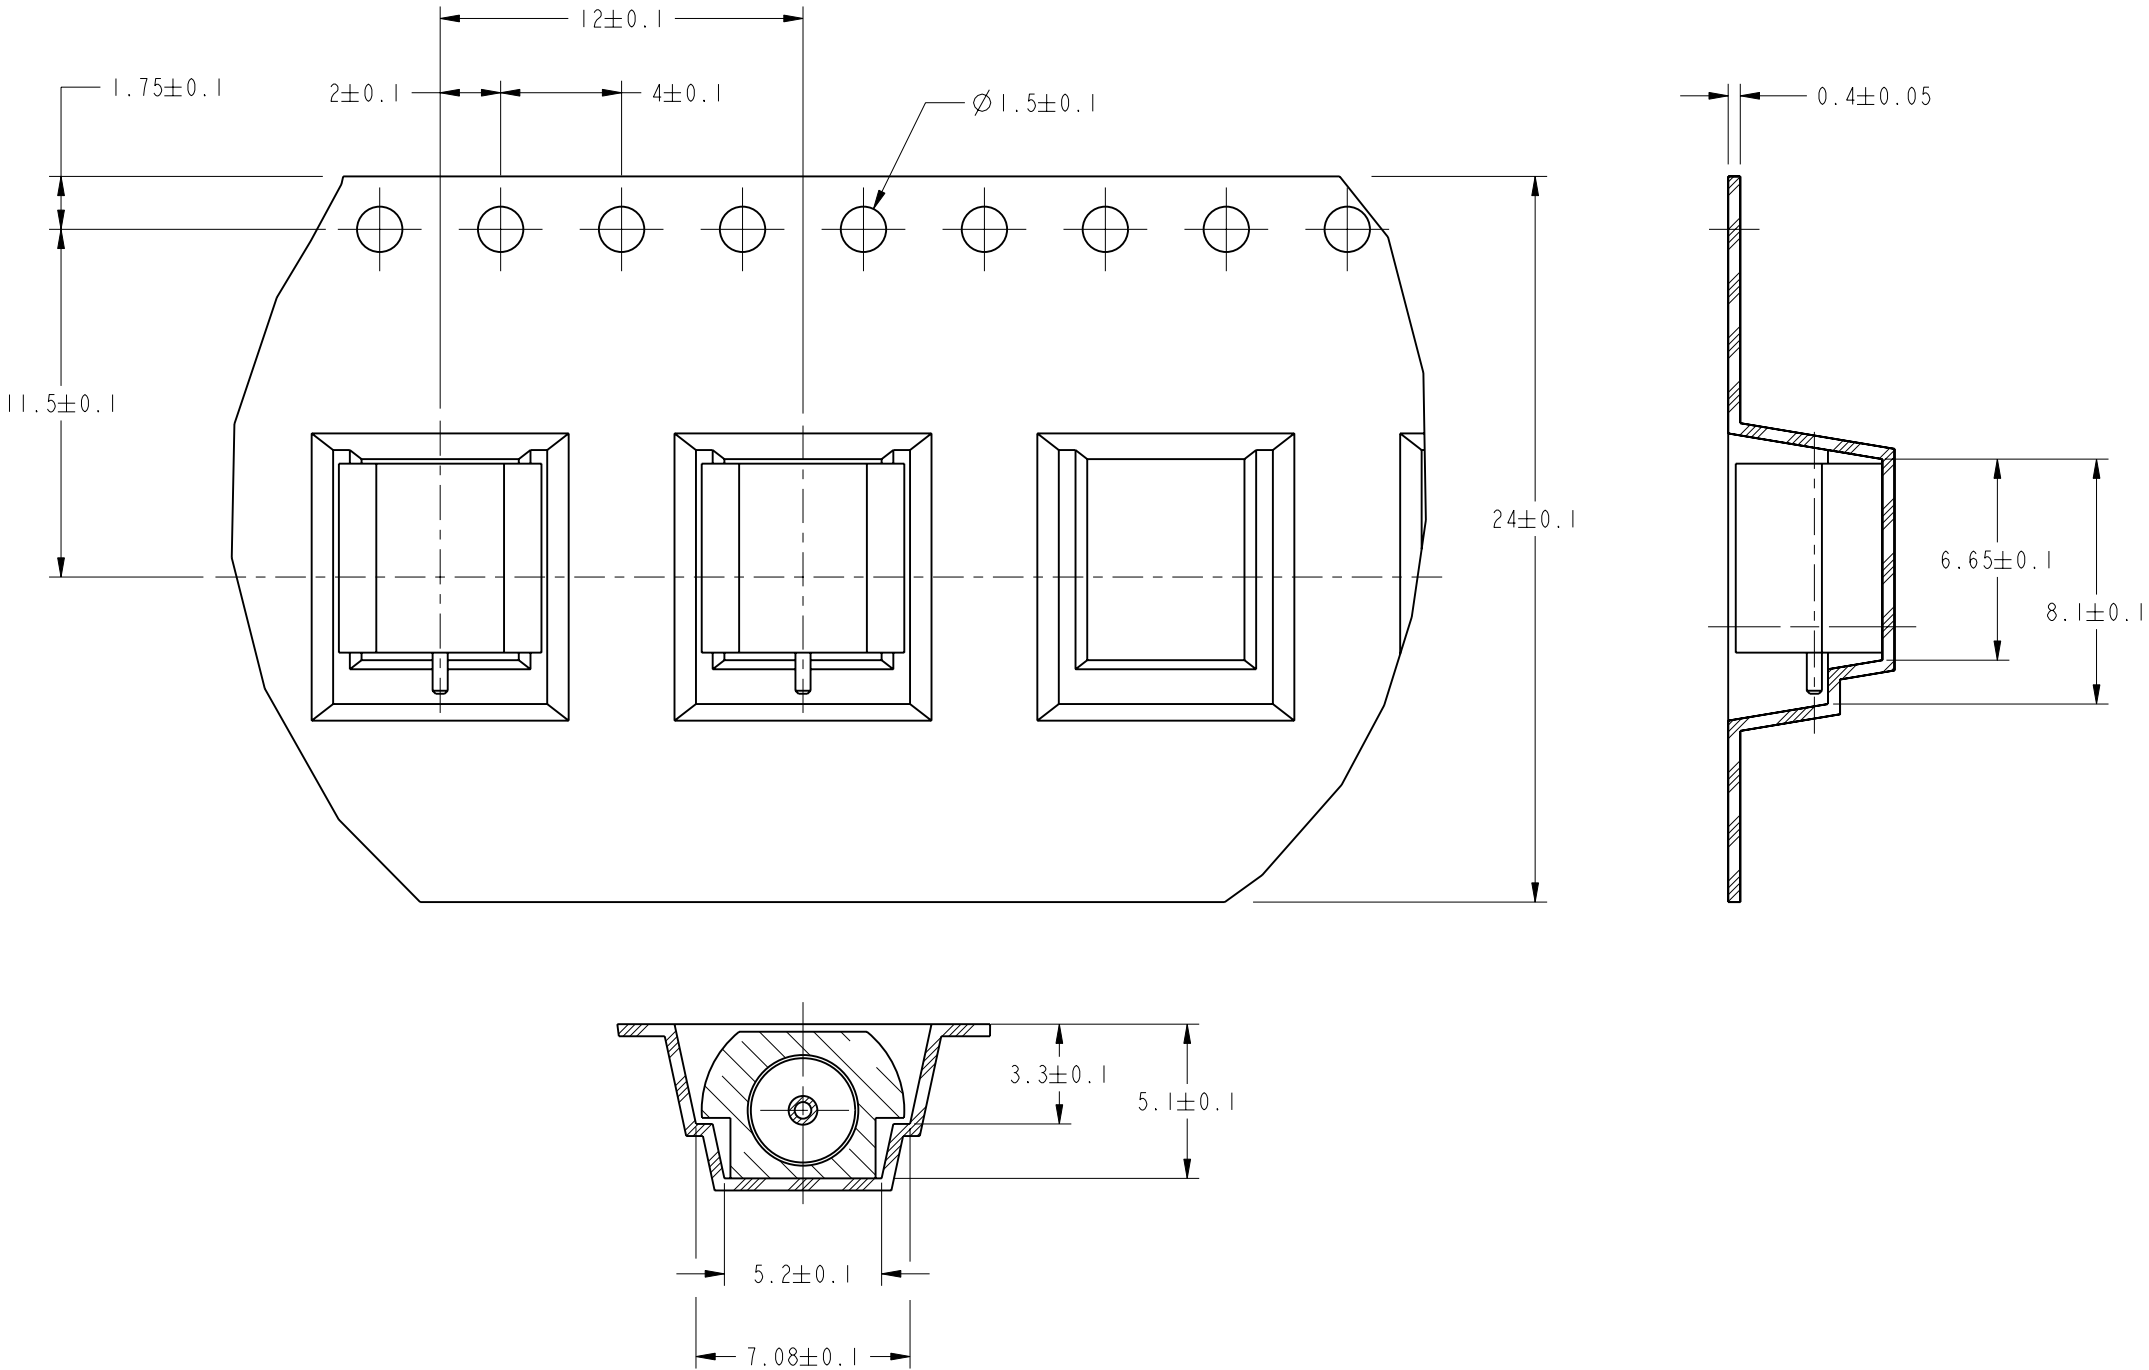

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL SEE NOTES -	DRAWN I.XU	DATE 03-Apr-12	TITLE 6.25 MM PCB MOUNT MCX JACK		Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com	
		ENGINEER D.DAVE	DATE 3/12/12				
	REFERENCE EAR # 4470 AND	APPROVED S.HSIEH	DATE 05-Apr-12	SCALE: 12.0:1.0		SHEET 3 OF 3	DRAWING NO.919-301J-7IPT
	CONFIGURATION LEVEL: ☐ ☐ ☐	CAD FILE	DWG SIZE B		REV A	ITEM NO.919-301J-7IPT	
	FINISH					PART NO.919-301J-7IPT	

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.