



1. MATERIALS AND FINISHES:
BODY,CUBE BODY - BRASS, GOLD PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 6 GHZ
C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOLRF, 919-305J-51P, AND DATE CODE"

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	08-Dec-11	48822	RM
B	0.00±0.06 WAS 0.05±0.08	21-Jun-18	08403	KCE



SCALE 4.000

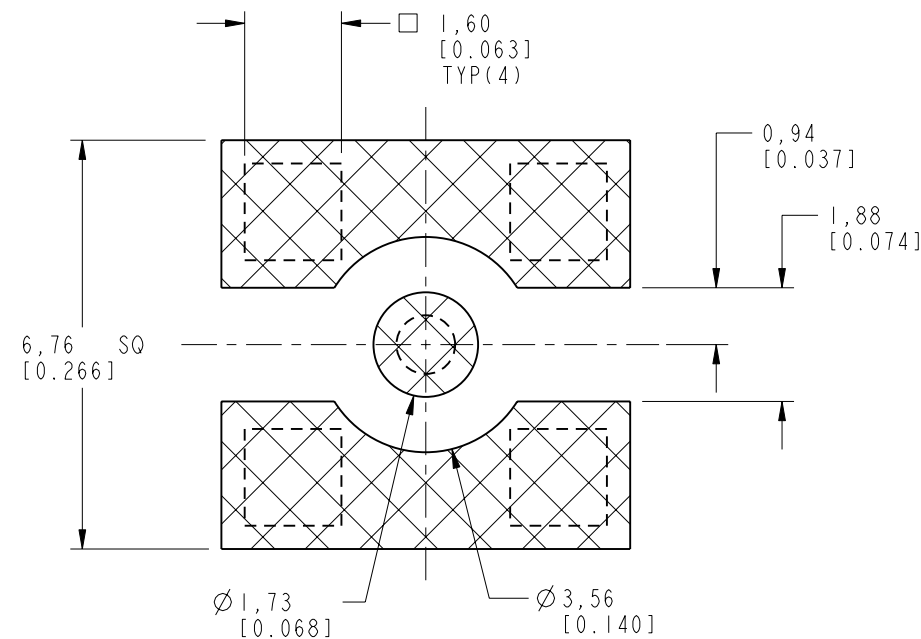

RECOMMENDED PCB PAD LAYOUT

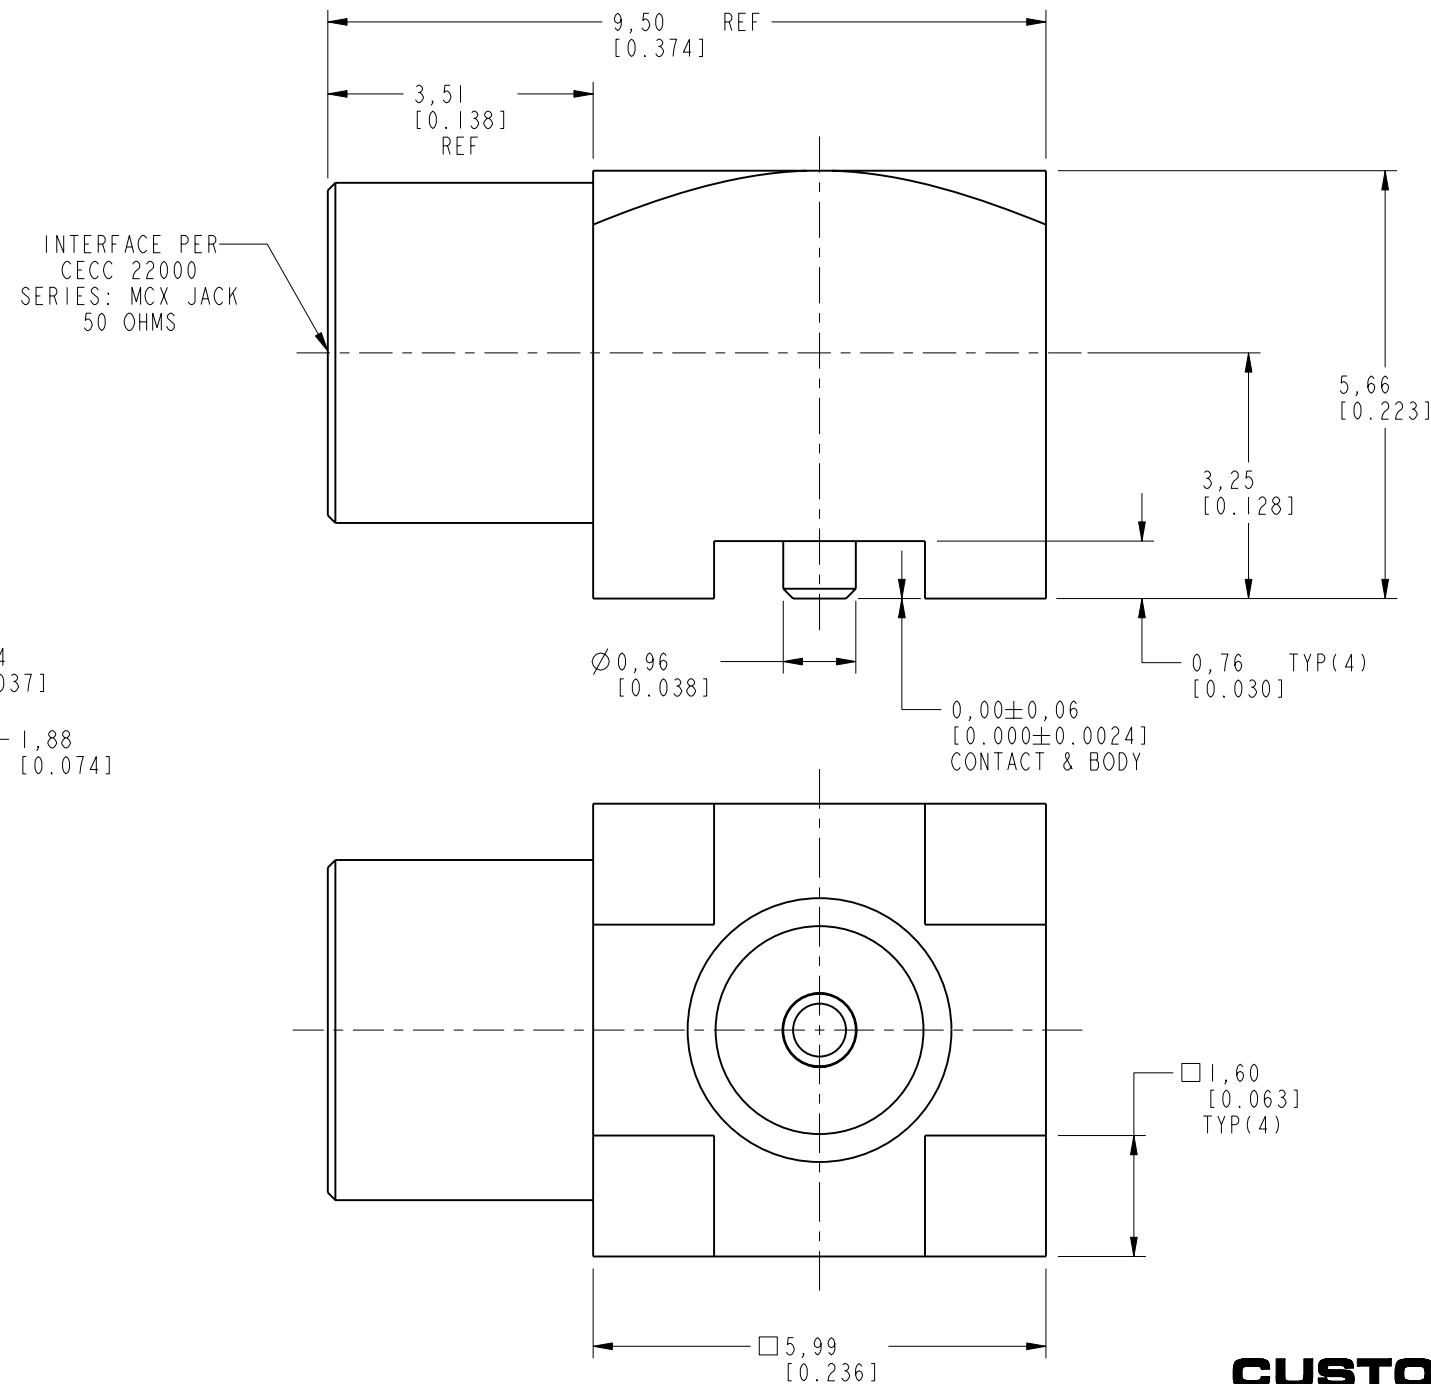

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL SEE NOTES REFERENCE EAR # 4809 CONFIGURATION LEVEL: In Work FINISH	DRAWN W. ZENG	DATE 27-Jun-18	TITLE MCX 50 OHM JACK PCB RECEPTACLE SCALE: 10.0:1.0 SHEET 2 OF 2 DWG SIZE B	Rev B	Amphenol RF www.amphenolrf.com DRAWING NO. 919-305J-51P ITEM NO. 919-305J-51P PART NO. 919-305J-51P
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		ENGINEER ABHAYA KISHORE	DATE 15-Jun-11			
		APPROVED S. HSIEH	DATE 27-Jun-18			