

	THIRD ANGLE PROJ. 🕀 🖯		
NOTES:		REV	DESCRIPT
I. MATERIALS AND FINISHES: BODY - NICKEL PLATED ZINC DIE CAST		Α	RELEASE TO
CENTER CONTACT - GOLD PLATED PHOSPHOR BRONZE		В	ADDED ∅ 0.03 A
INSULATOR - PE MOUNTING PINS - TIN PLATED BRASS			
TERMINALS - TIN PLATED COPPER WIRE			







	R F V	/ISIONS			
DI	ESCRIPTION		DATE	ECO	APPR
	EASE TO MFG.		/2 /03	44695	
ADDED Ø	0.03 AND Ø 0	.03	10/26/12	48607	MJS
Ø.505	SCALE	2.000			
	PANEL CUT-C SCALE				
. 6 2 •					
CUSTOME All other		CLINE D		NG	
ITLE BNC JACK, 75 OHM RT/ANGLE PCB MOU ZINC DIE CAST ROUND PINS			h e n o mphenolrf. -71043-1		
ALE: 4.0:1.0 SHEET 2 DWG SIZE B	2 OF 2	ITEM NO. 31-7 PART NO.31-7	0 4 3 -		

<pre>< 0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES $\pm 0.05mm$ $\pm 0.1mm$ $\pm 0.2mm$ $\pm 0.3mm$ $\pm 1^{\circ}$ NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are onfidential and not to be disclosed to any person other than those to whom they</pre>	MATERIAL SEE NOTES	DRAWN C. ZHANG ENGINEER C. ZHANG	DATE 24-SEPT-03 DATE 27-AUG-03	TITLE BNC JACK, 75 OHM RT/ANGLE PCB MOUNT ZINC DIE CAST	
are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting	REFERENCE EAR# 1078 AND 31-71043 CONFIGURATION LEVEL: In Work		DATE /2 /03	ROUND PINS SCALE: 4.0:1.0 SHEET 2 OF	
rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		CAD FILE		DWG_SIZE	
	FINISH		<u> </u>		

PACKAGING:

 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED
 "AMPHENOL, 3I-71043-1, AND DATE CODE"

 ACCOMODATES UP TO .188 PANEL THICKNESS.
 INSULATION RESISTANCE: 5000ΩΩ MIN.
 DON'T SCALE THIS DRAWING.
 UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE AFTER PLATING.

A. DURABILITY: 5000 CYCLES MIN. B. TEMPERATURE RANGE: -40°C TO +140°C


B. FREQUENCY RANGE: DC - I GHz C. RETURN LOSS: I7 dB MAX D. DIELECTRIC WITHSTANDING VOLTAGE: I500 VRMS, MAX.

A. NOMINAL IMPEDANCE: 75 OHM


2. ELECTRICAL:


3. MECHANICAL:

4. PACKAGING:

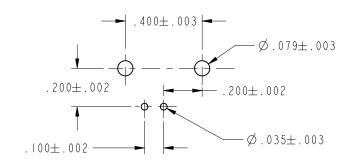



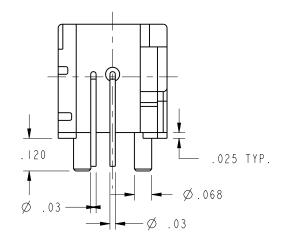

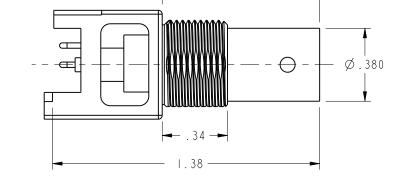

- .82 -

