NOTES:

1. MATERIALS AND FINISHES:

BODY & HEX NUT - BRASS (ASTM-B16 HO2, C36000), NICKEL PLATING CONTACT PIN - BRASS, GOLD PLATING INSULATOR - DELRIN, NATURAL FERRULE - COPPER, NICKEL PLATING

2. ELECTRICAL:


A. IMPEDANCE: B. FREQUENCY RANGE: 50 □HM DC - 11 GHz


3. MECHANICAL:

A. TEMPERATURE RANGE: -55° C TO +85° C

4. PACKAGING:

A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, 31-6156, AND DATE CODE

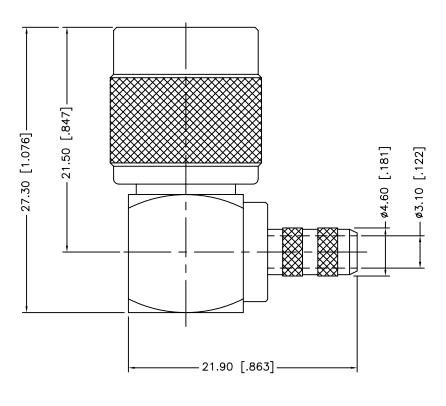



REVISIONS

RELEASE TO MFG.


 DATE
 ECO
 APPR

 8/29/06
 46222
 CPM/

31-6156

DRAWING NO. REV
THIRD ANGLE PROJ.

A

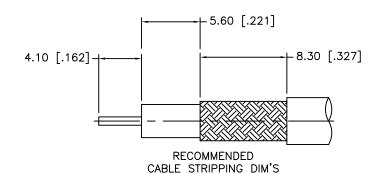

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

	MATERIAL	DRAWN	DATE			
		C. McGRATH	4/5/05			
		ENGINEER	DATE			
		O. BARTHELME:	S 4/5/05			
	REFERENCE	APPROVED	DATE			
		O. BARTHELME:	S 8/16/06			
,	CAD FILE	CAD FILE H:\DEPT611\TNC\031\ASSY\6156				

TNC	R/A	CRIMP	PLUG
(FOR	RG-	58/u,	58C/u,
	141/	u CABI	_E)

TITLE

CODE ID

74868

Amphenol
Amphenol Corporation
RF/Microwave Operations
Danbury, Conn. U.S.A. 06810

Α

	SCALE:	2:1	SHEET	OF	
().				ISSUE

DRAWING NO. DWG SIZE 31-6156 В