


- NOTES:
- MATERIAL AND FINISH (PLATING THICKNESS IN MICRO-INCHES):
BODY - BRASS, NICKEL PLATING
CONTACT - BRASS, GOLD PLATING
INSULATOR - DELRIN, NATURAL
 - ELECTRICAL:
A. IMPEDANCE:50 OHM
B. FREQUENCY RANGE: 0-11 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE:1500 VRMS. MIN.
 - MECHANICAL:
A. DURABILITY:500 CYCLES MIN.
B. TEMPERATURE RANGE:-40°C TO +85°C
 - CRIMPED FERRULE
HEX CRIMP SIZE .178"
 - CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

THIRD ANGLE PROJ.		REVISIONS			
REV	DESCRIPTION	DATE	ECO	APPR	
B	RELEASE TO MFG.	04-May-10	48160	FW	

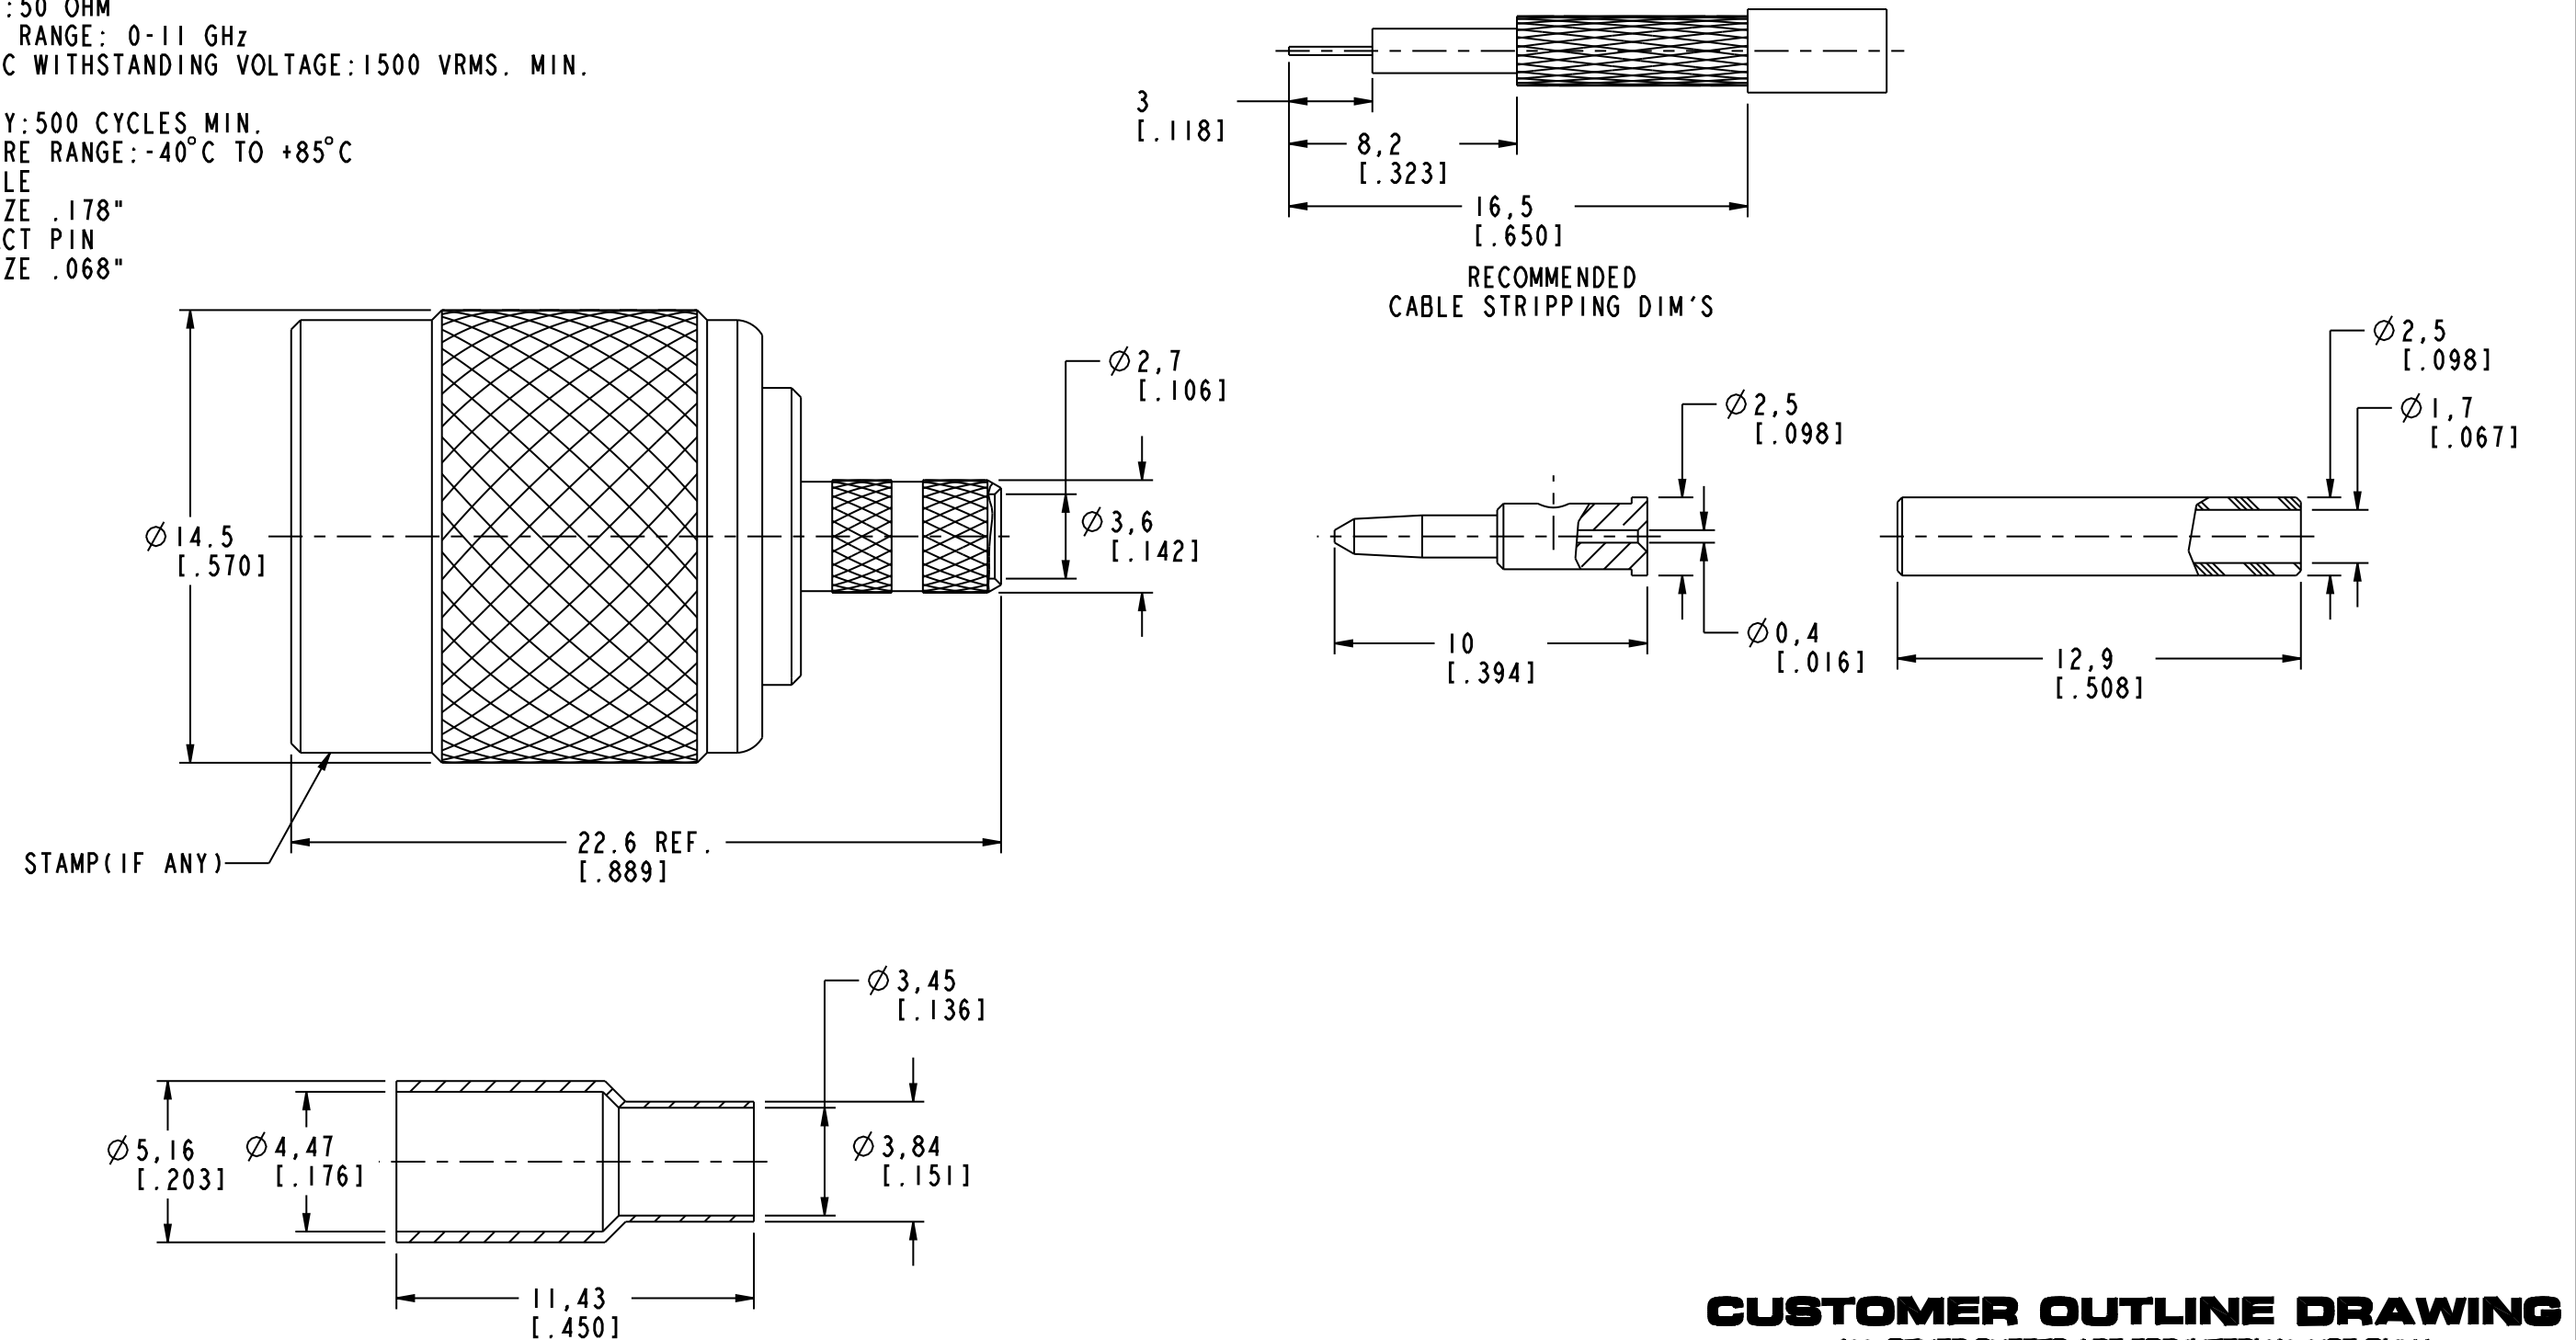

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

<div>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°</div> <div>NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.</div>	MATERIAL	DRAWN F. WANG	DATE 04-May-10	TITLE TNC CRIMP PLUG (FOR RGI79U/D CABLE)		Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com	
		ENGINEER CISSY	DATE 04-May-10				
	REFERENCE AND	APPROVED SCOTT	DATE 07-May-10				
	CONFIGURATION LEVEL:	CAD FILE	SCALE: 4.5:1.0		SHEET	2 OF 2	
	FINISH	I:/TNC/T1121E1-ND3G-179UD-50	DWG SIZE B		REV B	DRAWING NO. T1121E1-ND3G-179UD-50	
						ITEM NO. 021121AAG18ND5F	
						PART NO. 31-6147	