

1. MATERIALS AND FINISHES:
BODY ASSY, CALMP NUT (2), WASHER, BUSHING - BRASS, NICKEL PLATING (.000100 MIN THICK)
CONTACT - BeCu, SILVER PLATING (.000200 MIN THICK)
INSULATOR - COPOLYMER OF STYRENE
GASKET - SYNTHETIC RUBBER


2. ELECTRICAL:

- A. IMPEDANCE: 50 OHM
- B. FREQUENCY RANGE: DC - 11 GHz
- C. VSWR(RETURN LOSS): 1.3 (17.7 dB), MAX.
- D. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS, MIN.



3. MECHANICAL:
A. TEMPERATURE RANGE: -55°C TO $+85^{\circ}\text{C}$

4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, 36000, AND DATE CODE"

36000		REVISIONS				
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR	
THIRD ANGLE PROJ. 	--	RELEASE TO MFG.				
	H	SEE SHEET I	12/4/06	46341	CPM	

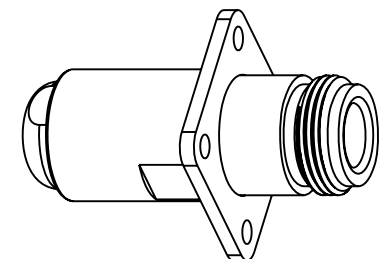

SCALE 1.000

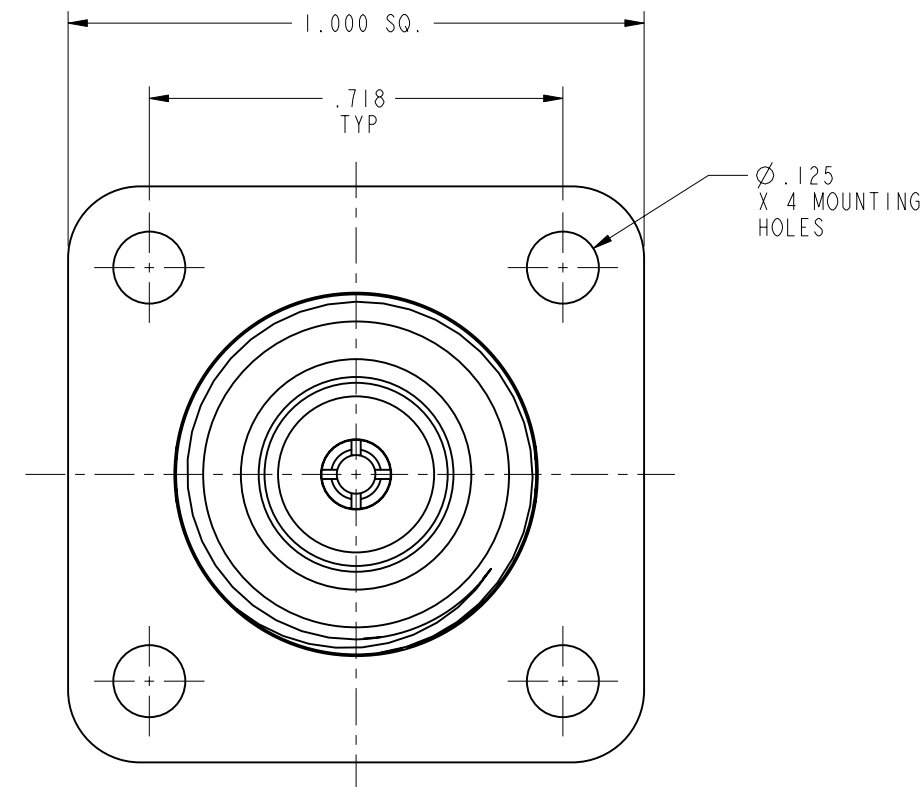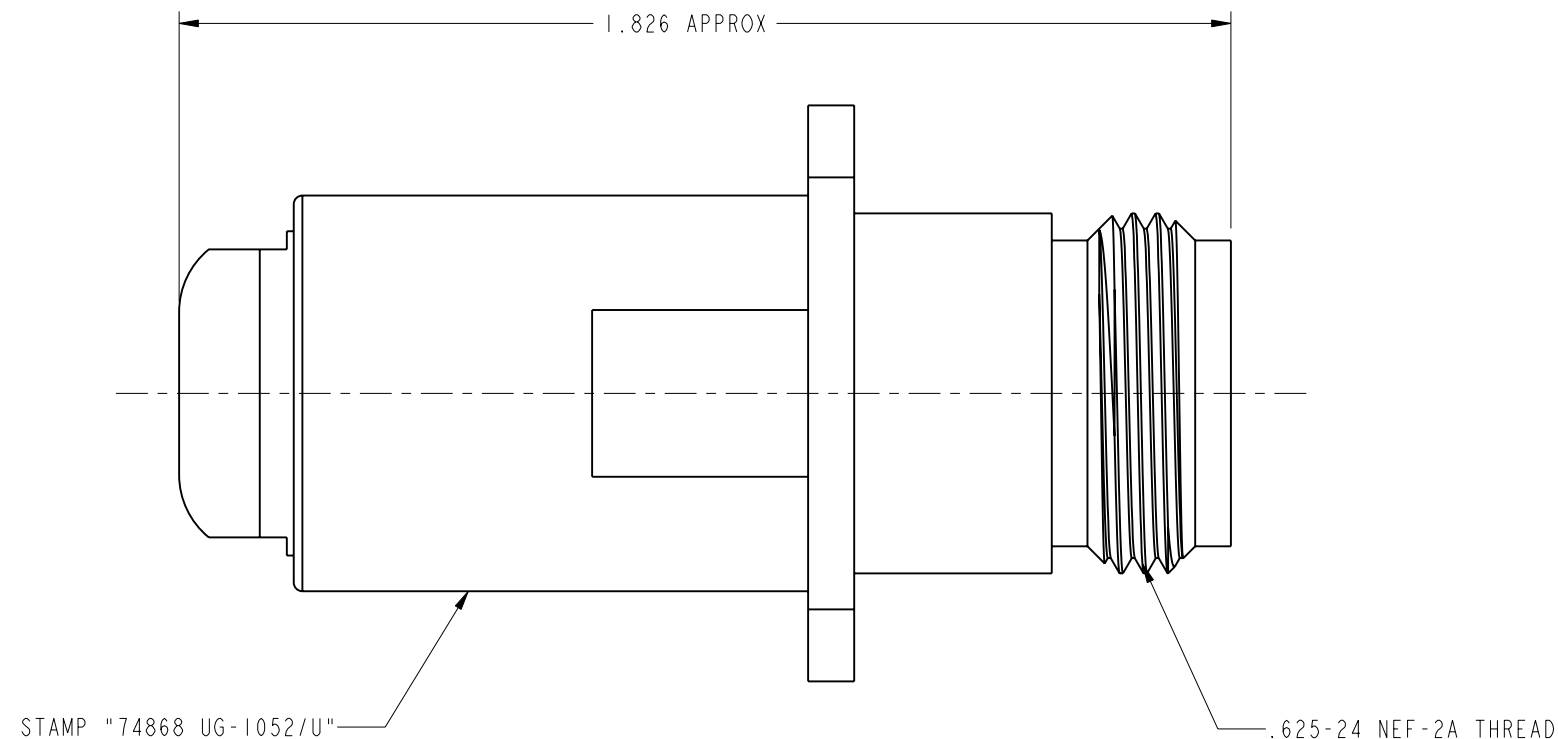

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL		DRAWN C. McGRATH		DATE 13-Nov-06		TITLE IMP N (F) FOR RG-58/U CABLE PANEL MOUNT			Amphenol RF Danbury, CT, USA Tainan, Taiwan Shenzhen, China www.amphenolrf.com			
	REFERENCE		ENGINEER O. BARTHELMES		DATE 13-Nov-06								
			APPROVED B.C. GLEISSNER		DATE 12/4/06								
	CAD FILE I:\N\36000		CODE ID 74868		DWG SIZE B		DRAWING NO. 36000		REV H				
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.													