
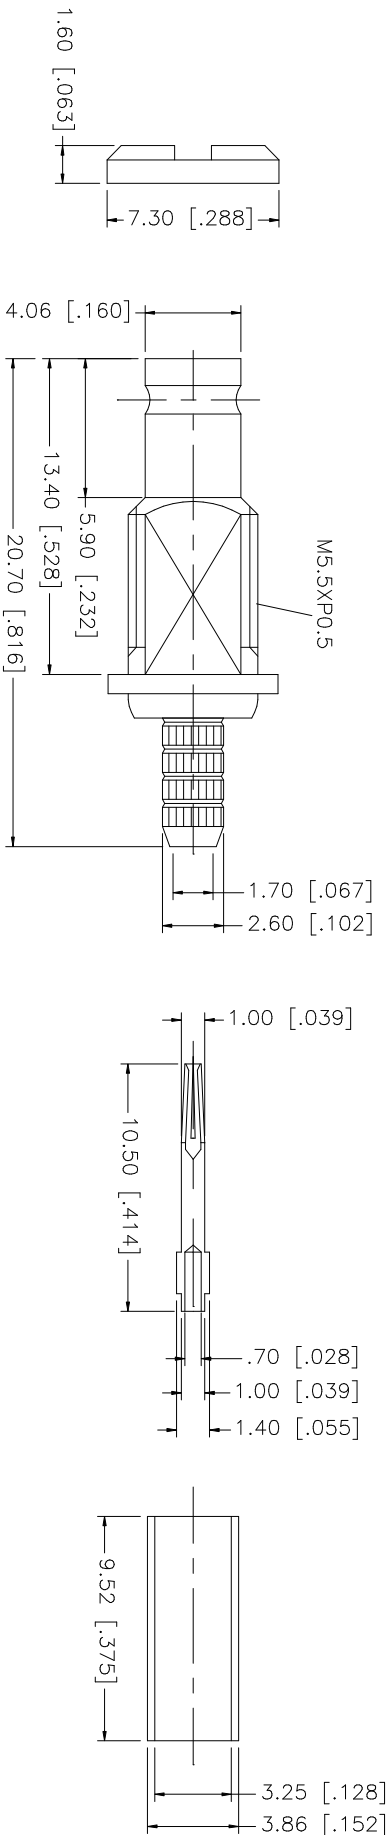


REV.	DATE	DESCRIPTION
A	01/30/04	UPDATE DRAWING FORMAT

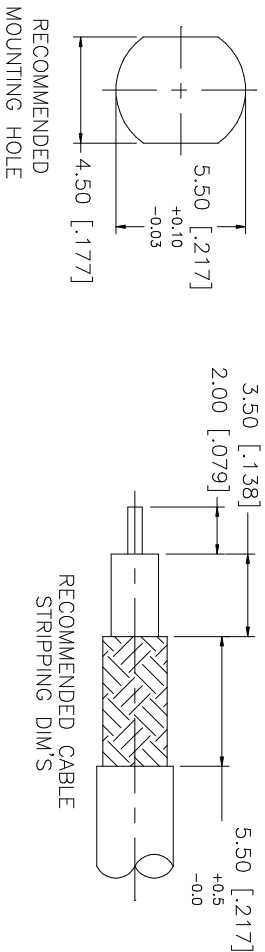

- PANEL THICKNESS
1. 4mm (IF PLUG IS PUSH-PULL)
 2. 2.7mm (IF PLUG IS SCREW IN)

CABLE: L810/22
 RG 179
 KX 3
 KX 22

IMPEDANCE: 50ohm
 WORKING VOLTAGE: 250 V
 OPERATING TEMPERATURE: -40° ~ +125°C/21 DAYS

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.				
8				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	APPROVALS	DATE	Amphenol Connex 1.0/2.3 CRIMP BULKHEAD JACK (FOR 174/U, 188/U, 316/U CABLE)	
7				0.5 - 8mm ± 0.20mm	DRAWN	G.R.S.		
6				8 - 30mm ± 0.40mm	CHECKED			
5	NUT	BRASS	GOLD	30 - 120mm ± 0.50mm	ISSUED			
4	FERRULE	COPPER	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	SHEET	1 OF 1	PART NO.	282102
3	CONTACT PIN	BER. COPPER	GOLD	.020 - .315 = ± 0.007"			DWG. NO.	282102.DWG
2	INSULATOR	PTFE	NATURAL	.315 - 1.180 = ± 0.015"			REV	A
1	BODY	BRASS	GOLD	1.180 - 4.724 = ± 0.020"			SIZE	A
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	SCALE	NA