


REV.	DATE	ECR NO.	DESCRIPTION
NC	02/08/07	—	INITIAL RELEASE
A	06/18/08	100033	REVISE BARREL AREA

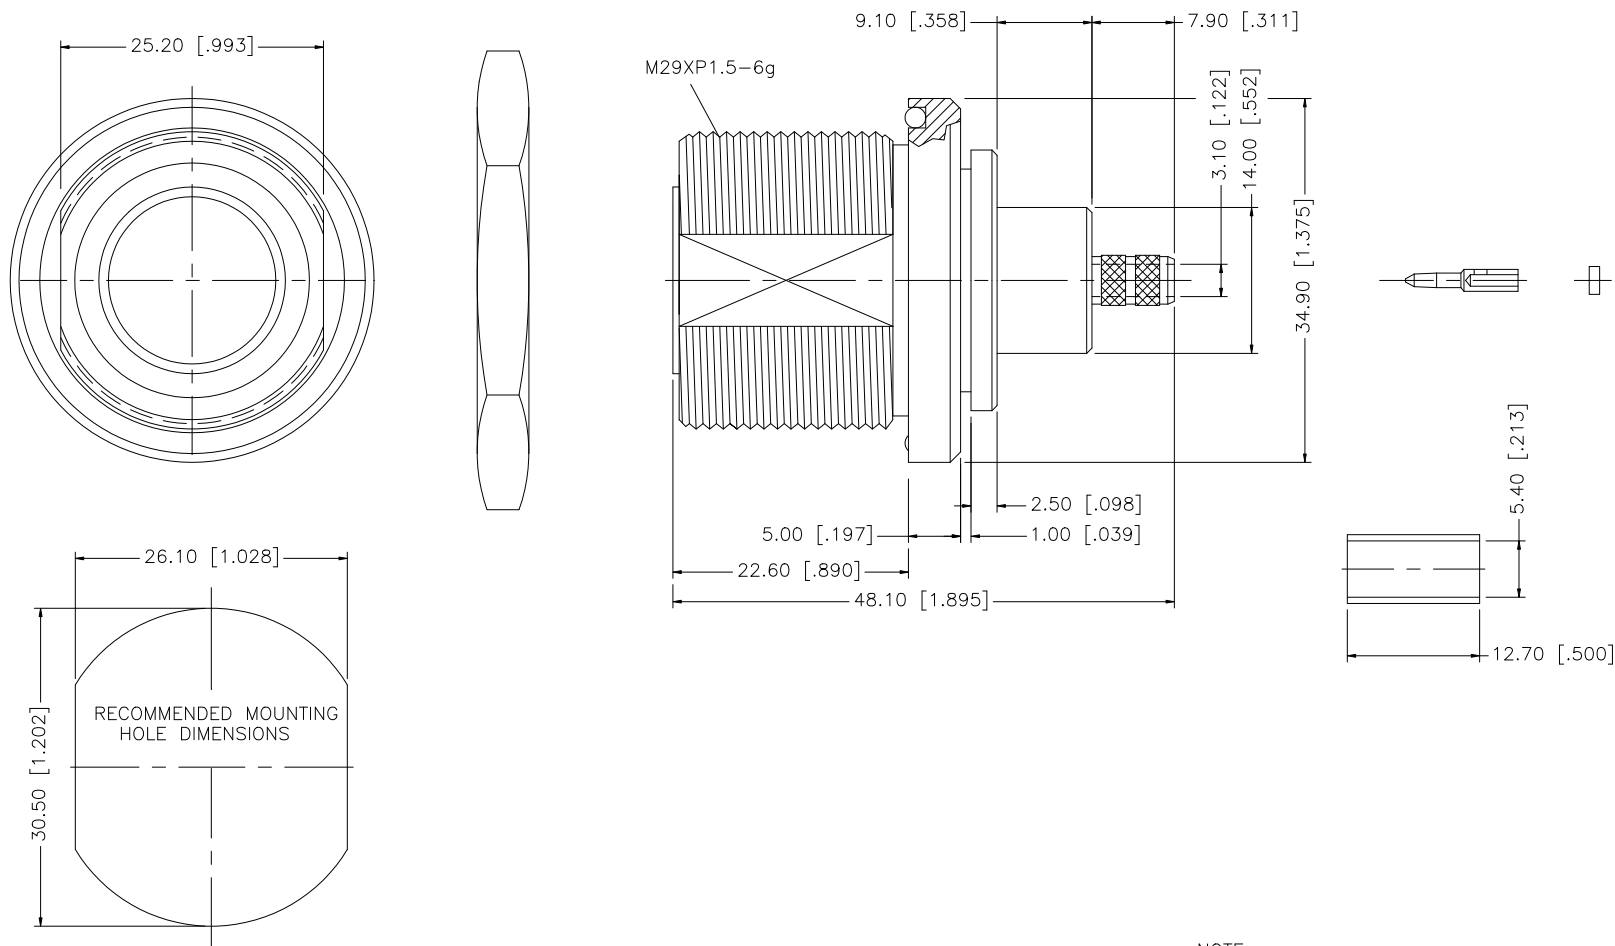

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .213"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.						02/08/07
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED		PART DESCRIPTION 7/16 CRIMP BULKHEAD JACK (FOR LMR195 CABLE)					
5	FERRULE	COPPER	NEXCOTE	1		ISSUED							
4	HEX NUT	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1	PART NO. 272151–10					
3	CONTACT PIN	BER. COPPER	SILVER	1									
2	INSULATOR	TPFE	NATURAL	1		CAD FILE		DWG. NO. 272151–10.DWG			REV. NC	SIZE A	SCALE NA
1	BODY	BRASS	NEXCOTE	1		C:/272/272151–10.DWG							
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING								