

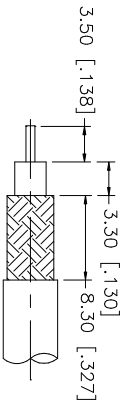


REV.	DATE	DESCRIPTION
A	01/22/04	UPDATE DRAWING FORMAT

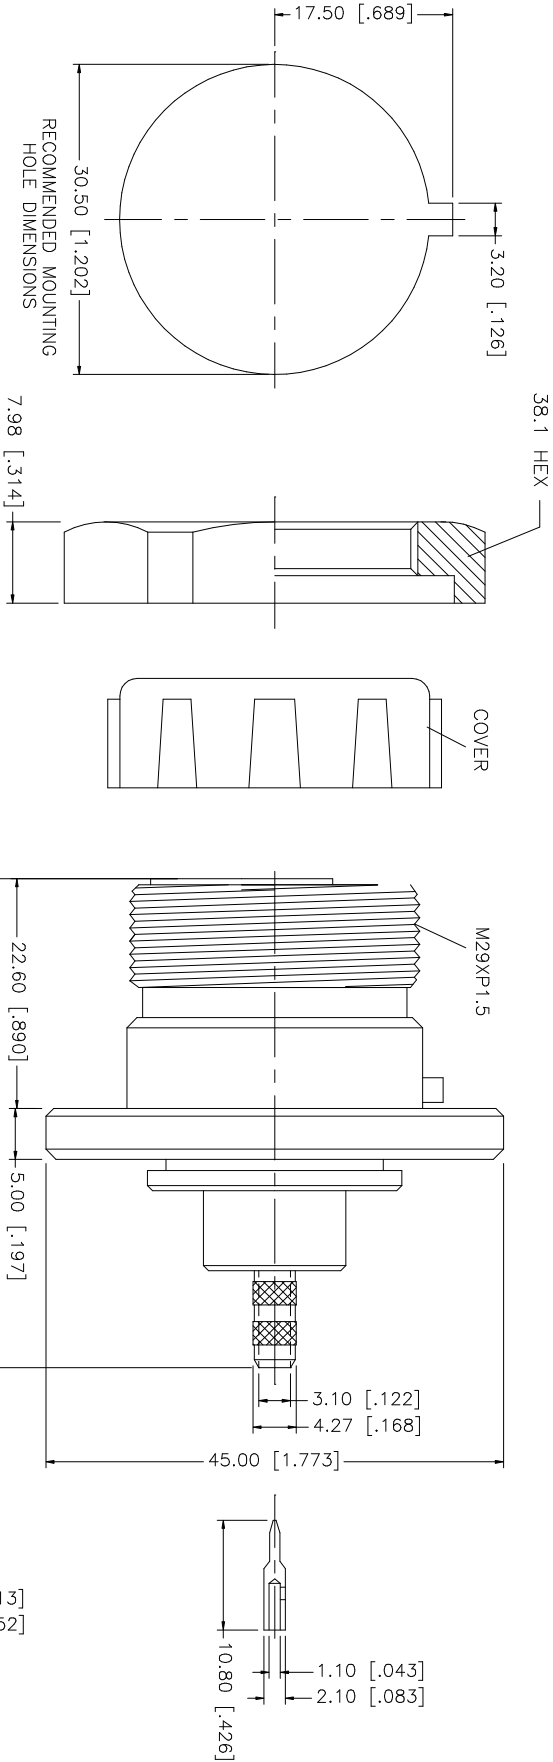

RECOMMENDED
CABLE STRIPPING DIM'S



- NOTE:
1. CRIMPED FERRULE
HEX. CRIMP SIZE .213"
 2. CRIMPED CONTACT PIN
HEX. CRIMP SIZE .068"
- OR CONTACT PIN TO SOLDER

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	CAD FILE C:/272/272151.DWG DWG. NO. 272151.DWG REV. A SIZE A SCALE NA
7				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:			
6	COVER	P.E.	BLUE	0.5 - 8mm ± 0.20mm	CHECKED		
5	FERRULE	COPPER	NEXCOTE	8 - 30mm ± 0.40mm	ISSUED		
4	HEX NUT	BRASS	NEXCOTE	30 - 120mm ± 0.50mm			
3	CONTACT PIN	BER. COPPER	SILVER	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	SHEET	1 OF 1	PART DESCRIPTION 7/16 CRIMP BULKHEAD JACK (FOR RG58/U, 58C/U CABLE) PART NO. 272151
2	INSULATOR	TEFLON	NATURAL	.020 - .315 = ± 0.007"			
1	BODY	BRASS	NEXCOTE	.315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		

Amphenol Connex