
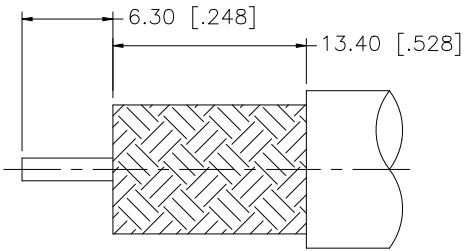
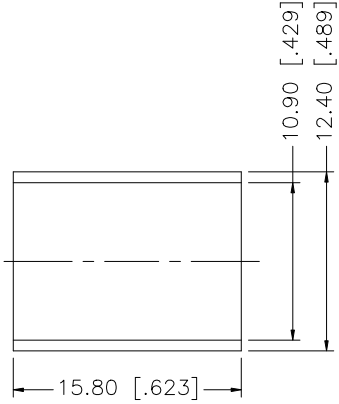


REV.	DATE	DESCRIPTION
NC	01/22/00	INITIAL RELEASE
A	07/16/07	UPDATE DRAWING FORMAT, ADD FLAT TO BODY.

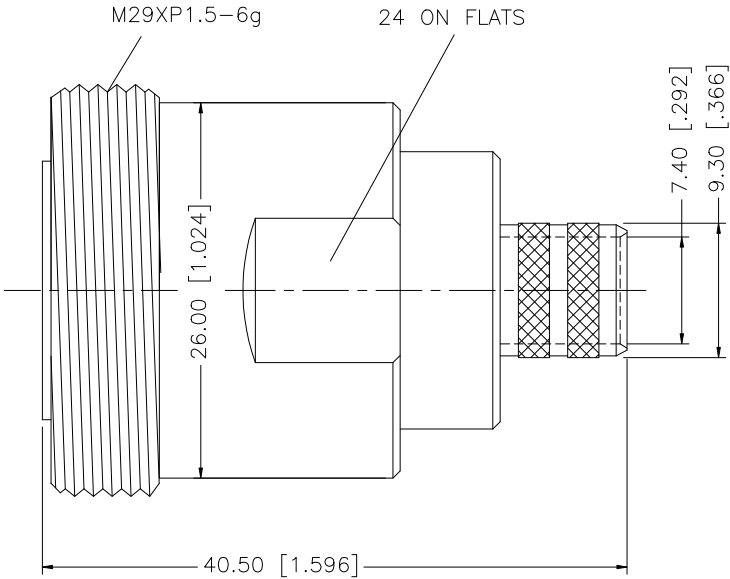

RECOMMENDED CABLE
STRIPPING DIM'S

- NOTES:
- 1. CRIMPED FERRULE HEX CRIMP SIZE .429"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	07/16/07						
7						CHECKED								
6						ISSUED				PART DESCRIPTION 7/16 CRIMP PLUG (LMR400, B9913 CABLE)				
5						SHEET	1 OF 1							
4	FERRULE	COPPER	NEXCOTE	1						PART NO. 272144				
3	CONTACT PIN	BRASS	SILVER	1										
2	INSULATOR	TEFLON	NATURAL	1						DWG. NO. 272144.DWG				
1	BODY	BRASS	NEXCOTE	1										
DESCRIPTION MATERIAL FINISH QTY					CAD FILE C:/272/272144.DWG					REV. A SIZE A SCALE NA				