
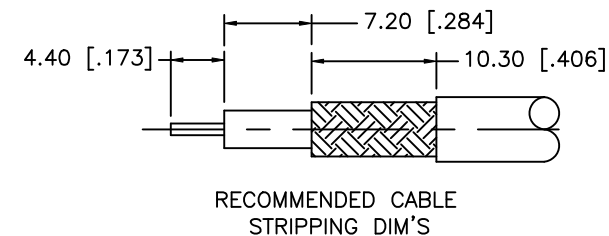
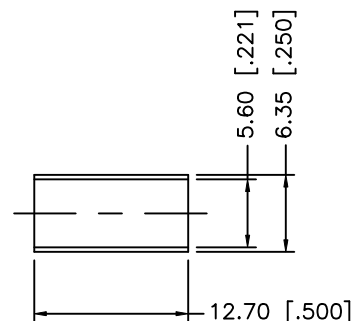


REV.	DATE	ECR NO.	DESCRIPTION
A	12/29/00	—	REVISE PLATING TO SILVER
B	07/30/06	—	REVISE PLATING TO NEXCOTE, UPDATE DRAWING FORMAT
C	07/27/08	—	REVISE MATING FACE TO 32 HEX NUT, FERRULE I.D.

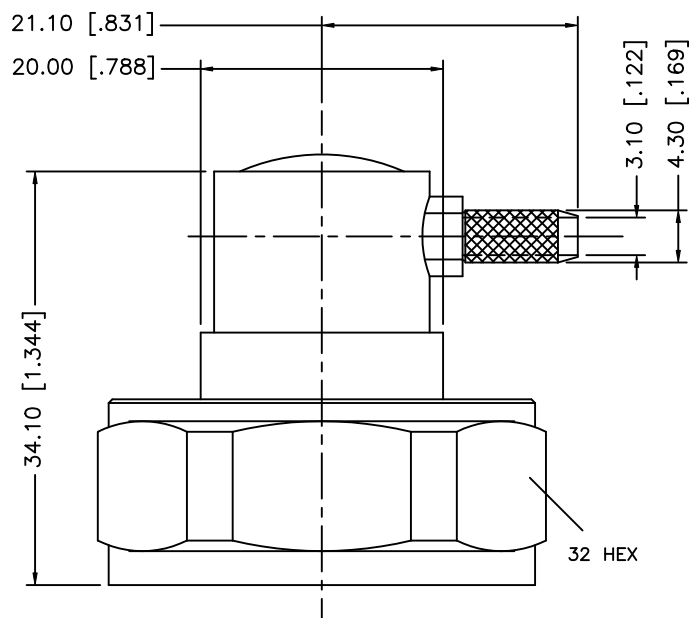

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8					DRAWN	GRS	07/27/08										
7					CHECKED												
6	FERRULE	BRASS	NEXCOTE		1	ISSUED				PART DESCRIPTION 7/16 R/A CRIMP PLUG (FOR RG-142, 213, 400 CABLE)							
5	COVER	BRASS	NEXCOTE		1	SHEET	1 OF 1										
4	GASKET	SILICONE	BLACK		1												
3	CONTACT PIN	BER. COPPER	SILVER		1				PART NO. 272112								
2	INSULATOR	PTFE	NATURAL		1												
1	BODY	BRASS	NEXCOTE		1												
DESCRIPTION					MATERIAL	FINISH	QTY	CAD FILE C:/272/272112.DWG		DWG. NO.		272112.DWG	REV.	C	SIZE	A	SCALE