






REV.	DATE	ECR NO.	DESCRIPTION
NC	04/20/09	XXXXXX	INITIAL RELEASE

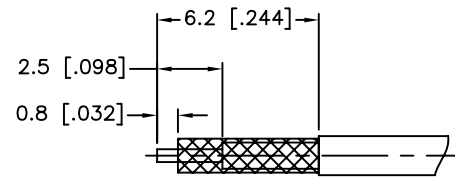

RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
MOUNTING HOLE

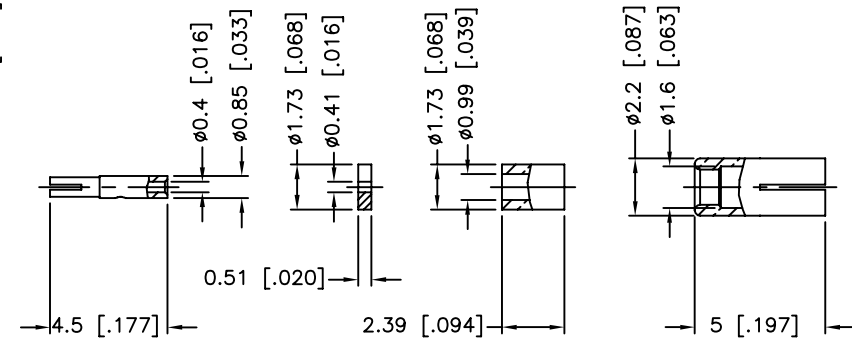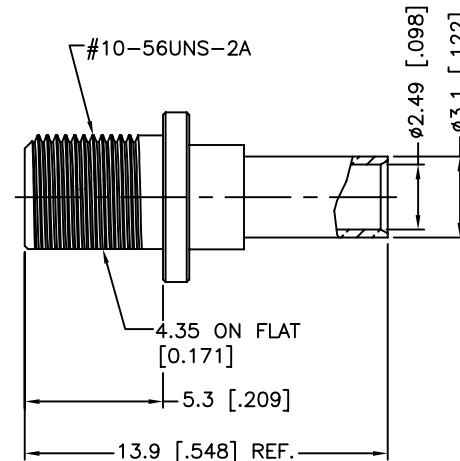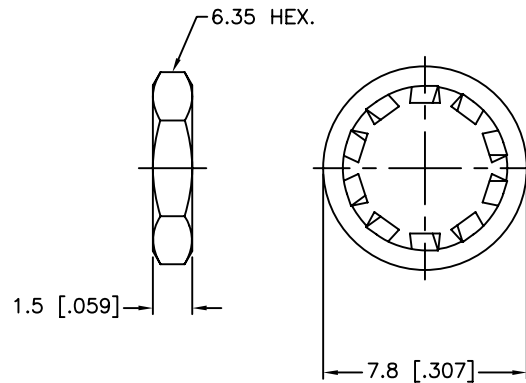

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
2. CONTACT PIN TO SOLDER
3. MAX.PANEL THICKNESS=2mm

9	INNER FERRULE	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
8	SLEEVE	BRASS	GOLD	1		DRAWN	M.ZHANG						04/20/09
7	INSULATOR	PTFE	NATURAL	1		CHECKED							
6	HEX NUT	BRASS	GOLD	1		ISSUED			PART DESCRIPTION MMCX BULKHEAD CRIMP JACK (FOR 1.37mm CABLE)				
5	LOCK WASHER	BRASS	GOLD	1		SHEET	1 OF 1						
4	CONTACT PIN	BER. COPPER	GOLD	1					PART NO. 262148				
3	BARREL	BRASS	GOLD	1									
2	INSULATOR	PTFE	NATURAL	1				DWG. NO. 262148.DWG					
1	BODY	BRASS	GOLD	1									
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE C:/CONNEX/262148.DWG			REV.	NC	SIZE	A	SCALE	NA