



REV.	DATE	ECR NO.	DESCRIPTION
NC	04/20/09	XXXXXX	INITIAL RELEASE
A	12/09/13	2671	CHANGE SPACER I.D., UPDATE DRAWING FORMAT

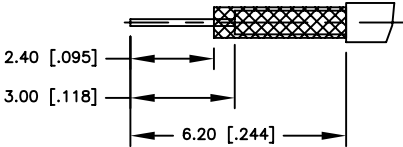

RECOMMENDED
CABLE STRIPPING DIM'S

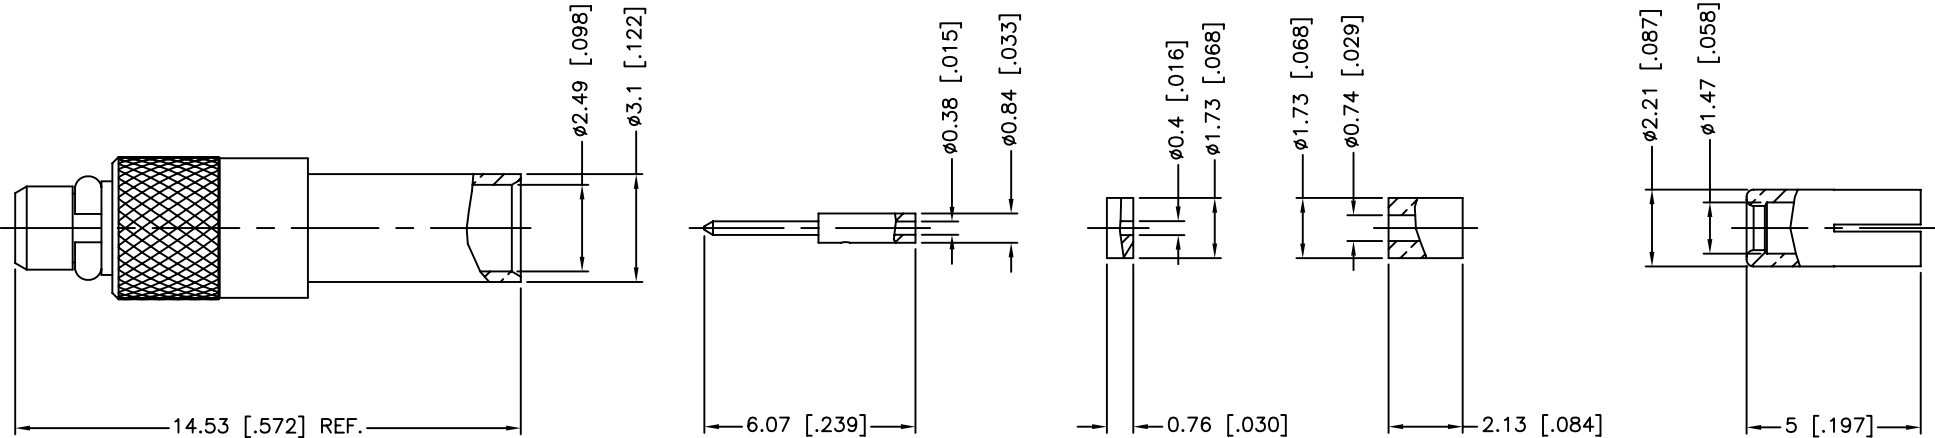

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: 0–6 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 200 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: –40°C TO +80°C
6. CRIMPED FERRULE
HEX. CRIMP SIZE .105"
7. CONTACT PIN CAN BE SOLDERED
OR USE 4-WAY INDENT TOOL #47025

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 ± 0.05mm 0.5 – 6mm ± 0.10mm 6 – 30mm ± 0.20mm 30 – 120mm ± 0.30mm ANGLES ± 1° UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: <.020 ± 0.002" .020 – .236 ± 0.004" .236 – 1.180 ± 0.007" 1.180 – 4.724 ± 0.012" ANGLES ± 1°		APPROVALS		DATE		Amphenol Connex								
8	INNER FERRULE	BRASS	GOLD	1		DRAWN	M.ZHANG	12/09/13											
7	SLEEVE	BRASS	GOLD	1		CHECKED				PART DESCRIPTION MMCX CRIMP PLUG (FOR 1.32mm CABLE)									
6	INSULATOR	PTFE	NATURAL	1		ISSUED													
5	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1			PART NO. 262143									
4	SPRING RING	BER. COPPER	GOLD	1		CAD FILE	C:/CONNEX/262143.DWG												
3	BARREL	BRASS	GOLD	1															
2	INSULATOR	PTFE	NATURAL	1															
1	BODY	BRASS	GOLD	1															
DESCRIPTION					DO NOT SCALE DRAWING														
MATERIAL					C:/CONNEX/262143.DWG					DWG. NO.		262143.DWG		REV.	A	SIZE	A	SCALE	NA
FINISH																			
QTY																			