

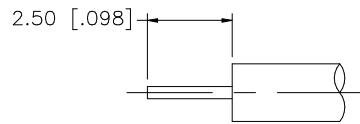
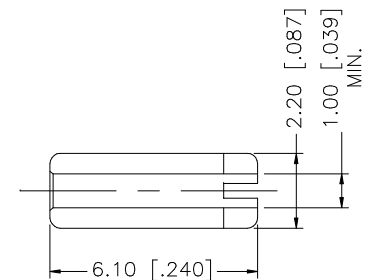



REV.	DATE	DESCRIPTION
NC	01/28/03	INITIAL RELEASE



RECOMMENDED CABLE
STRIPPING DIM'S.

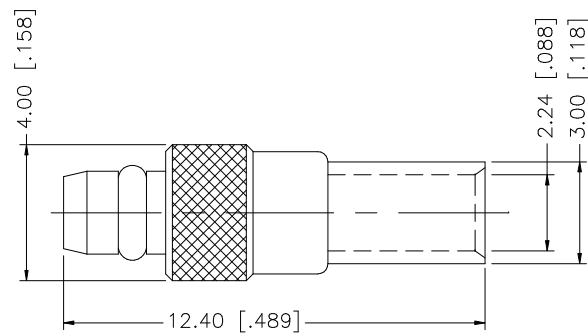

NOTE:

1. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	G.R.S.	01/28/03										
7						CHECKED												
6						ISSUED			PART DESCRIPTION									
5	SOLDER BARREL	BRASS	GOLD	1		MMCX STRAIGHT DIRECT SOLDER PLUG (FOR .034.” SEMI-RIGID CABLE)												
4	INSULATOR	TEFLON	NATURAL	1														
3	CONTACT PIN	BER. COPPER	GOLD	1														
2	INSULATOR	TEFLON	NATURAL	1		SHEET		1 OF 1		PART NO.								
1	BODY	BRASS	GOLD	1					262134									
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE		C:/262/262134.DWG		DWG. NO.		262134.DWG		REV.	NC	SIZE	A	SCALE	NA