


REV.	DATE	ECR NO.	DESCRIPTION
NC	10/20/09	XXXXXX	INITIAL RELEASE

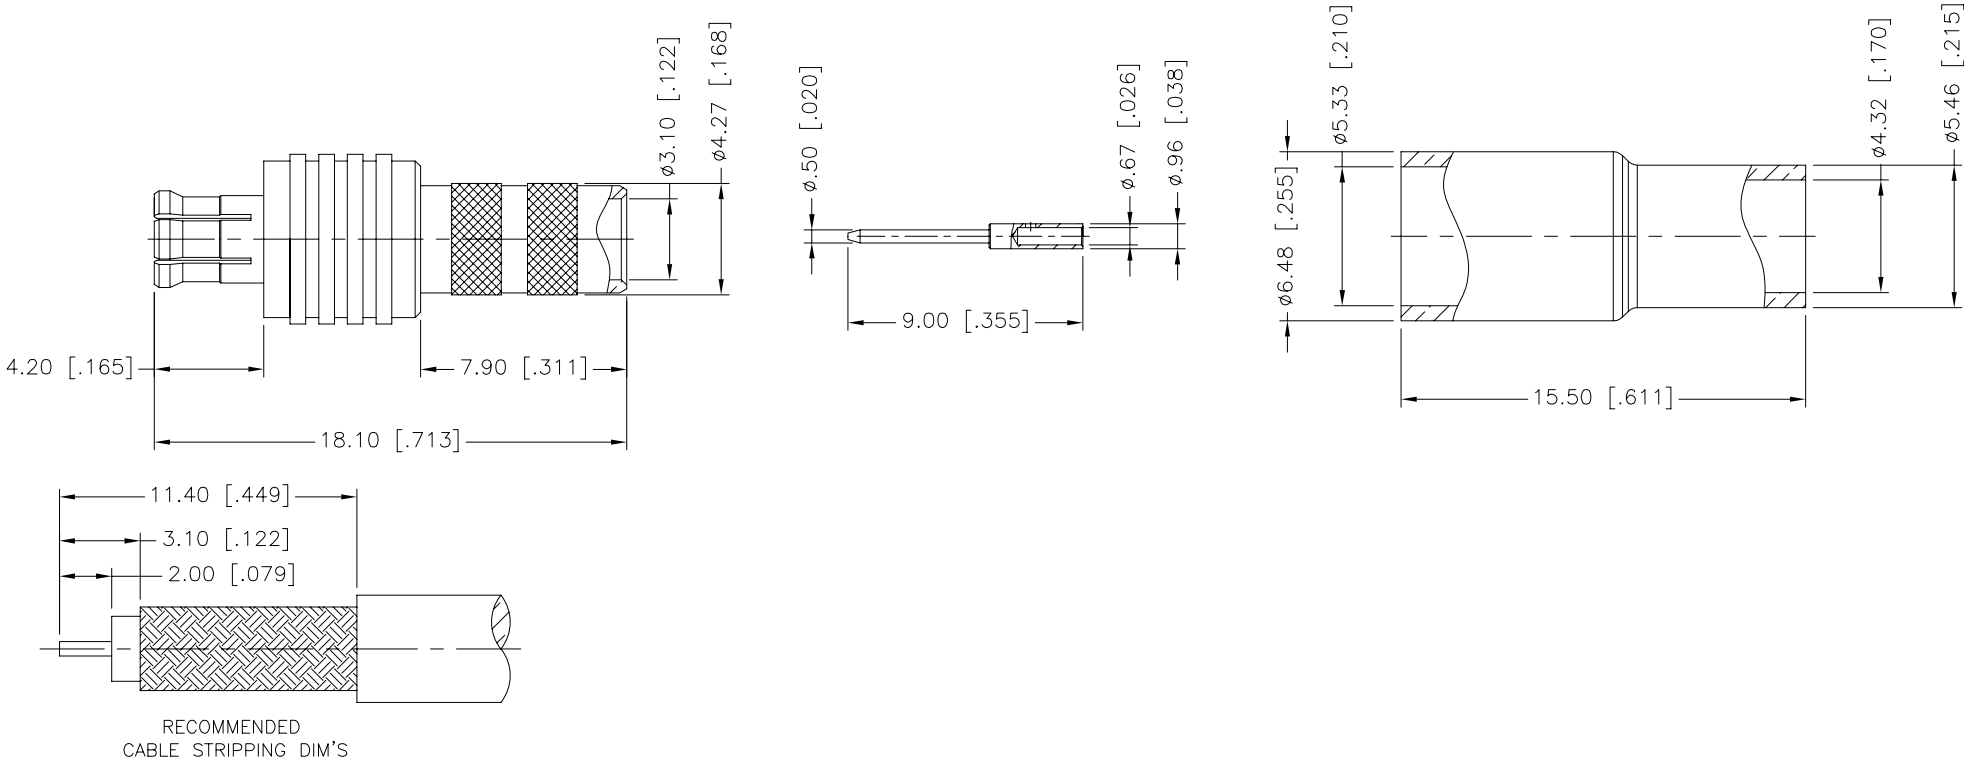

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
 2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex									
						DRAWN	J.CHENG		10/20/09										
						CHECKED													
						ISSUED				PART DESCRIPTION MCX CRIMP PLUG (FOR BELDEN 1855A CABLE)									
						SHEET		1 OF 1											
										PART NO.									
										252209-75									
										DWG. NO.		252209-75.DWG		REV.	NC	SIZE	A	SCALE	NA
										CAD FILE					C:/CONNEX/252209-75.DWG				
5	FERRULE	COPPER	GOLD	1															
4	CONTACT PIN	BRASS	GOLD	1															
3	INSULATOR	PTFE	NATURAL	1															
2	BODY	BERYLLIUM COPPER	GOLD	1															
1	HOUSING	BRASS	GOLD	1															
DESCRIPTION					MATERIAL					FINISH					QTY				