



REV.	DATE	ECR NO.	DESCRIPTION
NC	06/01/09	XXXXXX	INITIAL RELEASE

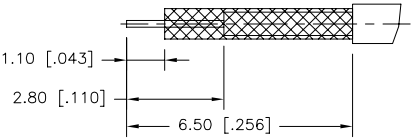

RECOMMENDED
CABLE STRIPPING DIM'S

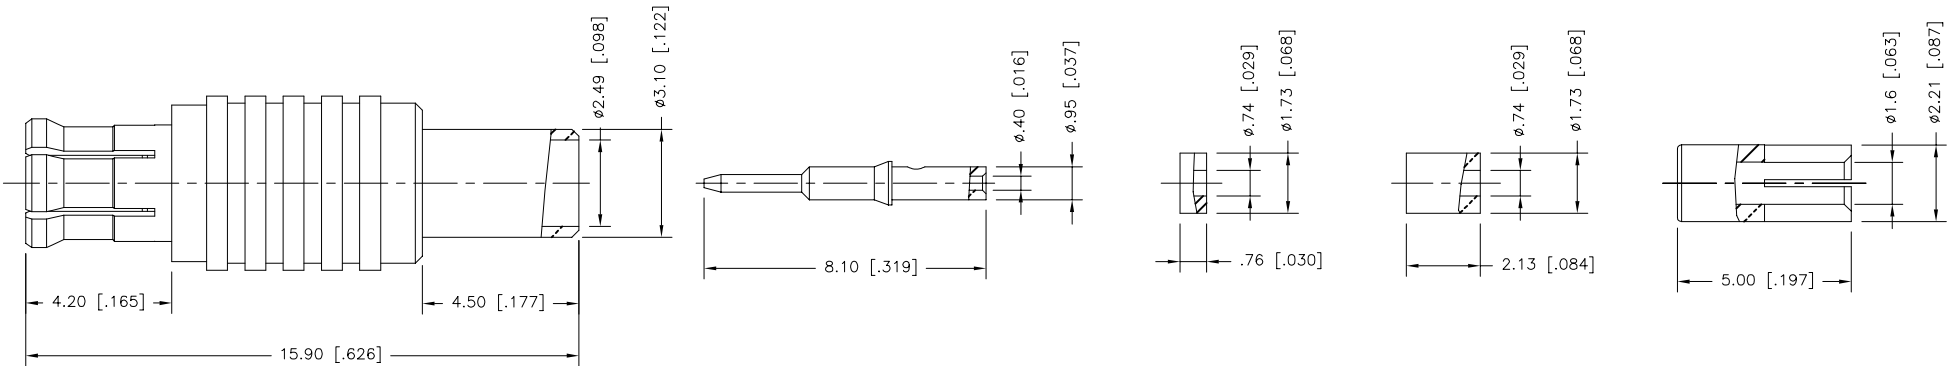

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
 2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7 mm

8	INNER FERRULE	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
7	SLEEVE	BRASS	GOLD	1		DRAWN	J.CHENG						06/01/09	
6	INSULATOR	PTFE	NATURAL	1		CHECKED								
5	CONTACT	BRASS	GOLD	1		ISSUED		PART DESCRIPTION						
4	HOUSING	BRASS	GOLD	1		SHEET	1 OF 1	MCX CRIMP PLUG (FOR 1.37 MM CABLE)						
3	INSULATOR	PTFE	NATURAL	1		PART NO.								
2	INSULATOR	PTFE	NATURAL	1		252201								
1	BODY	BRASS	GOLD	1		DWG. NO.								
	DESCRIPTION	MATERIAL	FINISH	QTY	C:/CONNEX/252201.DWG			252201.DWG	REV.	NC	SIZE	A	SCALE	NA