
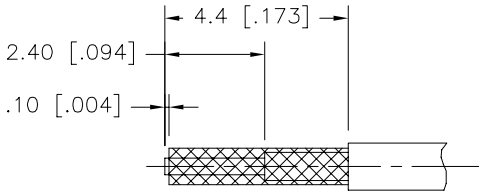
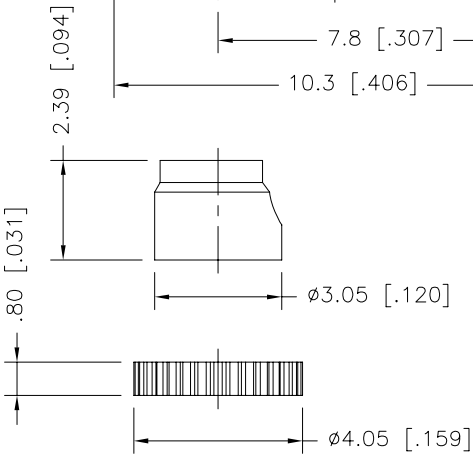
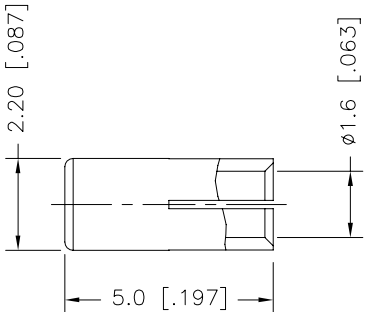
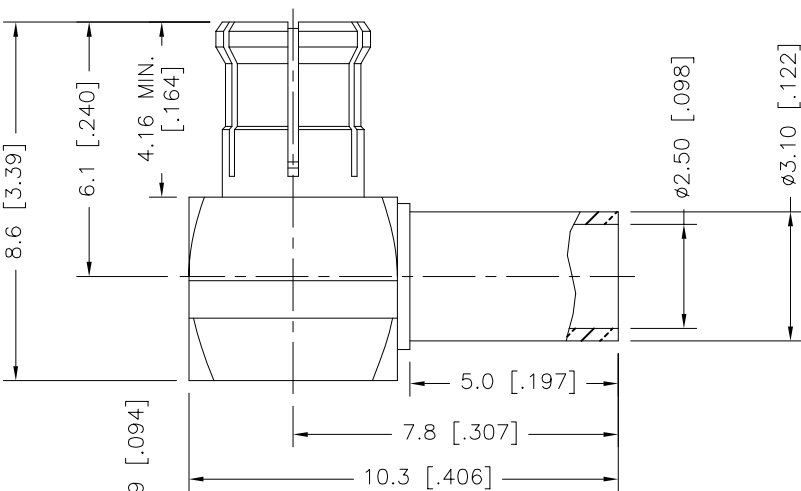


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/01/09	XXXXXX	INITIAL RELEASE

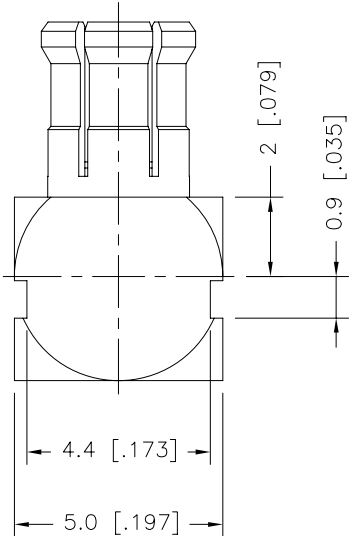

RECOMMENDED
CABLE STRIPPING DIM'S

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
7	INNER FERRULE	BRASS	GOLD	1		DRAWN J.CHENG		06/01/09						
6	COVER	BRASS	GOLD	1		CHECKED								
5	INSULATOR	DELIRIN	NATURAL	1		ISSUED				PART DESCRIPTION MCX R/A CRIMP PLUG (FOR 1.37MM CABLE)				
4	CONTACT PIN	BRASS	GOLD	1		SHEET 1 OF 1								
3	INSULATOR	PTFE	NATURAL	1						PART NO. 252202				
2	BODY	BERYLLIUM COPPER	GOLD	1										
1	HOUSING	BRASS	GOLD	1						DWG. NO. 252202.DWG REV. NC SIZE A SCALE NA				
DESCRIPTION		MATERIAL	FINISH	QTY				CAD FILE C:/CONNEX/252202.DWG						