


REV.	DATE	DESCRIPTION
NC	09/03/07	INITIAL RELEASE

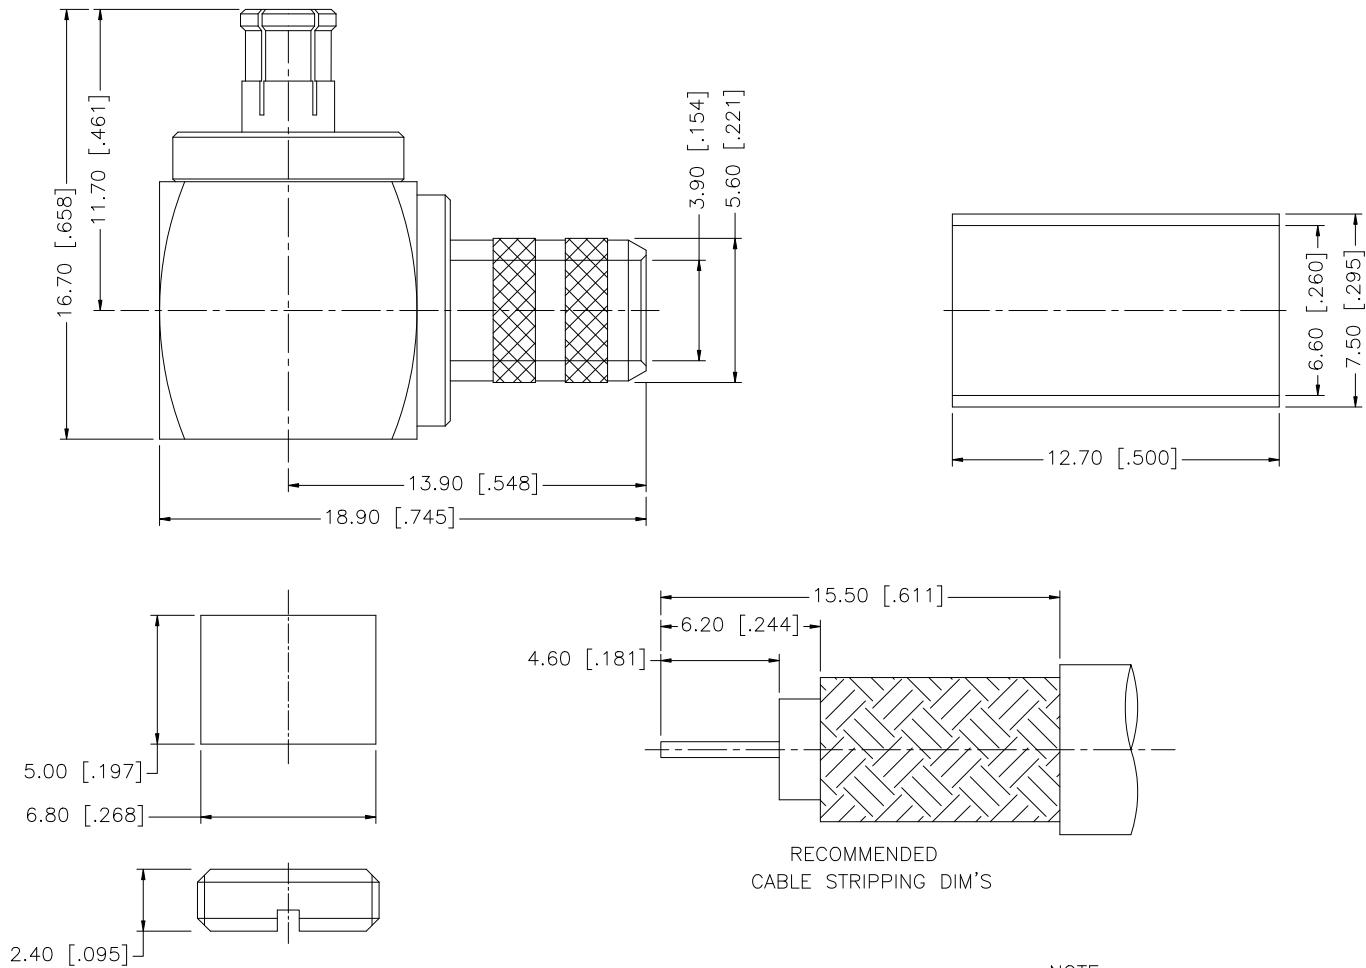

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex				
7						DRAWN	G.R.S.	09/03/07						
6	FERRULE	COPPER	GOLD	1		CHECKED			PART DESCRIPTION MCX R/A CRIMP PLUG (FOR RG-59/U CABLE)					
5	COVER	BRASS	GOLD	1		ISSUED								
4	INSULATOR	DELTRIN	NATURAL	1		SHEET	1 OF 1		PART NO. 252195-75					
3	CONTACT PIN	BRASS	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1				DWG. NO. 252195-75.DWG						
1	BODY	BRASS	GOLD	1										
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		C:/252/252195-75.DWG		REV. NC		SIZE A	SCALE NA		