





REV.	DATE	ECR NO.	DESCRIPTION
NC	07/27/09	XXXXXX	INITIAL RELEASE

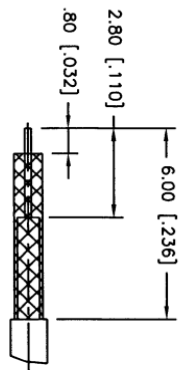

RECOMMENDED
CABLE STRIPPING DIM'S

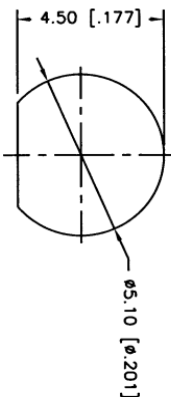

RECOMMENDED
MOUNTING HOLE

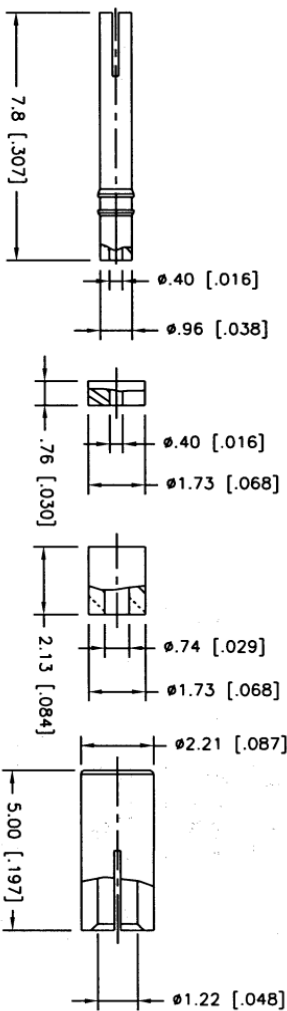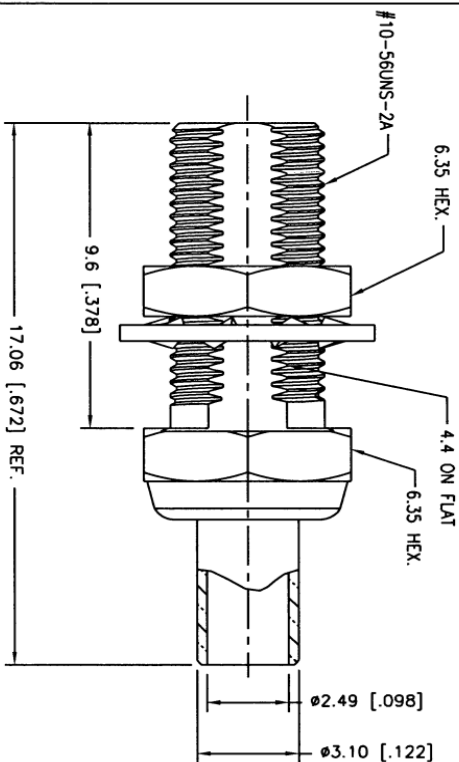

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
SOLDER CENTER CONTACT
2. MAX. PANEL THICKNESS=6.8mm

10	NUT HEX	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 10mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007* .315 - 1.180 = ± 0.015* 1.180 - 4.724 = ± 0.020*	DO NOT SCALE DRAWING	CAD FILE		PART DESCRIPTION	252197	252197.DWG	REV	NC	SIZE	A	SCALE	NA		
9	LOCK WASHER	BRASS	GOLD	1			APPROVALS											DATE	
8	INNER FERRULE	BRASS	GOLD	1			DRAWN	M.ZHANG										07/27/09	
7	SLEEVE	BRASS	GOLD	1			CHECKED												
6	INSULATOR	PTFE	NATURAL	1			ISSUED												
5	CONTACT PIN	BERYLLIUM COPPER	GOLD	1			SHEET	1 OF 1											
4	BARREL	BRASS	GOLD	1															
3	INSULATOR	PTFE	NATURAL	1															
2	INSULATOR	PTFE	NATURAL	1															
1	BODY	BRASS	GOLD	1															
DESCRIPTION					MATERIAL					FINISH					QTY				
2. MAX. PANEL THICKNESS=6.8mm																			
Amphenol Connex																			
MCX BULKHEAD CRIMP JACK (FOR 1.13 MM CABLE)																			