


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/01/09	XXXXXX	INITIAL RELEASE

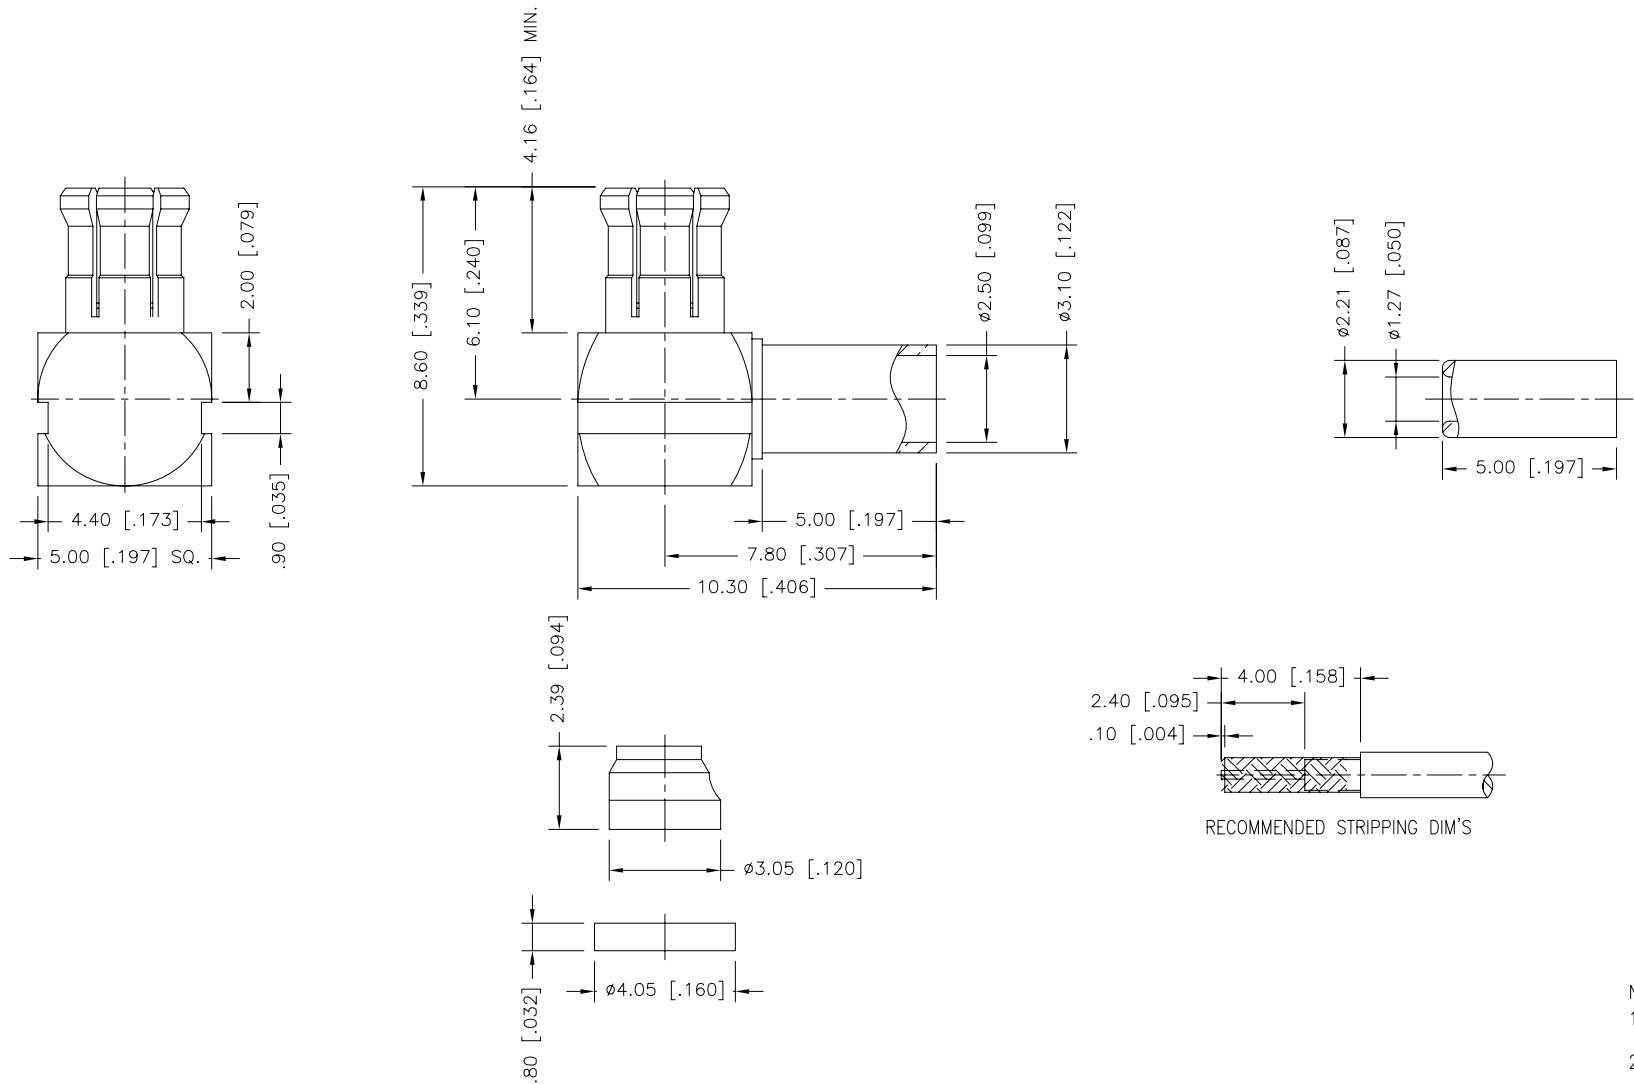

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
 2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex				
7	INNER FERRULE	BRASS	GOLD	1		DRAWN	J.CHENG	06/01/09						
6	COVER	BRASS	GOLD	1		CHECKED			PART DESCRIPTION					
5	INSULATOR	DELIRIN	NATURAL	1		ISSUED			MCX R/A CRIMP PLUG (FOR 1.32 CABLE)					
4	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1				PART NO.			
3	INSULATOR	PTFE	NATURAL	1					252199					
2	BODY	BERYLLIUM COPPER	GOLD	1										
1	HOUSING	BRASS	GOLD	1										