
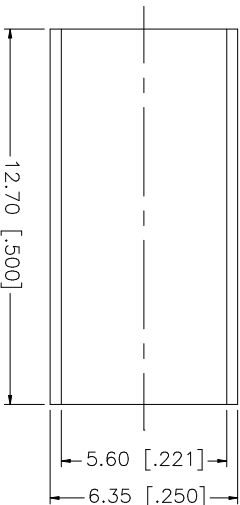
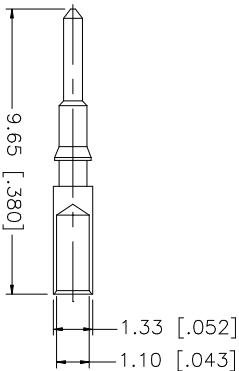
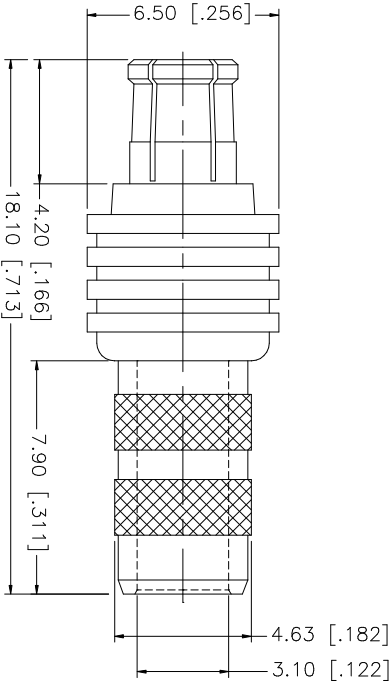


REV.	DATE	DESCRIPTION
NC	01/27/03	INITIAL RELEASE

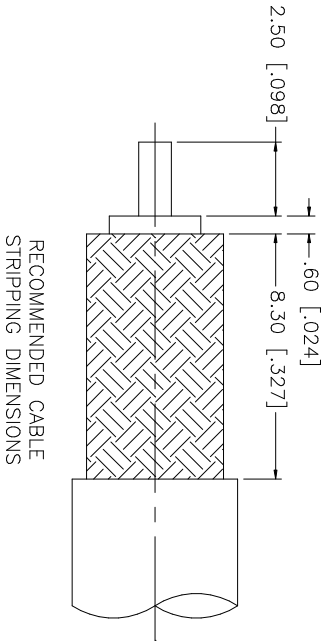

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE .043"

8					UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN INCHES ARE FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	PART DESCRIPTION MCX CRIMP PLUG (FOR RG-58A/U, 58C/U CABLE)
7					UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN	01/27/03	
6					UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	CHECKED		
5						ISSUED		
4	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1	
3	CONTACT PIN	BRASS	GOLD	1				PART NO.
2	INSULATOR	TEFLON	NATURAL	1				252181
1	BODY	BER. COPPER	NICKEL	1				
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/252/252181.DWG	DWG. NO.
								252181.DWG
						REV	NC	SIZE
								A
								SCALE
								NA

Amphenol Connex