

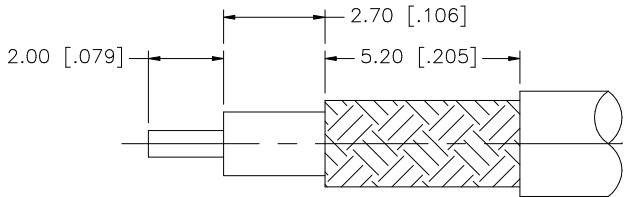
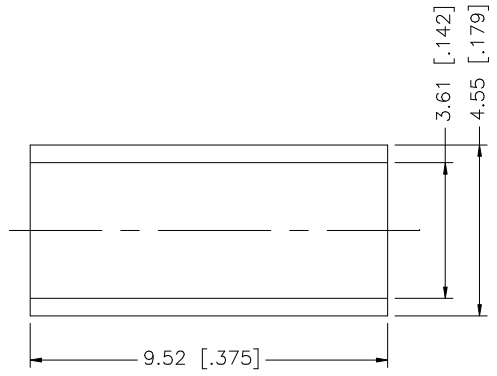


REV.	DATE	DESCRIPTION
NC	05/22/06	INITIAL RELEASE



RECOMMENDED CABLE
STRIPPING DIMENSIONS

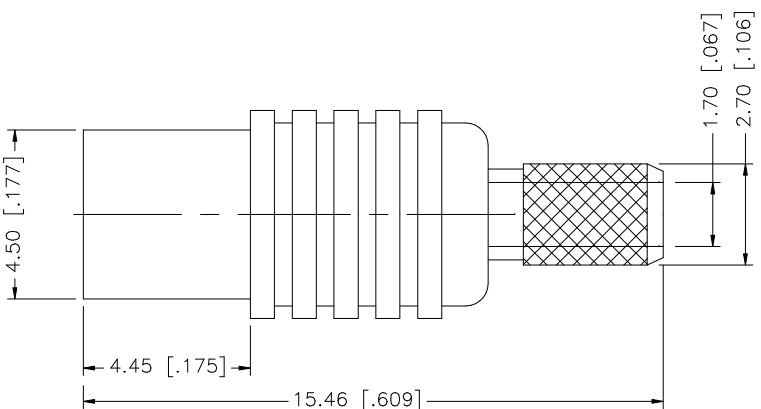

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS		DATE		Amphenol Connex				
7						DRAWN	G.R.S.	05/22/06						
6						CHECKED				PART DESCRIPTION MCX CRIMP JACK – 75ohm (FOR RG-179/U DOUBLE BRAID CABLE)				
5						ISSUED								
4	FERRULE	COPPER	GOLD	1		SHEET	1 OF 1							
3	CONTACT PIN	BER. COPPER	GOLD	1	DO NOT SCALE DRAWING	PART NO. 252165-75								
2	INSULATOR	TEFLON	NATURAL	1		DWG. NO. 252165-75.DWG								
1	BODY	BRASS	GOLD	1		REV. NC								
DESCRIPTION MATERIAL FINISH QTY						CAD FILE	C:/252/252165-75.DWG				SIZE A	SCALE NA		