






REV.	DATE	DESCRIPTION
NC	01/07/08	INITIAL RELEASE

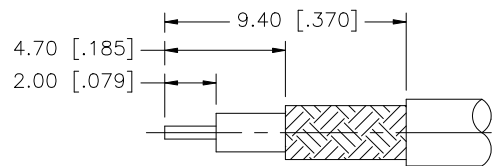

RECOMMENDED CABLE
STRIPPING DIMENSIONS

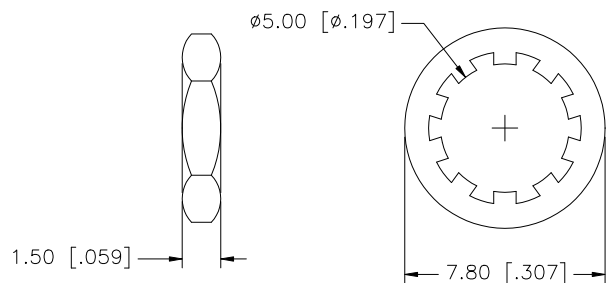

RECOMMENDED
MOUNTING HOLE

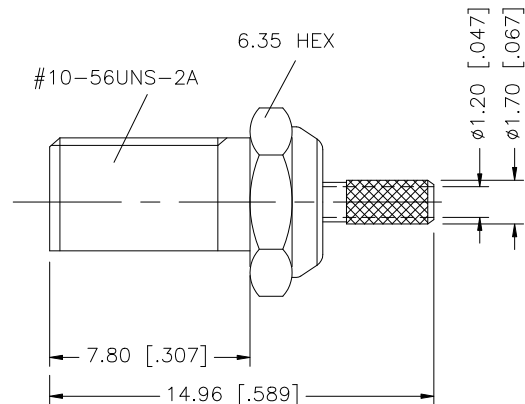

NOTES:

1. CRIMPED FERRULE HEX CRIMP .128"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS = 5.0mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS		DATE		Amphenol Connex						
8						DRAWN	G.R.S.	01/07/08								
7	FERRULE	COPPER	GOLD	1		CHECKED										
6	HEX NUT	BRASS	GOLD	1		ISSUED				PART DESCRIPTION MCX BULKHEAD CRIMP JACK (FOR RG-178B/U, 196A/U CABLE)						
5	LOCK WASHER	BRASS	GOLD	1		SHEET		1 OF 1								
4	GASKET	SILICONE	RED	1							PART NO. 252167-75					
3	CONTACT PIN	PHOS. BRONZE	GOLD	1												
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY	BRASS	GOLD	1												
DESCRIPTION					MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE C:/252/252167-75.DWG		DWG. NO. 252167-75.DWG		REV. NC	SIZE A	SCALE NA