

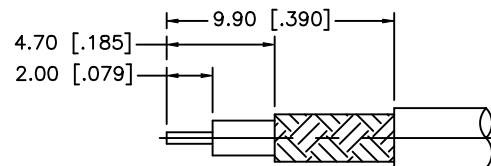
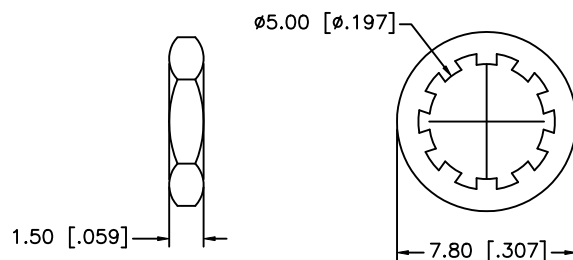
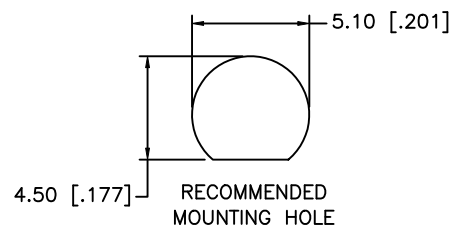



REV.	DATE	ECR NO.	DESCRIPTION
NC	02/31/01	—	INITIAL RELEASE
A	09/15/08	—	UPDATE DRAWING FORMAT/ REVISE BARREL, CONTACT PIN, FERRULE
B	11/08/08	—	REVISE CABLE DESCRIPTION TO "179/U DOUBLE BRAID CABLE"



RECOMMENDED
CABLE STRIPPING DIM'S

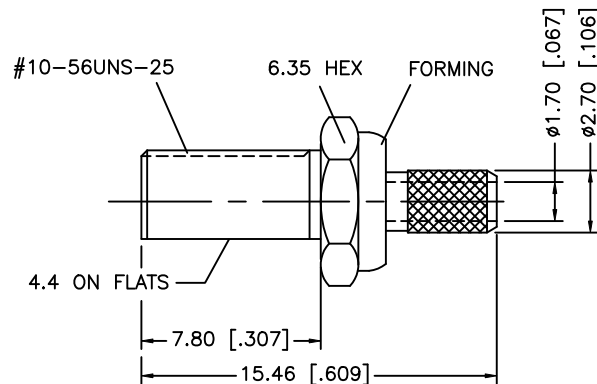

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .151" [3.83]
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS = 6.8mm

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING		APPROVALS		DATE		Amphenol Connex									
8							DRAWN	GRS	11/08/08										
7	FERRULE	COPPER	GOLD			1	CHECKED												
6	HEX NUT	BRASS	GOLD			1	ISSUED												
5	LOCK WASHER	BRASS	GOLD			1	SHEET	1 OF 1				PART DESCRIPTION							
4	CONTACT PIN	BER. COPPER	GOLD			1					MCX BULKHEAD CRIMP JACK – 75 ohms (FOR RG–179/U DOUBLE BRAID CABLE)								
3	BARREL	BRASS	GOLD			1					PART NO.								
2	INSULATOR	PTFE	NATURAL			2					252147–75								
1	BODY	BRASS	GOLD			1							DWG. NO.		252147–75.DWG		REV. A	SIZE A	SCALE NA
DESCRIPTION		MATERIAL	FINISH			QTY			CAD FILE		C:/252/252147–75.DWG								