


REV.	DATE	DESCRIPTION
NC	09/09/07	INITIAL RELEASE

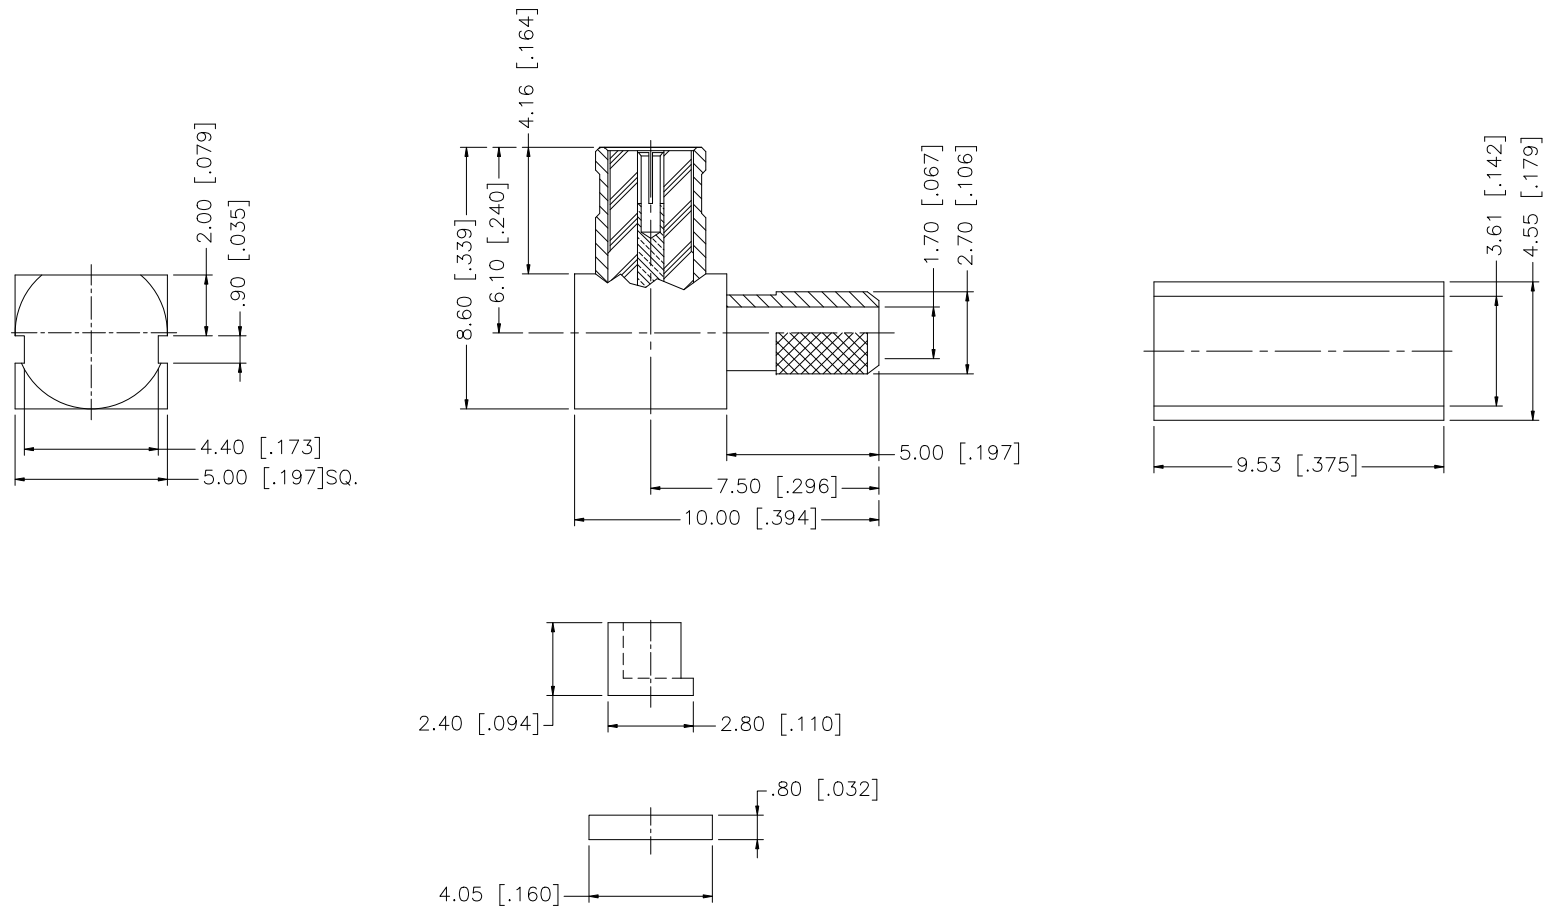

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8					DRAWN		G.R.S.	09/09/07								
7	FERRULE	BRASS	GOLD	1	CHECKED											
6	INSULATOR	DELTRIN	GOLD	1	ISSUED				PART DESCRIPTION							
5	COVER	BRASS	GOLD	1	SHEET		1 OF 1		MCX REVERSE POLARITY R/A CRIMP PLUG (FOR RG–316/U DOUBLE BRAID CABLE)							
4	CONTACT PIN	BER. COPPER	GOLD	1	CAD FILE		C:/252/252119RP.DWG		PART NO.							
3	INSULATOR	TEFLON	NATURAL	1	DWG. NO.		252119RP.DWG		REV.		NC	SIZE	A	SCALE	NA	
2	BODY	BER. COPPER	GOLD	1												
1	HOUSING	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY												