


REV.	DATE	DESCRIPTION
NC	08/25/02	INITIAL RELEASE

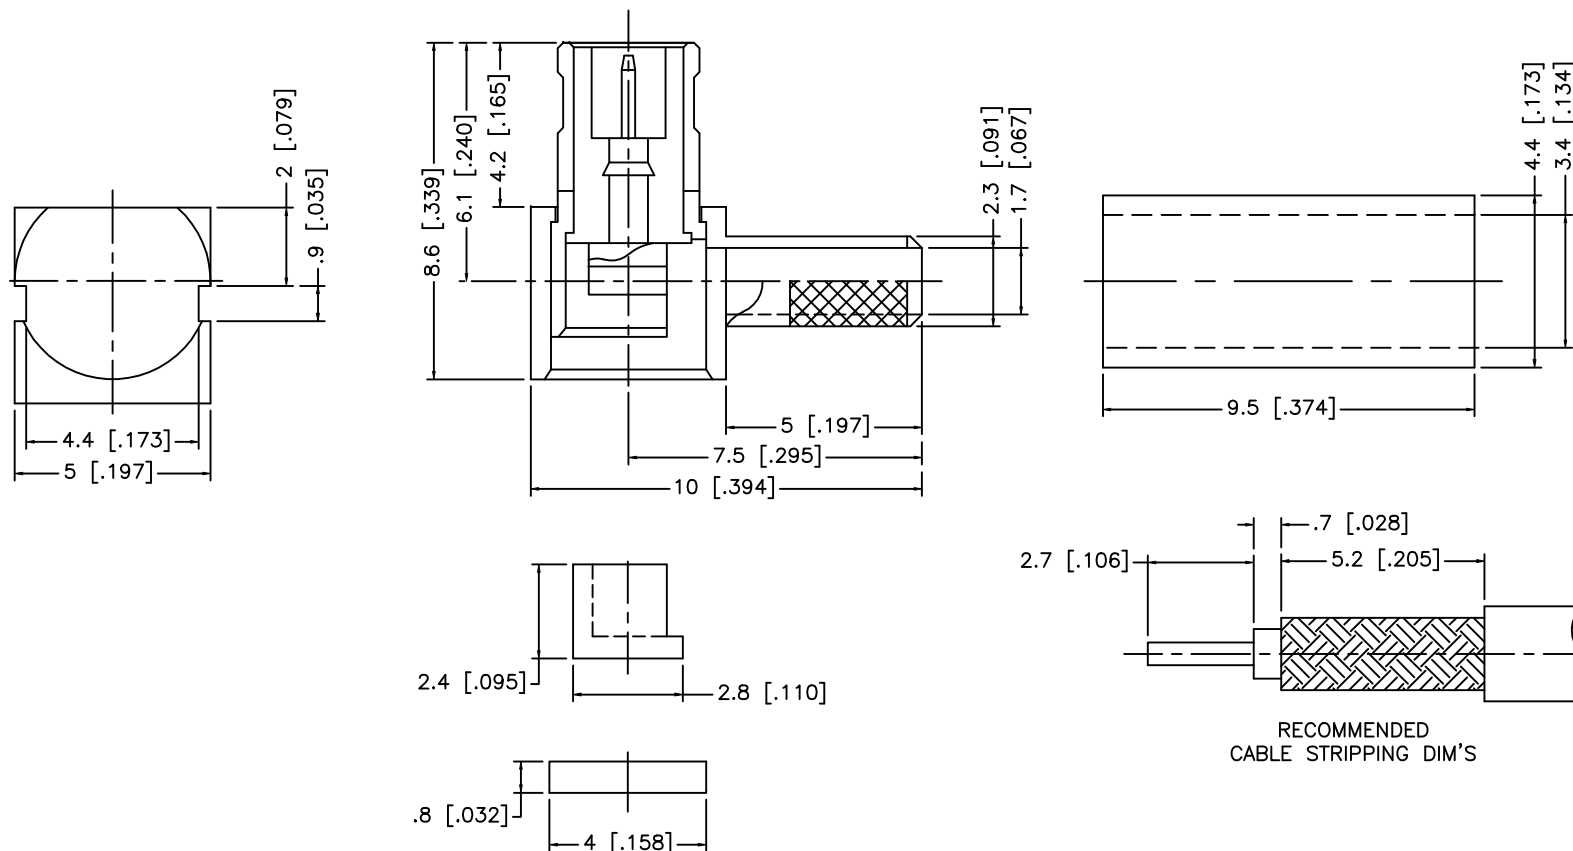

RECOMMENDED  
CABLE STRIPPING DIM'S

NOTE:  
USE .151 HEX CRIMP DIE TO  
TERMINATE FERRULE TO CABLE.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	<div>Amphenol - Connex</div> <div>CONNECTOR CORPORATION</div>					
8					DRAWN	G.R.S.						08/25/02
7	FERRULE	COPPER	NICKEL		CHECKED							
6	COVER	BRASS	NICKEL		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:  .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"	ISSUED		TITLE  MCX R/A CRIMP PLUG (FOR RG-179/U DOUBLE BRAID CABLE)				
5	INSULATOR-2	DELRIN	NATURAL									
4	CONTACT PIN	BRASS	GOLD					SIZE	FSCM NO.	DWG. NO.	REV.	
3	INSULATOR-1	TEFLON	NATURAL	DO NOT SCALE DRAWING			A	99001	252118-75.DWG	NC		
2	BODY	BER. COPPER	NICKEL					SCALE	NA	PART NO.	SHEET	
1	HOUSING	BRASS	NICKEL							252118-75	1 OF 1	
	DESCRIPTION	MATERIAL	FINISH									