

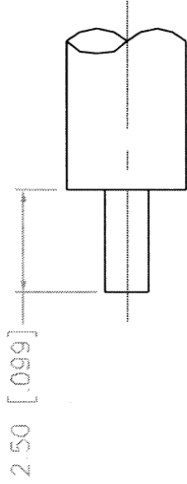


REV.	DATE	DESCRIPTION
NC	03/25/00	INITIAL RELEASE

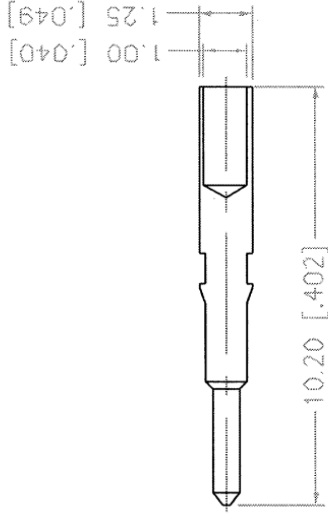

RECOMMENDED CABLE
STRIPPING DIMENSIONS

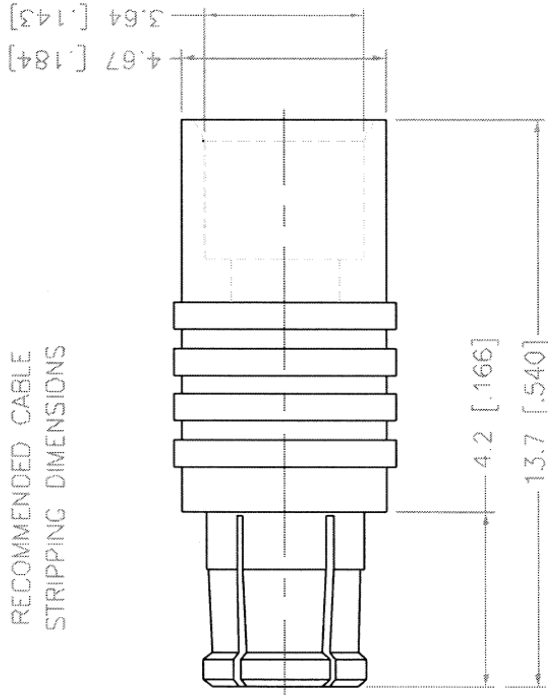

DESCRIPTION		MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY		APPROVALS	DATE		
1	BODY	BER. COPPER	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4		DRAWN	G.R.S.	03/25/00	TITLE
2	INSULATOR	TEFLON	NATURAL			CHECKED			MCX DIRECT SOLDER JACK (FOR .141" S/R CABLE)
3	CONTACT PIN	BRASS	GOLD			ISSUED			SIZE
4									FSCM NO.
5									DWG. NO.
6				DO NOT SCALE DRAWING					252111.DWG
7									REV.
8									NC
						SCALE	NA	PART NO.	252111
								SHEET	1 OF 1