
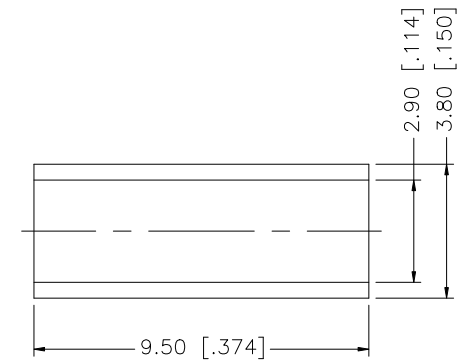
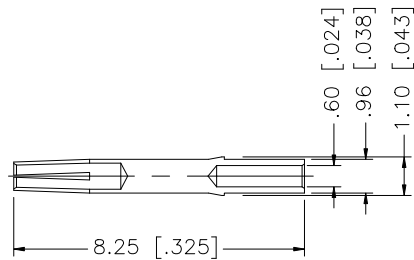
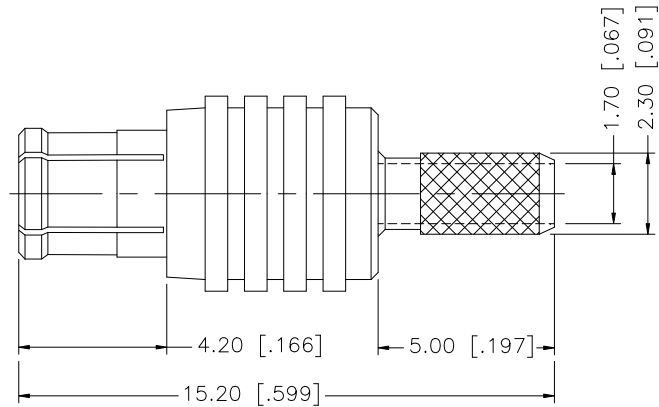


REV.	DATE	DESCRIPTION
NC	01/07/08	INITIAL RELEASE

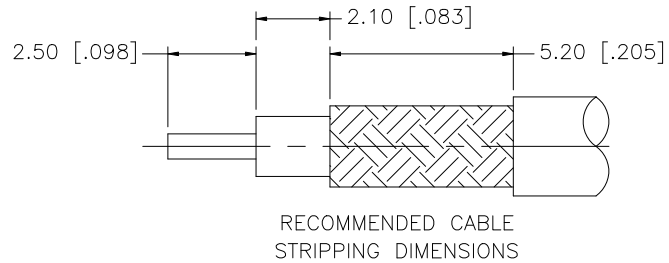

NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex							
7						DRAWN	G.R.S.	01/07/08									
6						CHECKED											
5	FERRULE	COPPER	GOLD	1						PART DESCRIPTION							
4	CONTACT PIN	BER. COPPER	GOLD	1						MCX REVERSE POLARITY CRIMP PLUG (FOR RG–174/U,188A/U,316/U)							
3	INSULATOR	TEFLON	NATURAL	1						PART NO.							
2	BODY	BER. COPPER	GOLD	1						252103RP							
1	HOUSING	BRASS	GOLD	1						DWG. NO.							
	DESCRIPTION	MATERIAL	FINISH	QTY						252103RP.DWG		REV.	NC	SIZE	A	SCALE	NA
						DO NOT SCALE DRAWING		C:/252/252103RP.DWG									