


REV.	DATE	ECR NO.	DESCRIPTION
NC	02/22/10	XXXXXX	INITIAL RELEASE

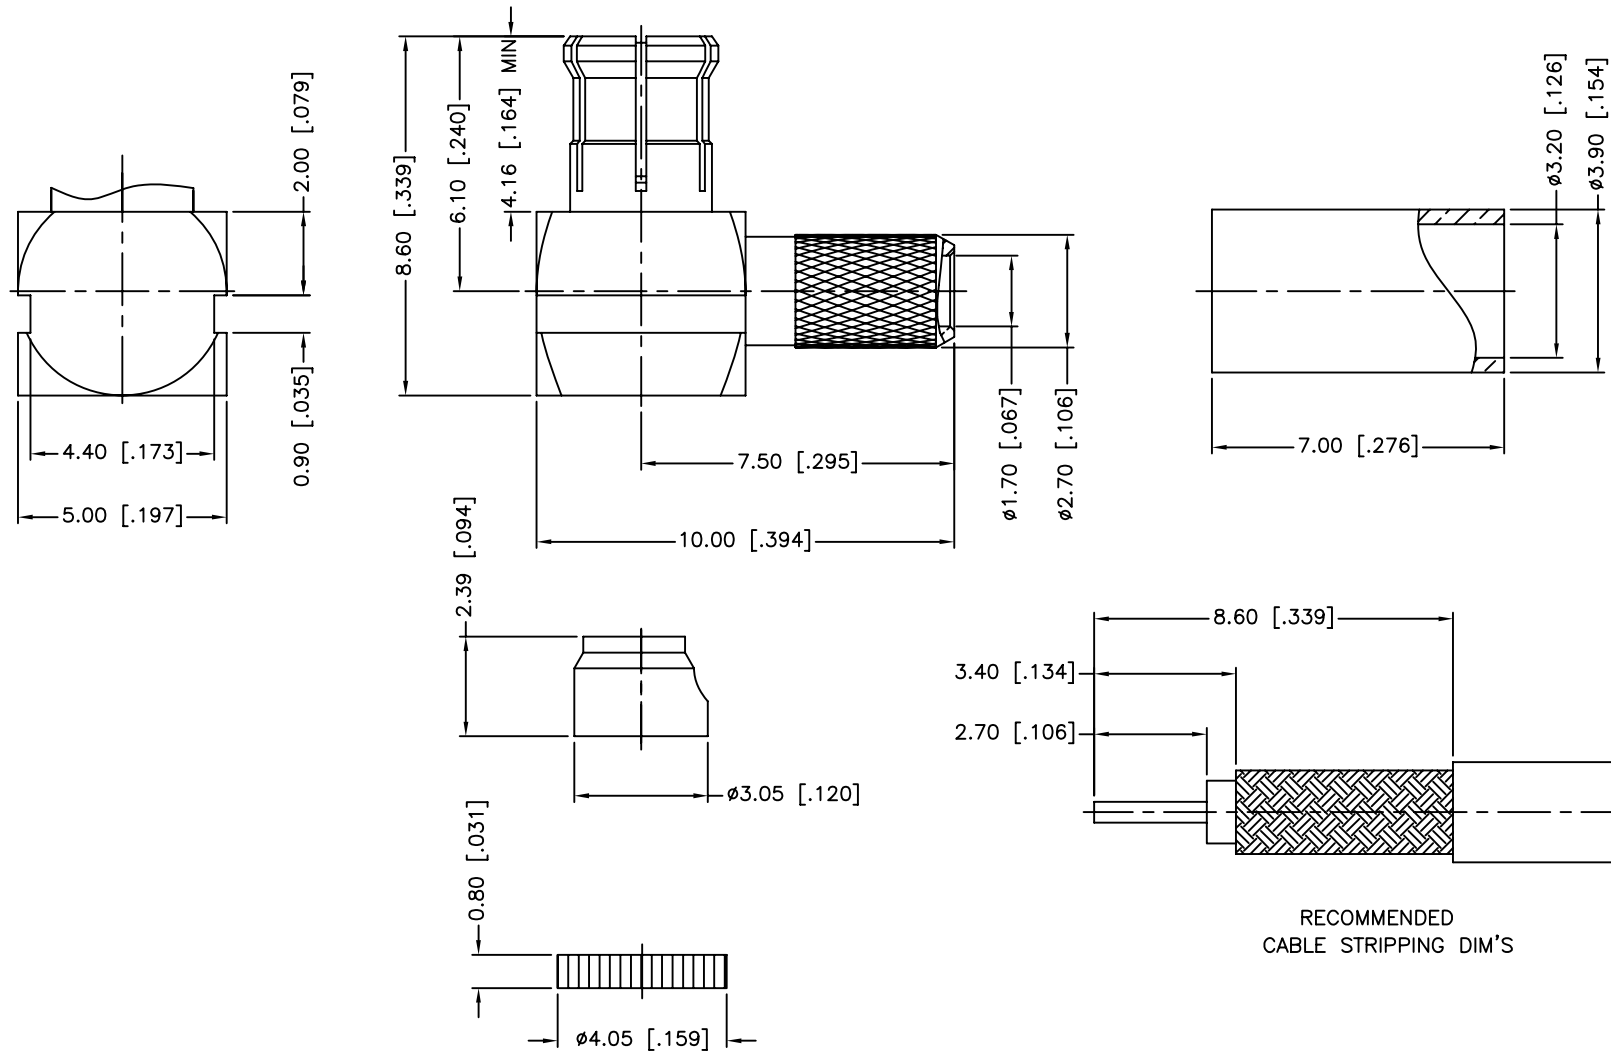

RECOMMENDED
CABLE STRIPPING DIM'S

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex							
7	FERRULE	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	DRAWN	M.ZHANG	02/22/10										
6	COVER	BRASS	GOLD	1		CHECKED												
5	INSULATOR	DELTRIN	NATURAL	1		ISSUED												
4	CONTACT PIN	BER. COPPER	GOLD	1		SHEET	1 OF 1											
3	INSULATOR	PTFE	NATURAL	1	DO NOT SCALE DRAWING	CAD FILE		PART DESCRIPTION										
2	BODY	BRASS	GOLD	1		C:/CONNEX/252102RP.DWG		MCX REVERSE POLARITY POLARITY R/A CRIMP PLUG (FOR RG-316/U CABLE)										
1	HOUSING	BRASS	GOLD	1				PART NO.										
									252102RP									
DESCRIPTION					MATERIAL	FINISH	QTY	DWG. NO.			252102RP.DWG		REV.	NC	SIZE	A	SCALE	NA