
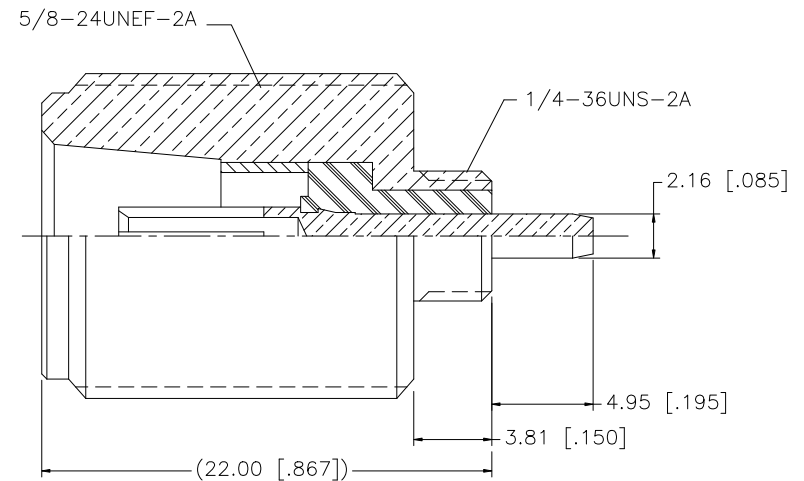
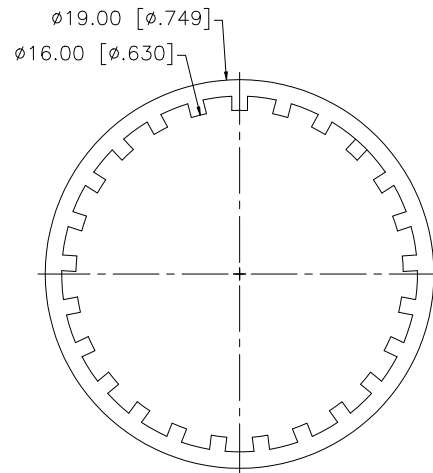


REV.	DATE	DESCRIPTION
NC	09/09/07	INITIAL RELEASE

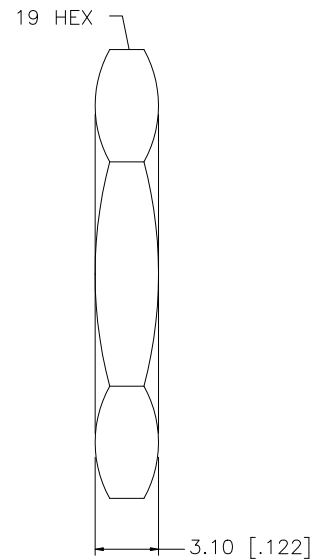

NOTES:

- MAX. PANEL THICKNESS = 2.6mm

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex								
8						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN G.R.S.		09/09/07										
7								CHECKED												
6								ISSUED				PART DESCRIPTION								
5	HEX NUT	BRASS	NICKEL	1				SHEET 1 OF 1				N JACK TO MCX JACK S/S BODY								
4	LOCK WASHER	BRASS	NICKEL	1								PART NO.								
3	INSULATOR	TEFLON	NATURAL	1								242191–10SS								
2	CONTACT PIN	BER. COPPER	GOLD	1		.020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		CAD FILE		C:/242/242191–10SS.DWG		DWG. NO.		242191–10SS.DWG	REV.	NC	SIZE	A	SCALE	NA
1	HOUSING/BODY	STAINLESS STEEL	NICKEL	1		DO NOT SCALE DRAWING														