
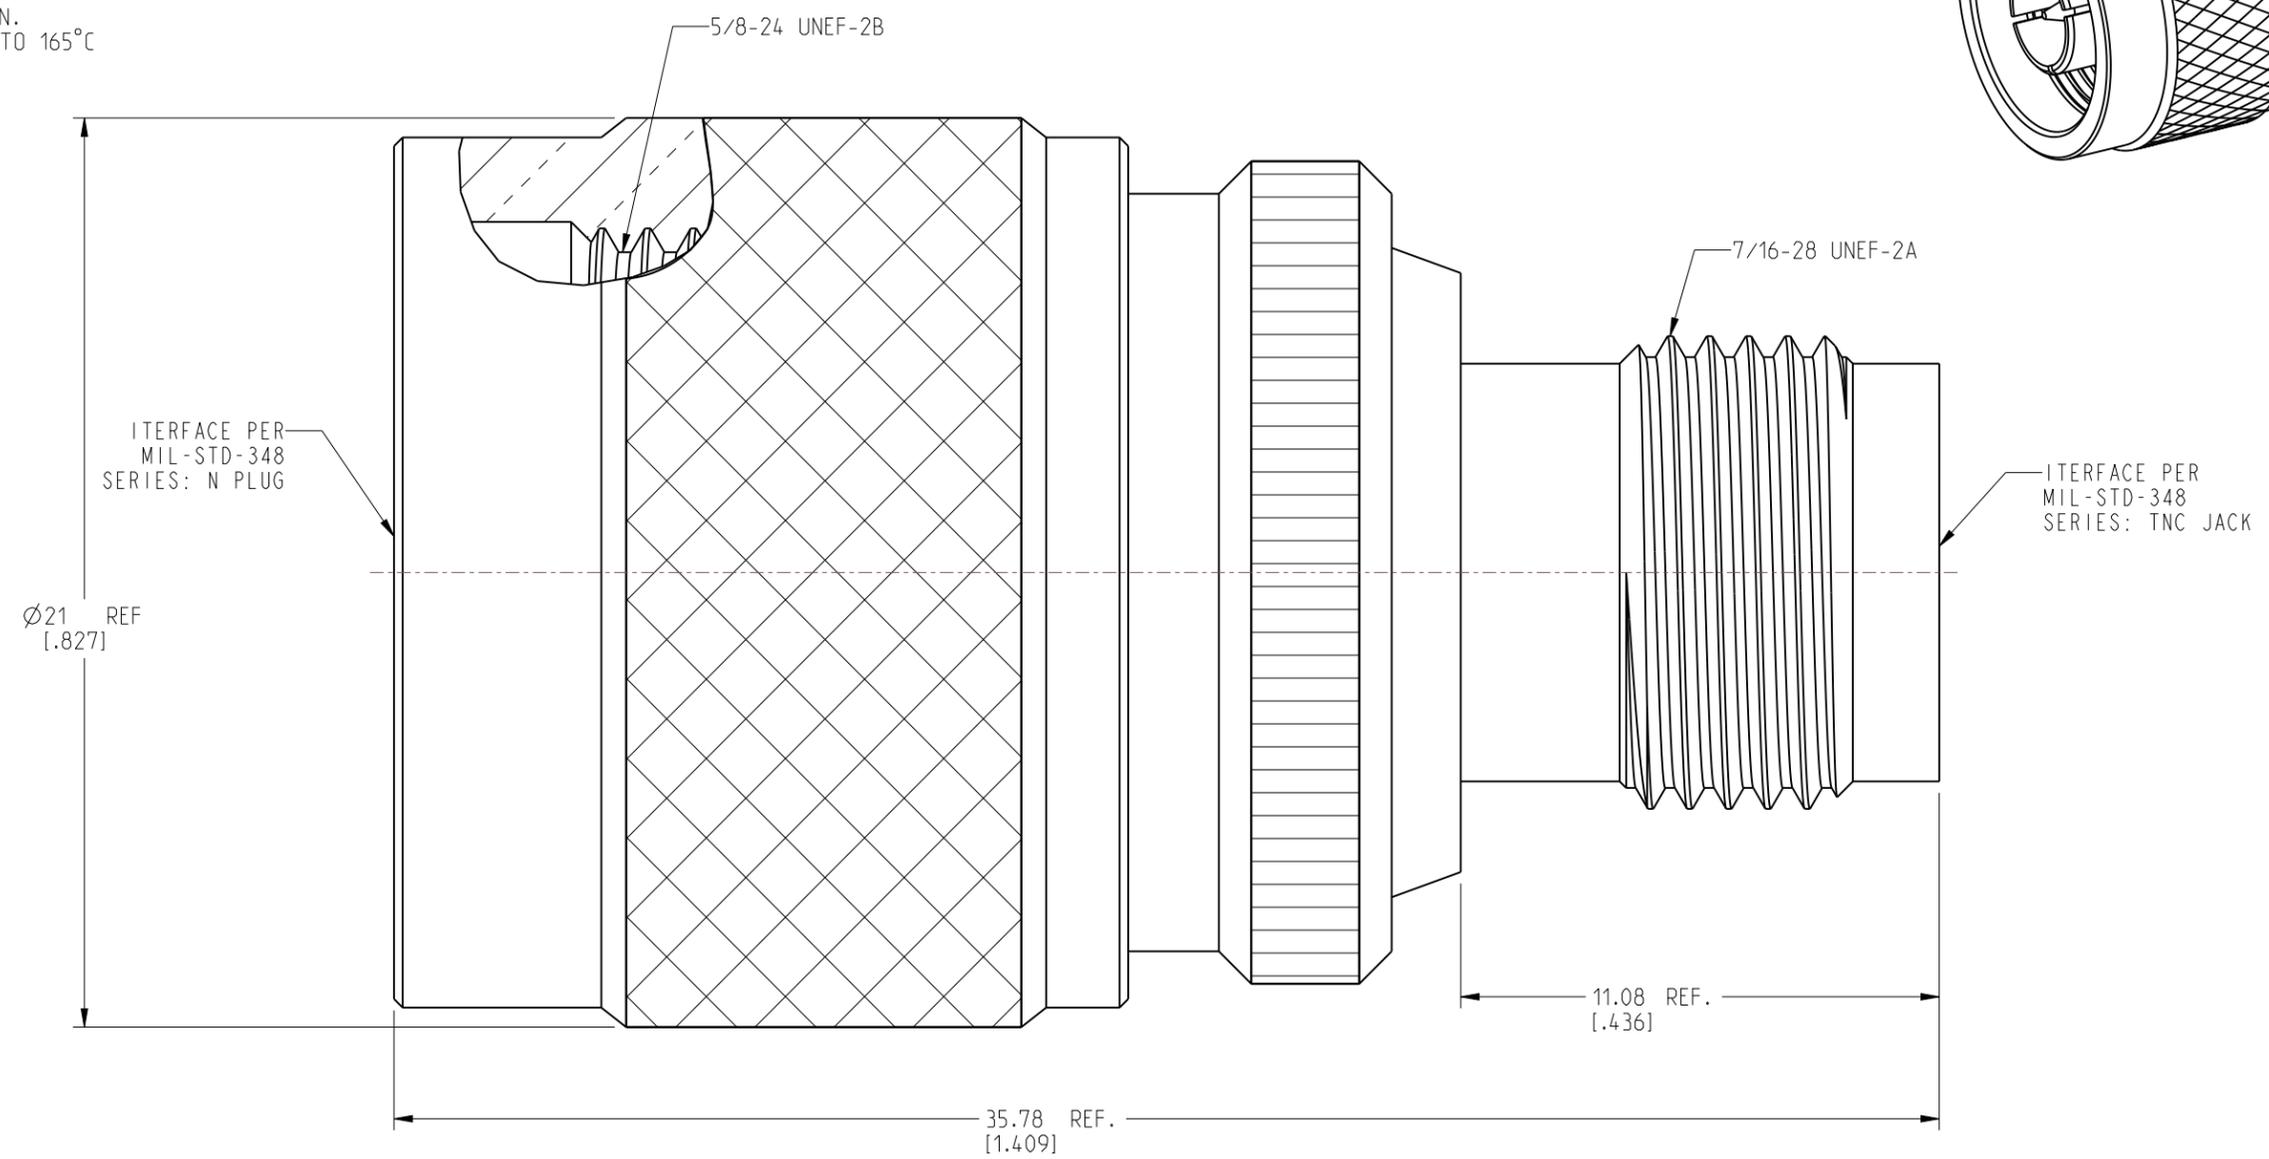


NOTES:

1. MATERIALS AND FINISHES:  
 COUPLING NUT, CONTACT BODY & BODY - BRASS, NICKEL PLATING  
 RETAINER RING - SUS 304, NATURAL  
 CONTACT - PHOSPHOR BRONZE, GOLD PLATING  
 GASEKT - SILICONE RUBBER, RED  
 INSULATOR - PTFE, NATURAL
2. ELECTRICAL:  
 A. IMPEDANCE: 50 OHM  
 B. FREQUENCY RANGE: DC-11 GHz  
 C. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
3. MECHANICAL:  
 A. DURABILITY: 500 CYCLES MIN.  
 B. TEMPERATURE RANGE: -65°C TO 165°C

REVISIONS				
REV	DESCRIPTION	DATE	ECN	BY
NC	INITIAL RELEASE	--	----	--
A	UPDATE DRAWING FORMAT	03/27/05	----	G.R.S
B	REDRAWN IN CREO. FORMAT UPDATE	10/19/2023	16797	ED

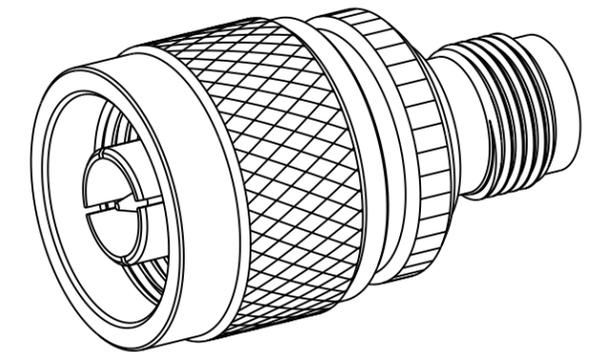

**CUSTOMER OUTLINE DRAWING**  
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE: <0.5mm = ±0.05mm [ $<0.020 = \pm 0.002$ ] 0.5 - 6mm = ±0.1mm [ $>0.020 - 0.236 = \pm 0.004$ ] >6.00 - 30mm = ±0.2mm [ $>0.236 - 1.181 = \pm 0.008$ ] >30.00 - 120mm = ±0.3mm [ $>1.181 - 4.725 = \pm 0.012$ ] ANGLES = ±1°		MATERIAL SEE NOTE 1		TITLE N MALE TO TNC FEMALE ADAPTOR		<b>Amphenol RF</b>	
THIRD ANGLE PROJ.		REFERENCE		ENGR.1 TONY		ENGR.2 M.ZHANG		DATE 13-Oct-23	
EAR# LEGACY		SHEET NO. 2 OF 2		SCALE: 6.0:1.0		DRAWING NO. NM-TF1-NT3G-50 ITEM NO. 03M-02F1-NA-5-F PART NO. 242130		REV B	