
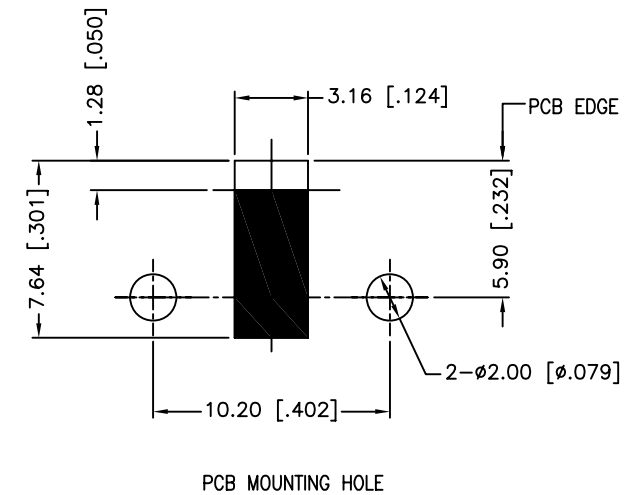
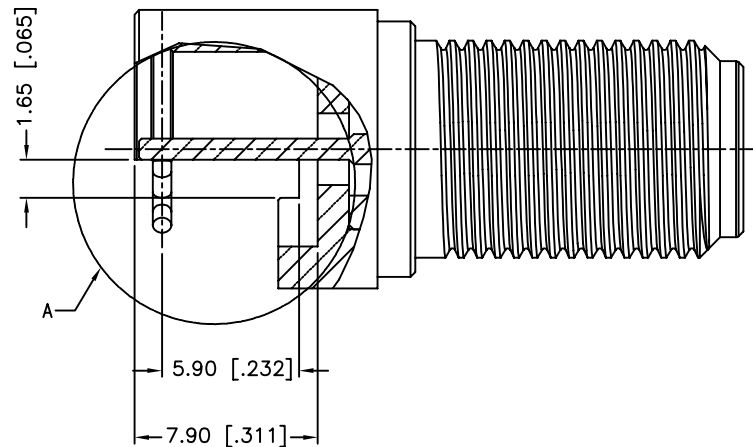
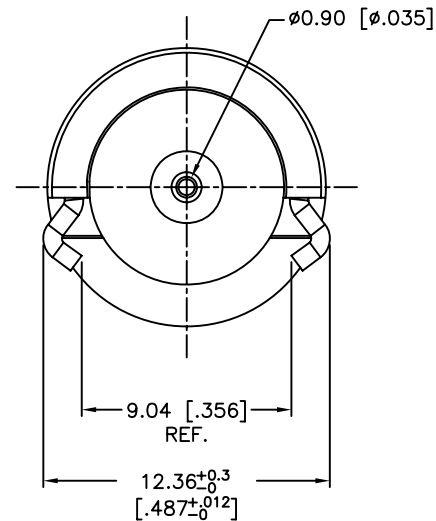
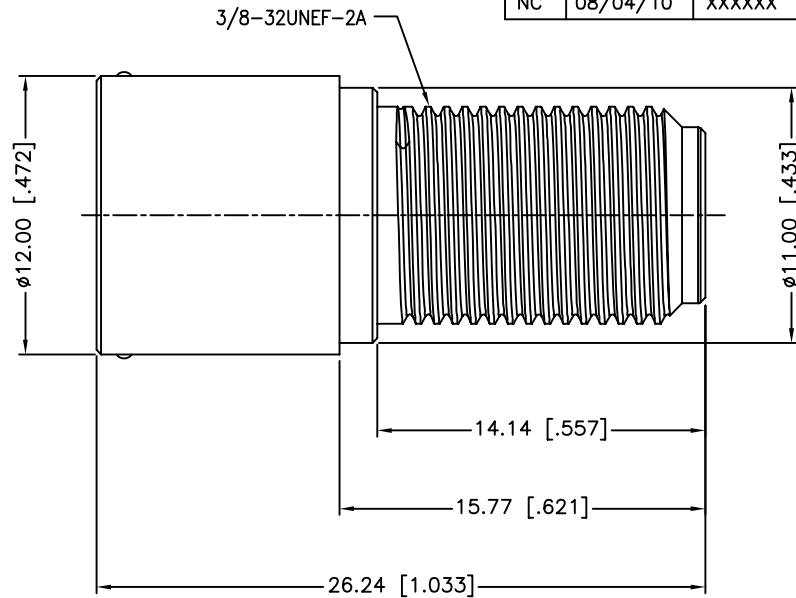


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/04/10	XXXXXX	INITIAL RELEASE

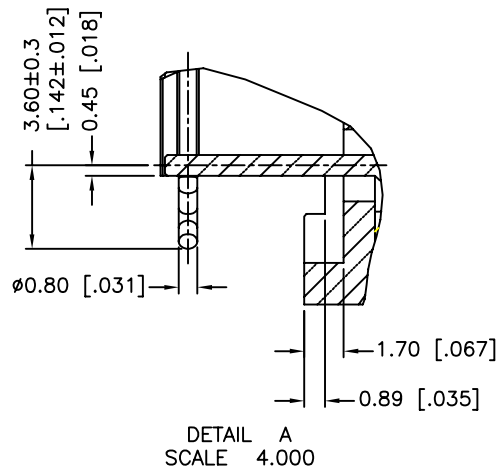

1. FREQUENCY RANGE: DC 0-3 GHz
2. VSWR(RETURN LOSS): 1.15, MAX.
4. CENTER CONTACT TO ACCEPT 0.022" TO 0.04" PIN [0.56 MM TO 1.04 MM]

DESCRIPTION	MATERIAL	FINISH	QTY
5 LEG	STAINLESS STEEL	NICKEL	1
4 CONTACT PIN	BER. COPPER	GOLD	1
3 INSULATOR	PTFE	NATURAL	1
2 INSULATOR	PTFE	NATURAL	1
1 HOUSING	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		DRAWN M.ZHANG	08/04/10
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"		CHECKED	
DO NOT SCALE DRAWING		ISSUED	
		SHEET 1 OF 1	
		CAD FILE C:/CONNEX/222212.DWG	

Amphenol Connex

PART DESCRIPTION			
F END LAUNCH RECEPTACLE JACK (75 ohm)			
PART NO. 222212			
DWG. NO. 222212.DWG	REV. NC	SIZE A	SCALE NA