

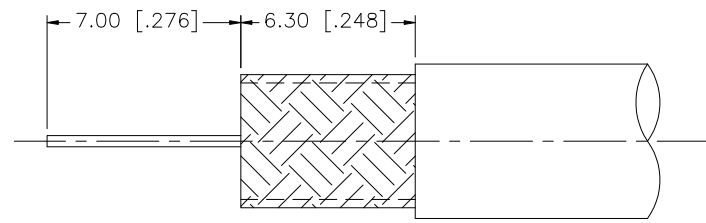


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/30/98	—	INITIAL RELEASE
A	12/15/98	—	ADD STRIPPING DIMS. AND ASSEMBLY INSTRUCTIONS.
B	01/22/09	—	ADD PLUG INTERNAL DIMS. /REVISE STRIPPING DIMS. AND INSTRUCTIONS

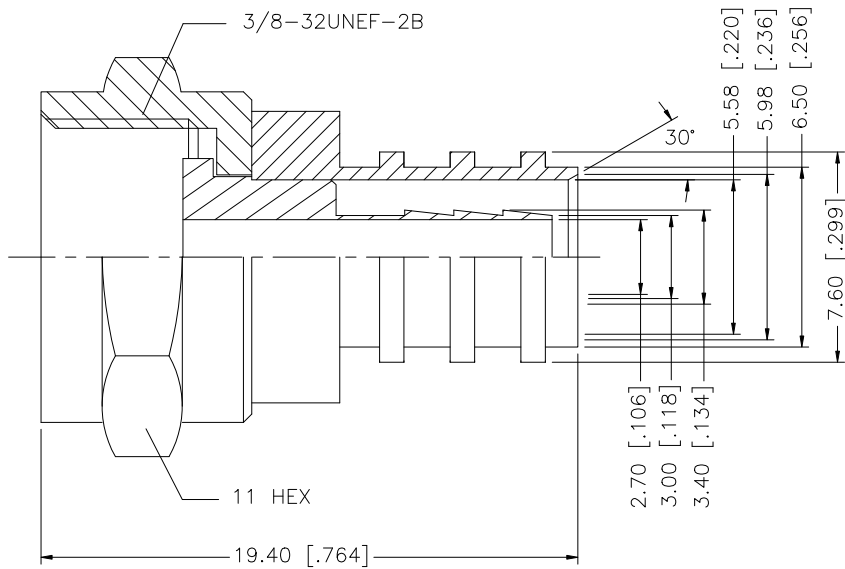

STEP-1
STRIP CABLE TO RECOMMENDED DIMENSIONS

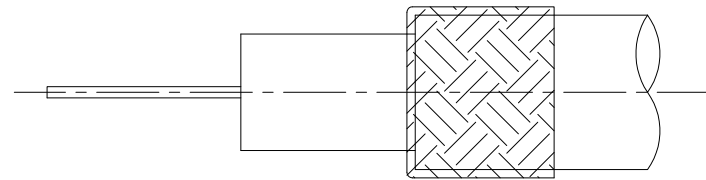

STEP-2
FOLD SHIELD BACK AS SHOWN.

NOTE:

1. CRIMPED HOUSING HEX CRIMP SIZE .255" [6.48]

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8					DRAWN	GRS	01/21/09							
7					CHECKED									
6						ISSUED			PART DESCRIPTION					
5						SHEET	1 OF 1							
4								PART NO.						
3	HOUSING	BRASS	NICKEL		1									
2	BODY	BRASS	NICKEL		1			222147						
1	SHELL	DIE CAST	NICKEL	1										
DESCRIPTION				MATERIAL	FINISH	QTY	CAD FILE		DWG. NO.		REV.	SIZE	SCALE	
							C:/222/222147.DWG		222147.DWG		B	A	NA	