
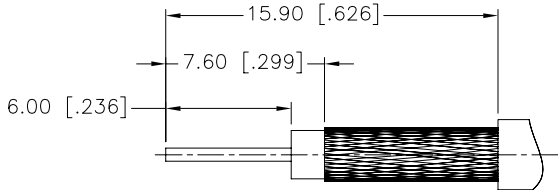


REV.	DATE	ECR NO.	DESCRIPTION
NC	07/14/09	XXXXXX	INITIAL RELEASE

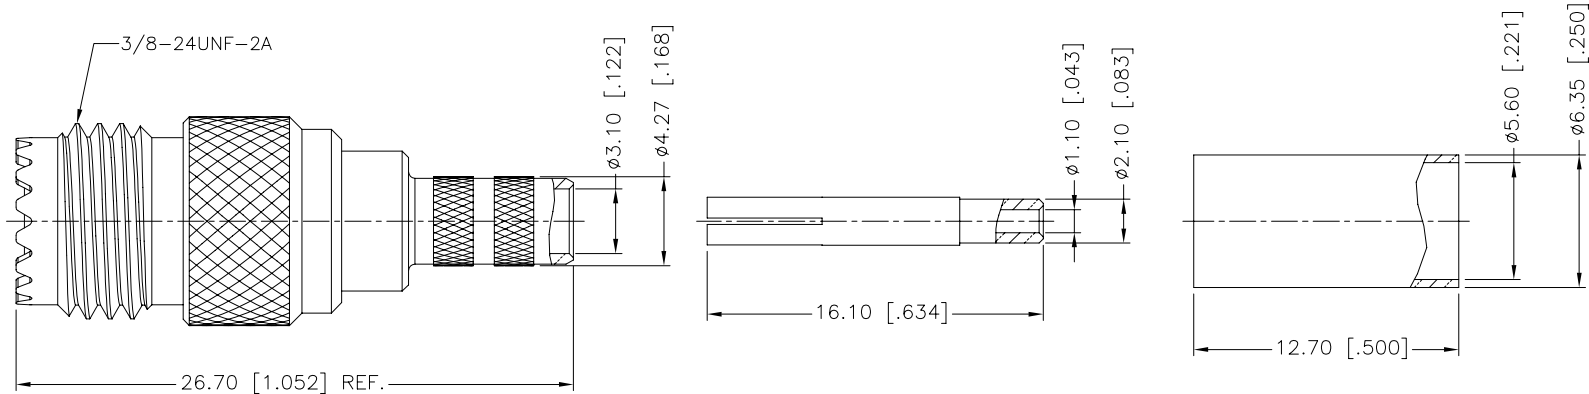

RECOMMENDED
CABLE STRIPPING DIM'S

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
						DRAWN	J.CHENG		07/14/09								
						CHECKED											
5						FERRULE	BRASS		NICKEL		1		PART DESCRIPTION MINI-UHF CRIMP JACK (FOR RG-142A/U,223/U)				
4						CONTACT PIN	PHOSPHOR BRONZE		GOLD		1						
3					INSULATOR	PTFE		NATURAL		1							
2					BARREL	BRASS		NICKEL		1		PART NO. 182309					
1					BODY	BRASS		NICKEL		1							
					DESCRIPTION	MATERIAL		FINISH		QTY		DWG. NO. 182309.DWG					
											REV. NC						
											SIZE A						
											SCALE NA						