

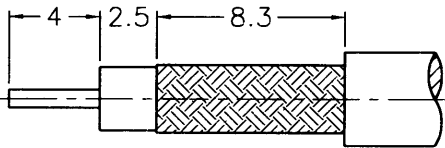
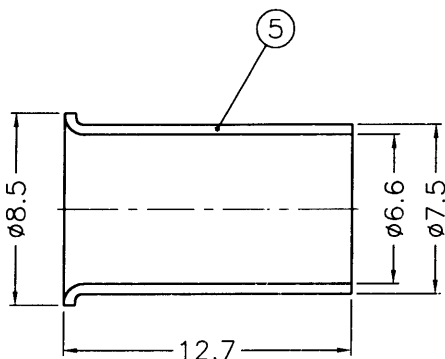
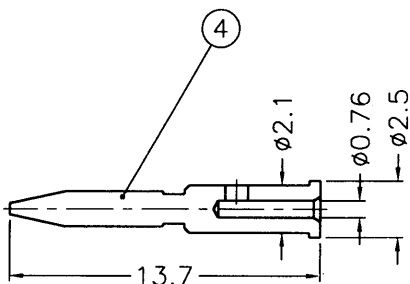


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

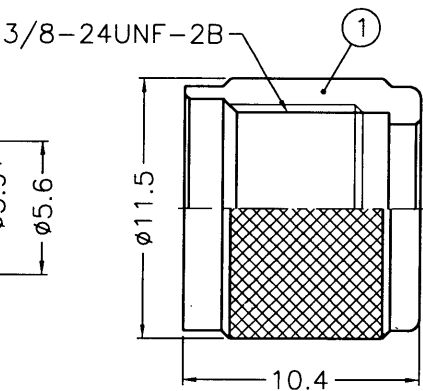


RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

REFERENCE ONLY

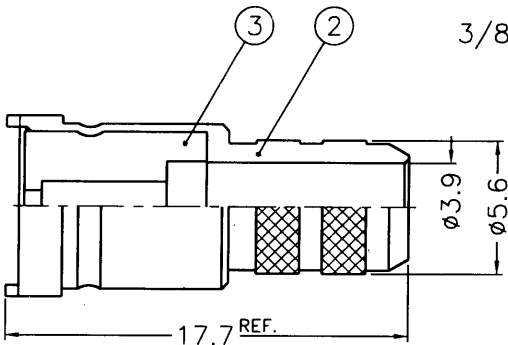

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK
 OVER COPPER STRIKE
 4. TEFLON MIL-P-19468
 5. JIS H 3250, C 2700

5	FERRULE	NOTE 5	NOTE 2	1	FR-85/66-75/66 X127	DIMENSIONS ARE IN MILLIMETERS				PART NO.		 KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.
4	CONTACT PIN	NOTE 1	NOTE 3	1	MU5000-4-25/ 076	UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				APPROVED  DATE 05-19-99'	TITLE MINI-UHF CRIMP PLUG	
3	INSULATOR	NOTE 4	NATURAL	1	MU5000-3T-50-B					CHECKED  DATE 05-19-99'	DRAWING NO. KJ-MU1121A1-NT3G-59U-50	
2	BODY	NOTE 1	NOTE 2	1	MU5000-2-56/39 -A					DRAWN  DATE 05-19-99'	FILE NO. F:\DWG\MU\1121A1\59U-50\NT3G	
1	SHELL	NOTE 1	NOTE 2	1	MU5000-1							
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A			



KAI JACK INDUSTRIAL CO., LTD.
TAINAN TAIWAN R.O.C.

8/11/99