
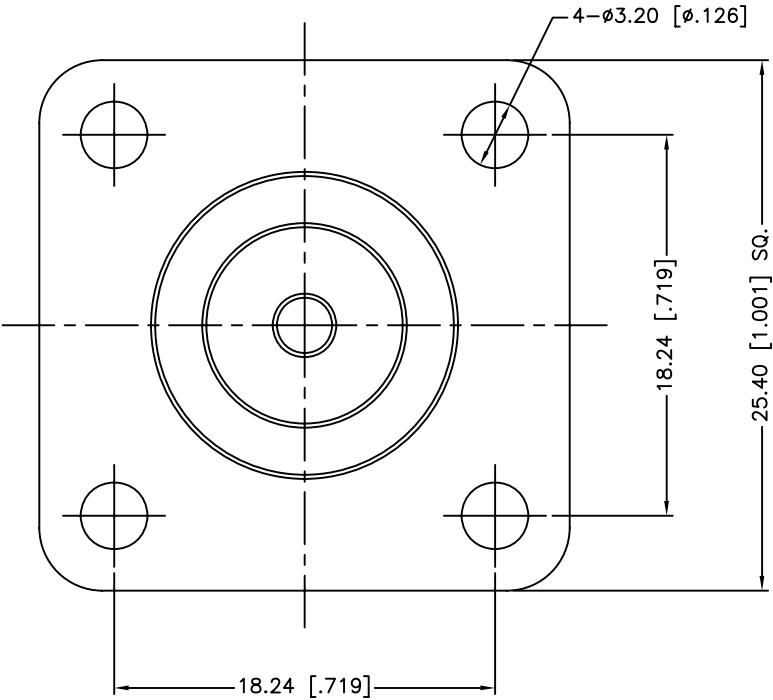


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/26/09	XXXXXX	INITIAL RELEASE

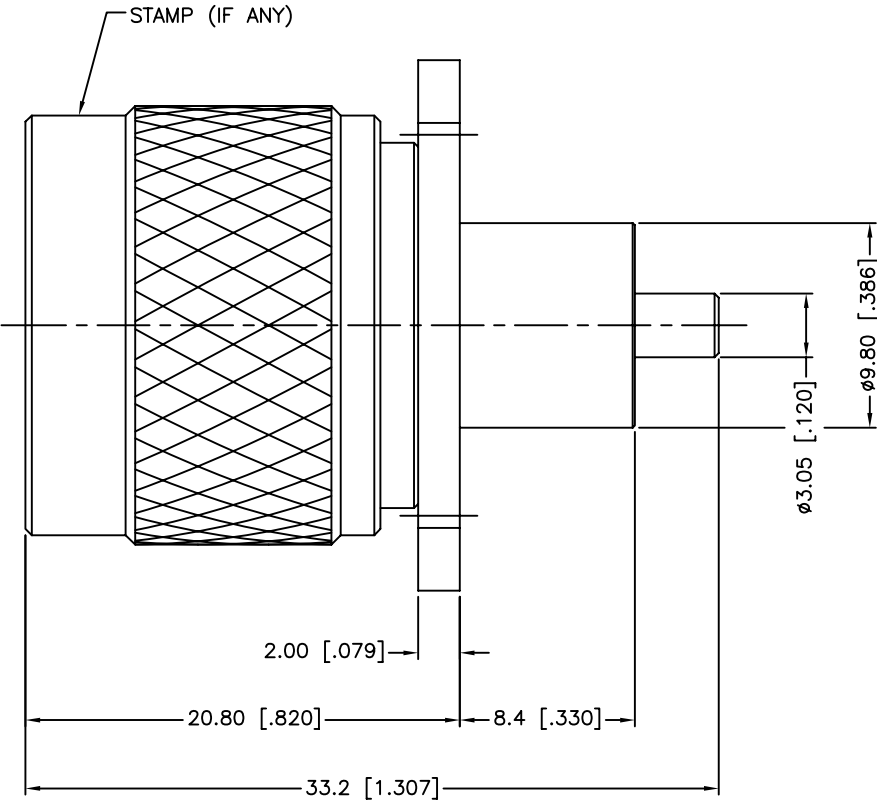

1. FREQUENCY RANGE: DC 0–11 GHz
2. VSWR(RETURN LOSS): 1.10 + .01 f(GHz)

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex						
7	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"		DRAWN		M.ZHANG							11/26/09	
6	INSULATOR	PTFE	NATURAL	1			CHECKED										
5	BODY WITH PANEL	BRASS	NICKEL	1			ISSUED										
4	RETAINING RING	SUS 304	NATURAL	1			SHEET		1 OF 1								
3	GASKET	SILICONE	RED	1	DO NOT SCALE DRAWING		CAD FILE		C:/CONNEX/172353.DWG		PART DESCRIPTION						
2	CONTACT BODY	BRASS	NICKEL	1							N PANEL RECEPT. PLUG WITH STRAIGHT TERMINAL						
1	SHELL	BRASS	NICKEL	1							PART NO. 172353						
	DESCRIPTION	MATERIAL	FINISH	QTY							DWG. NO. 172353.DWG						
											REV. NC		SIZE A		SCALE NA		