

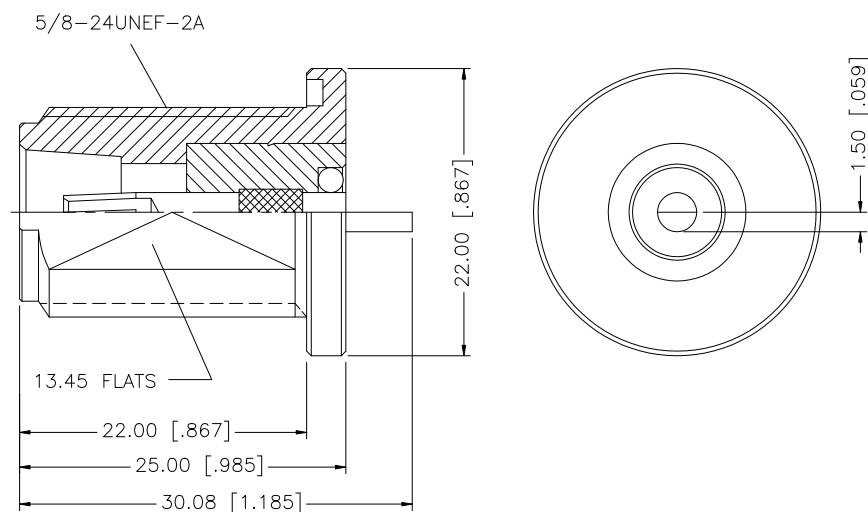


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/26/09	—	INITIAL RELEASE

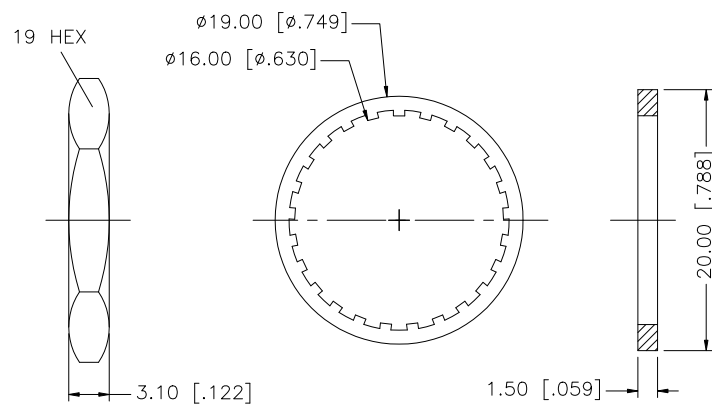

RECOMMENDED MOUNTING
HOLE DIMENSIONS

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	GRS	01/26/09						
7	O—RING	SILICONE	BLACK	1		CHECKED			PART DESCRIPTION N BULKHEAD DIRECT SOLDER JACK					
6	HEX NUT	BRASS	NEXCOTE	1		ISSUED								
5	LOCK WASHER	BRASS	NEXCOTE	1		SHEET	1 OF 1		PART NO. 172347					
4	GASKET	SILICONE	RED	1										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		CAD FILE		C:/172/172347.DWG		DWG. NO. 172347.DWG REV. NC SIZE A SCALE NA				
2	INSULATOR	PTFE	NATURAL	1										
1	BODY	BRASS	NEXCOTE	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										