


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/09/10	XXXXXX	INITIAL RELEASE

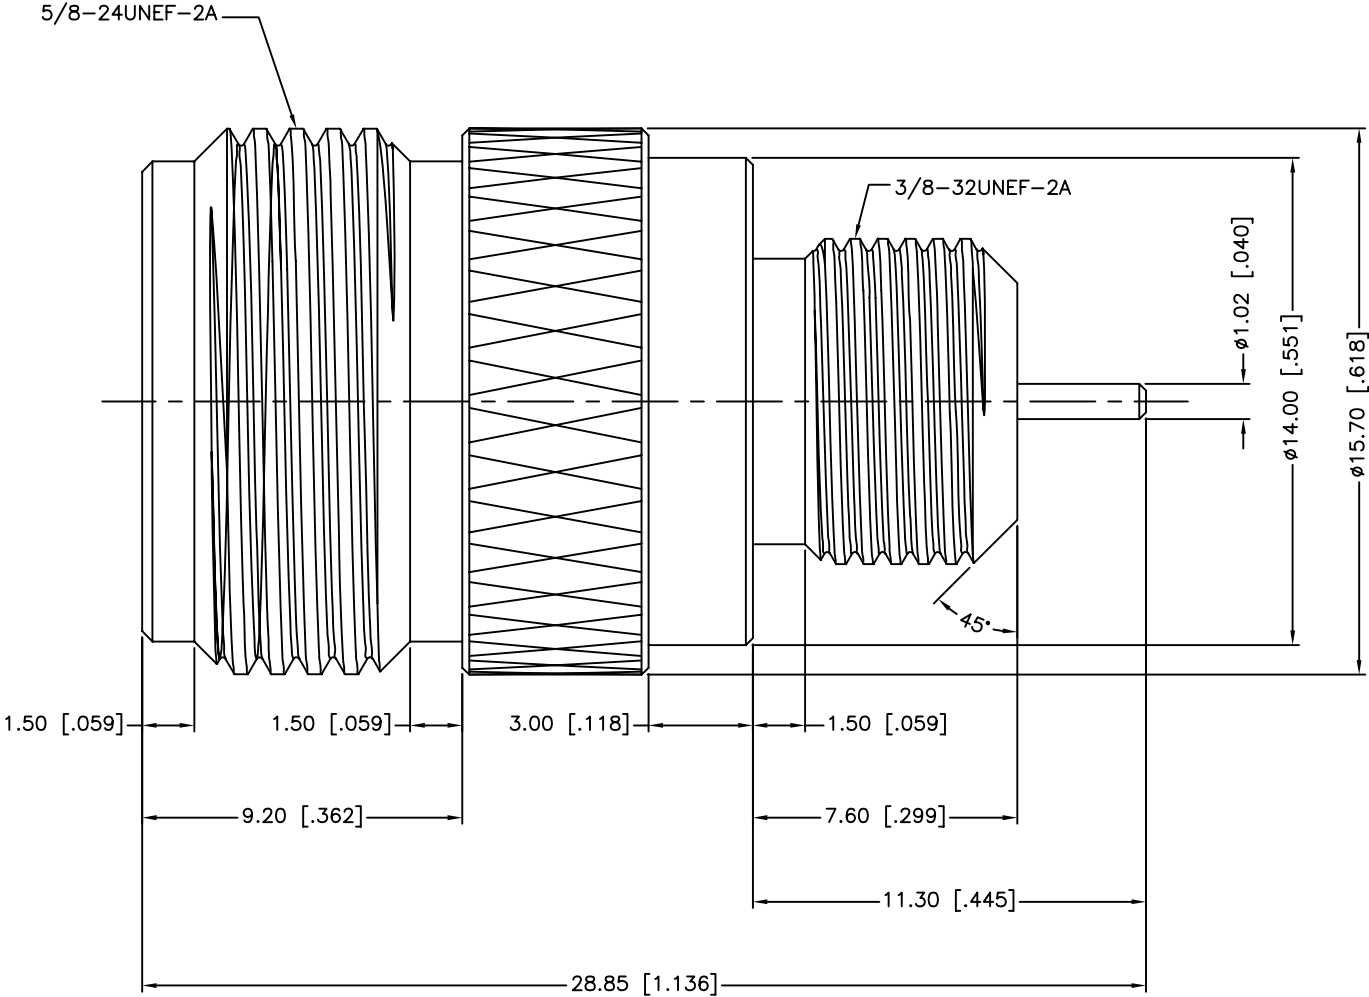

1. FREQUENCY RANGE: 0 – 11 GHz
2. VSWR (RETURN LOSS): 1.15 MAX.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex				
					DRAWN M.ZHANG		03/09/10						
					CHECKED				PART DESCRIPTION N BULKHEAD JACK BLUNT POST – 50 OHM				
					ISSUED								
SHEET 1 OF 1													
					PART NO. 172341								
					DWG. NO. 172341.DWG					REV. B	SIZE A	SCALE NA	
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1									
3	INNER BODY	BRASS	NICKEL	1									
2	INSULATOR	PTFE	NATURAL	1									
1	BODY	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY									