
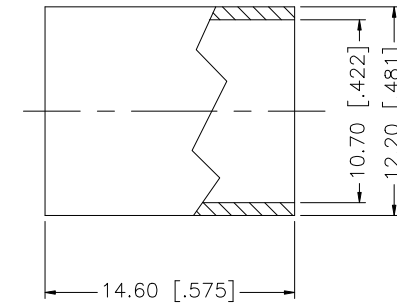


RECOMMENDED CABLE
STRIPPING DIMS.

REV.	DATE	ECR NO.	DESCRIPTION
NC	11/23/08	—	INITIAL RELEASE
A	02/10/09	100081	REVISE COUPLING NUT AREA — ADD 19MM HEX
B	03/23/09	100086	COMPLETE BODY, FERRULE RE-DESIGN

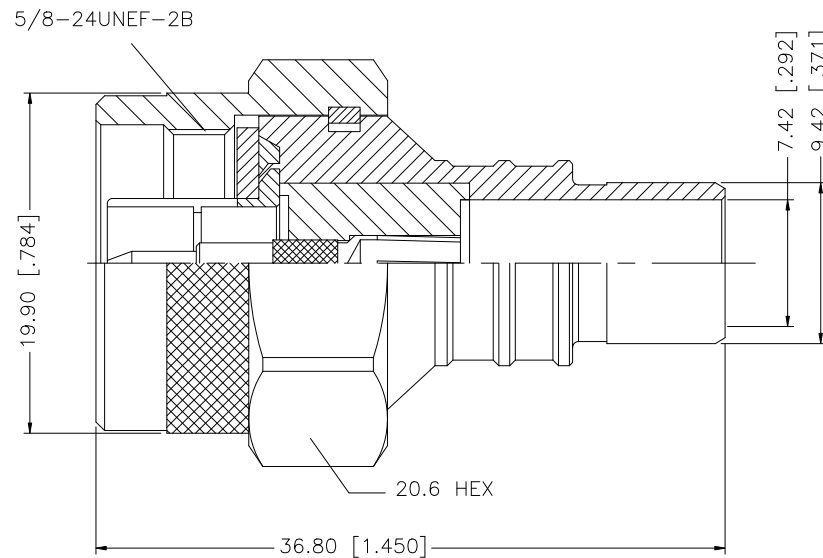

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .429" [10.90]

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex							
8						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN	GRS	03/23/09									
7	FERRULE	COPPER	NEXCOTE	1				CHECKED											
6	GASKET	SILICONE	RED	1				ISSUED				PART DESCRIPTION N CRIMP PLUG (FOR LMR400 CABLE – CONTACT IN BODY)							
5	CONTACT BODY	BRASS	NEXCOTE	1				SHEET	1 OF 1										
4	CONTACT PIN	PHOS. BRONZE	GOLD	1															
3	INSULATOR	PTFE	NATURAL	1								PART NO. 172345							
2	BARREL	BRASS	NEXCOTE	1															
1	SHELL	BRASS	NEXCOTE	1															
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE		C:/172/172345.DWG		DWG. NO.		172345.DWG	REV.	B	SIZE	A	SCALE	NA