

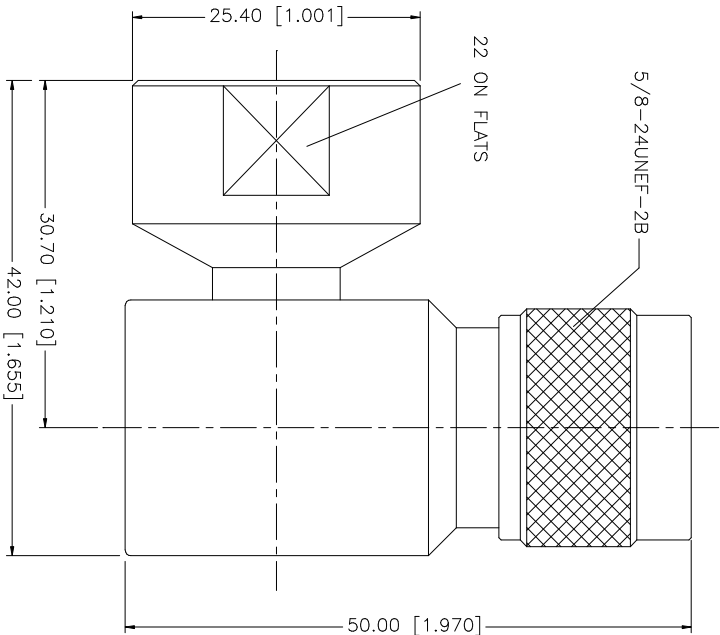
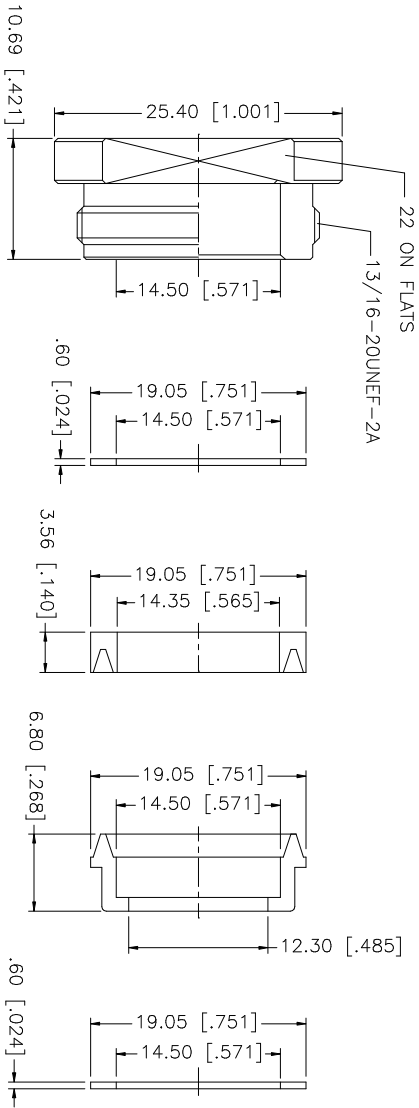


REV.	DATE	DESCRIPTION
NC	08/20/03	INITIAL RELEASE

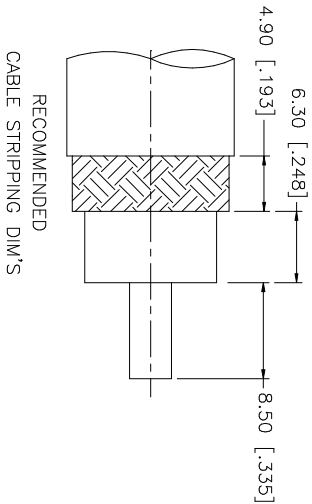

NOTE:

1. CONTACT PIN TO SOLDER

9	GASKET	SILICONE	RED	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex N R/A CLAMP PLUG (FOR RG-217/U CABLE)													
8	COVER	BRASS	NEXCOTE	1								DRAWN	G.R.S.	08/20/03							
7	NUT	BRASS	NEXCOTE	1																	
6	GASKET	SILICONE	RED	1		CHECKED															
5	BEAD CLAMP	BRASS	NEXCOTE	1		ISSUED															
4	WASHER	BRASS	NEXCOTE	2		SHEET	1 OF 1														
3	CONTACT PIN	BRASS	GOLD	1																	
2	INSULATOR	TEFLON	NATURAL	1		PART NO.						172310									
1	BODY	BRASS	NEXCOTE	1		CAD FILE						C:/172/172310.DWG									
DESCRIPTION					MATERIAL		FINISH		QTY	DO NOT SCALE DRAWING	CAD FILE	C:/172/172310.DWG		DWG. NO.	172310.DWG	REV.	NC	SIZE	A	SCALE	NA