

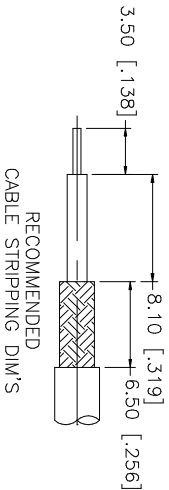










DESCRIPTION		
REV.	DATE	
A	04/14/04	UPDATE GASKET TO PART LIST / UPDATE DRAWING FORMAT



RECOMMENDED
CABLE STRIPPING DIM'S

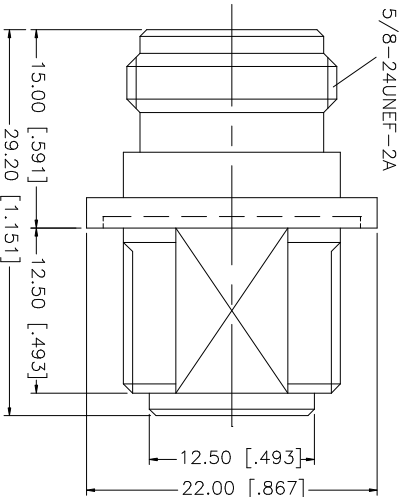

RECOMMENDED
MOUNTING HOLE

CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .151"

9	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"		DO NOT SCALE DRAWING	
8	HEX NUT	BRASS	NICKEL	1				
7	LOCK WASHER	BRASS	NICKEL	1				
6	GASKET	SILICONE	RED	1				
5	SOLDER NUT	BRASS	NICKEL	1				
4	SOLDER BARREL	BRASS	NICKEL	1	PART DESCRIPTION N BULKHEAD CRIMP JACK (FRONT MOUNT FOR 316/U DOUBLE BRAID CABLE)		PART NO. 1722262	
3	CONTACT PIN	PHOS. BRONZE	GOLD	1				
2	INSULATOR	TEFLON	NATURAL	1				
1	HOUSING/BODY	BRASS	NICKEL	1				
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE C:/172/1722262.DWG		DWG. NO. 1722262.DWG	REV. A SIZE A SCALE NA