
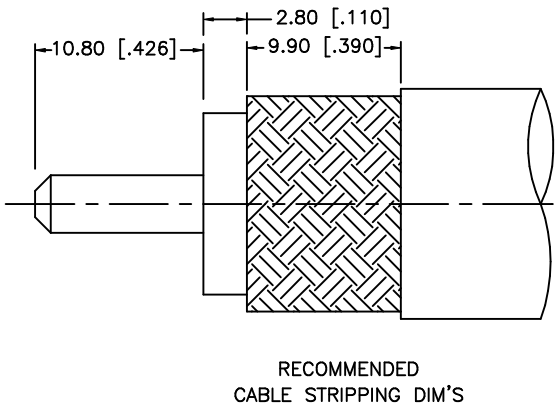
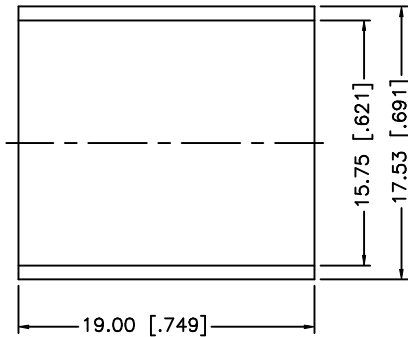


REV.	DATE	DESCRIPTION
NC	02/20/07	INITIAL RELEASE

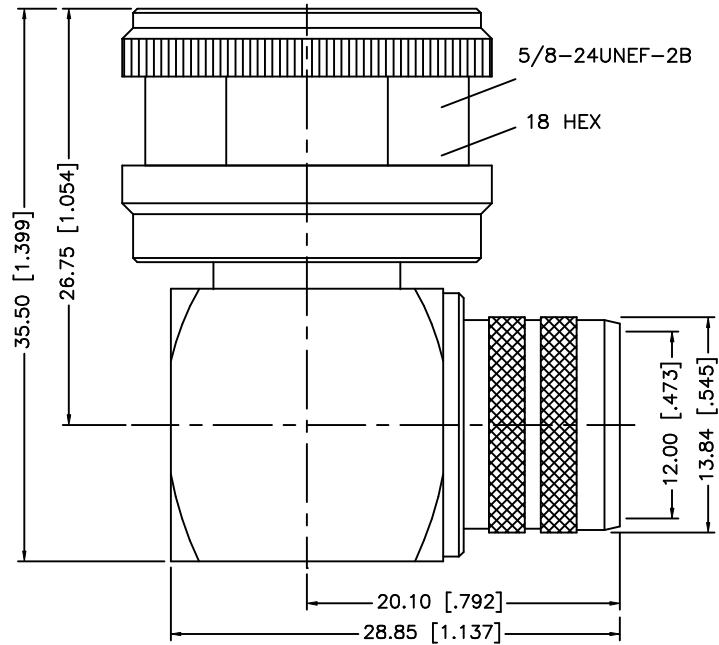

RECOMMENDED
CABLE STRIPPING DIM'S

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .600"
 2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
7						DRAWN	G.R.S.						02/20/07	
6						CHECKED			PART DESCRIPTION N R/A DIRECT CRIMP PLUG – SP. HEX NUT (FOR LMR-600 CABLE)					
5	FERRULE	COPPER	NEXCOTE	1		ISSUED								
4	COVER	BRASS	NEXCOTE	1		SHEET	1 OF 1		PART NO. 172263–10					
3	CONTACT PIN	BRASS	GOLD	1										
2	INSULATOR	TEFLON	NATURAL	1				DWG. NO. 172263–10.DWG						
1	BODY	BRASS	NEXCOTE	1										
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE	C:/172/172263–10.DWG	REV.	NC	SIZE	A	SCALE	NA