

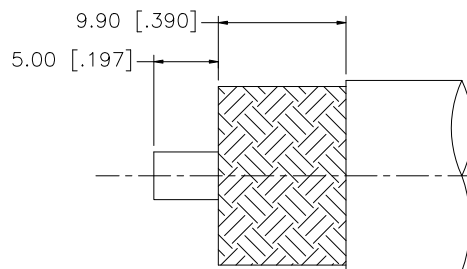
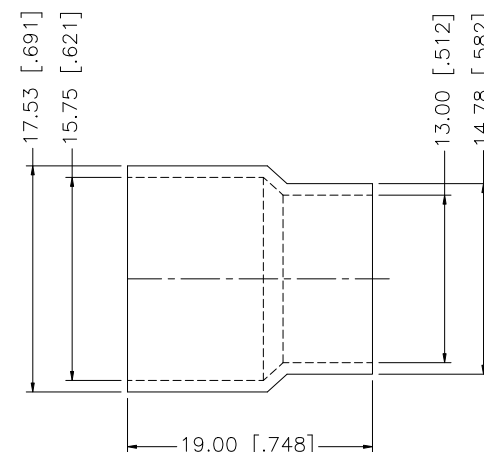


REV.	DATE	DESCRIPTION
NC	07/26/00	INITIAL RELEASE
A	10/27/07	UPDATE DRAWING FORMAT, ADD NOTES

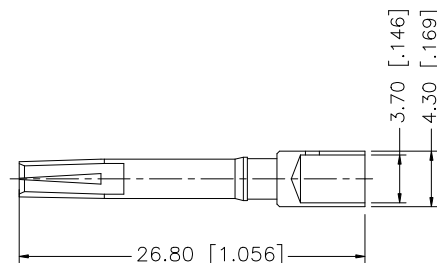

RECOMMENDED
CABLE STRIPPING DIM'S

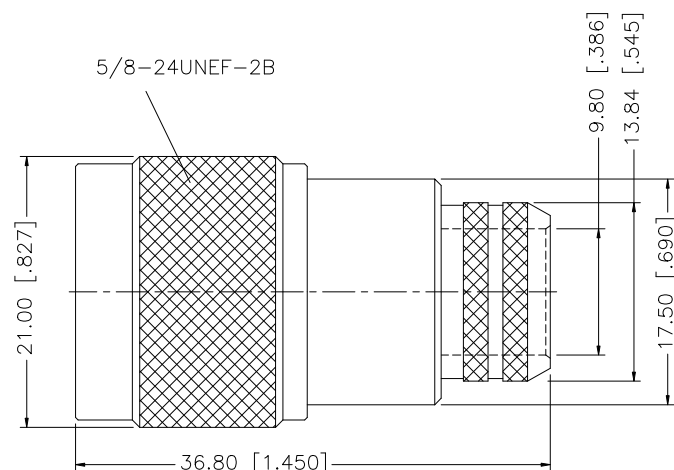

NOTE:

- PLEASE CONTACT AMPHENOL CONNEX FOR CRIMP TOOL INFORMATION.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
8						DRAWN	G.R.S.	10/27/07								
7						CHECKED										
6	FERRULE	COPPER	NEXCOTE	1		PART DESCRIPTION	N CRIMP PLUG REVERSE POLARIZED (FOR FLEXABLE LMR 500 CABLE)									
5	CONTACT PIN	PHOS. BRONZE	GOLD	1												
4	INSULATOR	TEFLON	NATURAL	1												
3	GASKET	SILICONE	RED	1												
2	RETAINER RING	SUS 304	NATURAL	1		PART NO.	172259RP									
1	BODY	BRASS	NEXCOTE	1												
DESCRIPTION		MATERIAL	FINISH	QTY		CAD FILE	C:/172/172259RP.DWG		DWG. NO.	172259RP.DWG		REV.	A	SIZE	A	SCALE