
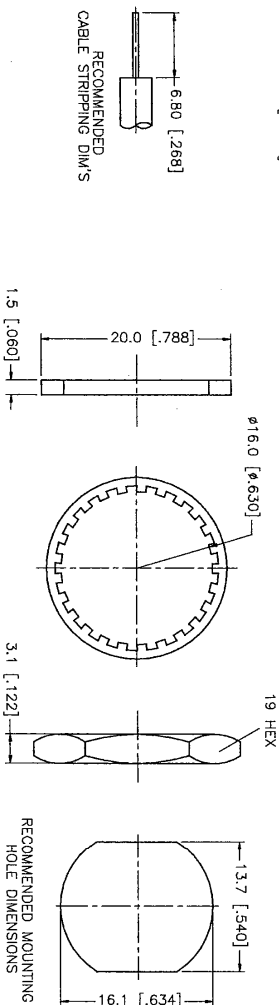
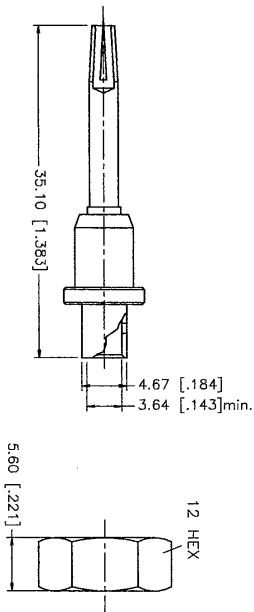


STAMP "CONNEX"

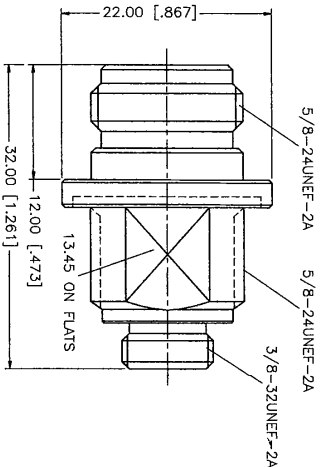

RECOMMENDED
CABLE STRIPPING DIM'S

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS FOR CUSTOMER REFERENCE ONLY	APPROVALS	DATE	TITLE	SIZE	FORM NO.	DWG. NO.	REV.
1 BODY	BRASS	NICKEL		DRAWN	07/30/00	N BULKHEAD DIRECT SOLDER JACK (FOR .141" SEMI RIGID CABLE)	A	99001	172258.DWG	NC
2 INSULATOR	TEFLON	NATURAL		CHECKED						
3 CONTACT PIN	PHOS. BRONZE	GOLD								
4 SOLDER BARREL	BRASS	GOLD								
5										
6										
7										
8										

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
FOR CUSTOMER REFERENCE ONLY

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-318 = ± 1.6
318-1000 = ± 2.4
1000-2000 = ± 2.4

DO NOT SCALE DRAWING

SCALE NA PART NO. 172258 SHEET 1 OF 1

Connector Corporation