
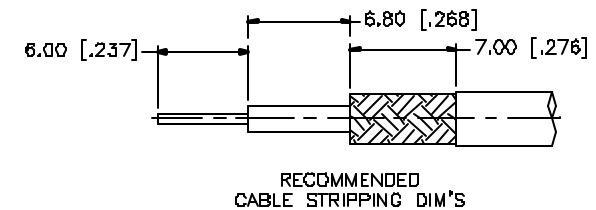



REV.	DATE	DESCRIPTION
NC	03/08/05	INITIAL RELEASE

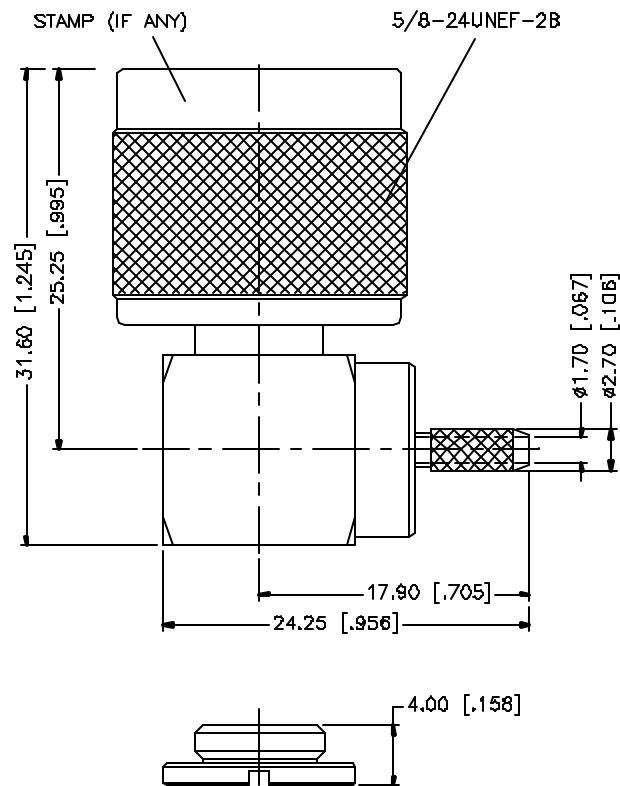

NOTE:

1. CRIMPED FERRULE
HEX. CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8					DRAWN	G.R.S.	03/08/05					
7					CHECKED				PART DESCRIPTION N R/A CRIMP PLUG (FOR RG-316/U DOUBLE BRAID CABLE)			
6					ISSUED							
5	CLAMP NUT	BRASS	NEXCOTE		1	SHEET	1 OF 1		PART NO. 172245			
4	FERRULE	COPPER	NEXCOTE		1							
3	CONTACT PIN	BRASS	GOLD		1			DWG. NO. 172245.DWG REV. NC SIZE A SCALE NA				
2	INSULATOR	TEFLON	NATURAL		1							
1	BODY	BRASS	NEXCOTE	1								
DESCRIPTION		MATERIAL	FINISH	QTY	CAD FILE C:/172/172245.DWG							